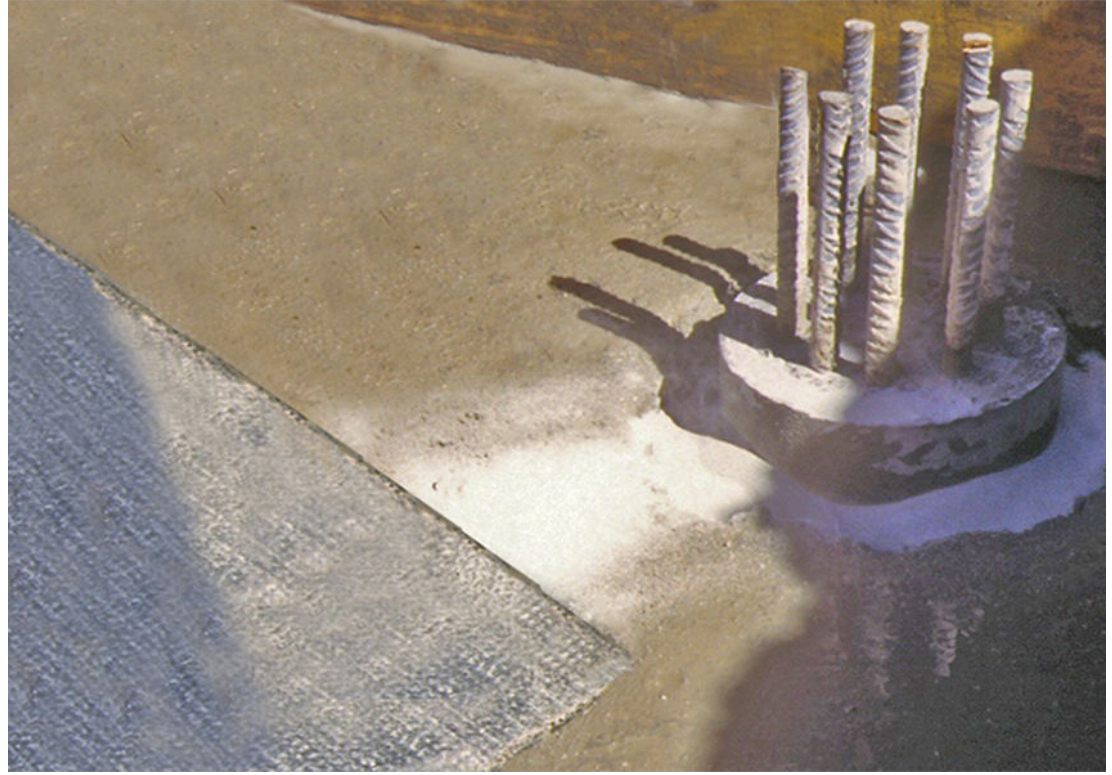



**PRODUCT DESCRIPTION**

GRANULAR SODIUM BENTONITE is mainly used as a detailed accessory product in waterproofing systems. It can be used dry or pre-hydrated and in confinement conditions it will form a dense waterproof “paste” for accurate waterproofing reinforcements.

**PRODUCT APPLICATION**

- To fill cavities or gaps in the substrate before installing the waterproofing membrane/system

ADVANTAGES

- Practical and fast for accurate applications
- Also applicable on damp and very uneven surfaces

PREPARATION AND APPLICATION

GRANULAR SODIUM BENTONITE is ready for use.

All surfaces on which GRANULAR SODIUM BENTONITE is to be applied must be free of dirt, grease, rust, oil, hardening agents or other contaminants and without water flow.

Apply GRANULAR SODIUM BENTONITE before installing the waterproofing membrane, unless otherwise specified in a specific detail.

PACKAGING AND STORAGE

Supplied in 25 kg bags.

The product must be stored in a dry place without being exposed to frost and heat (maximum temperature: 40 °C) or direct exposure to the sun before being applied.

WARNINGS - IMPORTANT NOTES

It is not designed to function as an expansion joint sealant.

It is not an adhesive.

It must not be left exposed for a prolonged period before applying the concrete or filling material.

Only use GRANULAR SODIUM BENTONITE in applications with suitable confinement.

The filling soils must have an appropriate grain in order to be suitably compacted.

PHYSICAL AND TECHNICAL SPECIFICATIONS**Technical parameters**

Technical parameters	Valore	Test method
Smectite Content	Min 75%	XRD
Fluid Loss	18 ml Max	ASTM D 5891
Free swelling	> 24 ml/2g Min	ASTM D 5890



BENTONITE SODICA GRANULARE

Chemical composition

Chemical composition	Values
Silica	58.50% (SiO ₂)
Ferric oxide	5.05% (Fe ₂ O ₃)
Allumina	12.08% (Al ₂ O ₃)
Manganese monoxide	0.7% (MnO)
Potassium oxide	0.3% (K ₂ O)
Titanium dioxide	0,94% (TiO ₂)
Magnesium	2.08% (MgO)
Sodium and potassium	2.15% (Na ₂ O)
Calcium	1.37% (CaO)
Other minor components	18.82%

SAFETY Refer to the related Safety Data Sheet.

COPYRIGHT © Copyright Volteco S.p.A. - All rights reserved.
Information, images and text found in this document are exclusive property of Volteco S.p.A.
They may change anytime without prior notice.
Updated versions of this and other documentation (specification, brochure, other) are on www.volteco.com.
In case of translation text may contain technical and linguistic inaccuracies.

LEGAL NOTES Note for buyer/installer:
This document prepared by Volteco S.p.A. is provided as an aid and guideline for the buyer/installer.
This does not take into consideration the details of each single operational context, for which Volteco S.p.A. will not be held liable.
This does not change and does not extend the obligations of Volteco S.p.A.
It may vary and the installer is therefore required to update his/her information prior to each application by referring to www.volteco.com.
The above clarifications extend to the pre-post-sales technical/commercial information of the commercial network.