



CALIBRO PLUS EVAPORATION

PRODUCT DESCRIPTION

CALIBRO PLUS EVAPORATION is a dehumidifying system formulated to restore plaster on damp walls, both indoors and outdoors.

It is comprised of two restoring, dehumidifying components, CALIBRO RINZAFFO and CALIBRO P.E. INTONACO, to be used one after the other.



PRODUCT APPLICATION

- Walls with evident humidity and salt deposits caused by capillary rising damp
- To create anti-condensation plaster

ADVANTAGES

- Suitable to coat all types of walls
- It guarantees long-lasting sound and stable restoration
- It inhibits the development of any form of condensation
- Also machine-applicable
- Suitable for both indoor and outdoor application

PREPARATION AND APPLICATION The preparation and installation data refer to normal environmental conditions (temperature +20°C; relative humidity 60%).

Preparing the surfaces

Remove the existing plaster up to 50 – 100 cm above the highest visible line of the rising damp. Remove all loose and brittle parts, which could prevent even adhesion to the surface. In case of high salt concentration, scrape or brush the wall until the original masonry is visible. Should there be damaged parts on the wall, these must be restored with new material.

Preparing and applying the mixture

Both CALIBRO P.E. components can be mixed using a concrete mixer or a planetary mixer. CALIBRO RINZAFFO can also be mixed with a whip-fitted drill. The dehumidifying system is applied in two subsequent layers as follows:

1st Layer of CALIBRO RINZAFFO

Preparing the mixture

With the concrete or planetary mixer ON, pour 6 L of water (equal to 24% by weight), slowly add CALIBRO RINZAFFO and mix for 3-5 minutes until a creamy texture is obtained.

The same procedure must be carried out when mixing with whip-fitted drill, by pouring 6 l of water into a pot and then slowly pouring in the CALIBRO RINZAFFO product, mixing for 2-3 minutes at medium speed until you obtain a creamy mixture.

Application



CALIBRO PLUS EVAPORATION

First fill the cavities and level the surface, then apply the rough coat evenly with a minimum thickness of 5 mm.

The CALIBRO RINZAFFO surface must be rough to allow a better grip of CALIBRO P.E. INTONACO.

2nd Layer of CALIBRO P.E. INTONACO

Apply CALIBRO P.E. INTONACO, the day after applying CALIBRO RINZAFFO, with a minimum thickness of 2 cm.

For thicknesses greater than 3 cm, apply in several layers at a distance of at least 24 hours from each other; it is recommended to roughen the surface of the base layer in order to optimise adhesion of the next layer.

In the presence of walls, mixed or out of plumb by more than 3-4 cm and with non-consistent plaster thicknesses, create a first layer of regularising plaster in which it is recommended to use REVOMAT mesh (see relevant technical data sheet) fixed to the masonry with CONNECTORS 20 (see relevant technical data sheet).

Preparing the mixture

Pour 5 L of water into the concrete mixer or planetary mixer (equal to 25% by weight) and then slowly add CALIBRO P.E. INTONACO mixing for at least 5 minutes until you obtain a creamy mixture.

Manual application

Apply the layer of plaster, levelling it with a simple straight edge or adjusters to maintain the thickness without crushing the product.

Sprayed application

It is possible to apply it with a plastering machine with a smoothing wand after mixing the product separately.

Therefore pour the plaster, which has been previously mixed in a concrete or planetary mixer, into the hopper of the plastering machine.

Spray a layer of plaster, paying attention to optimise the amount of air used according to the flow of mortar allowed by the plastering machine.


Watch the product video

YOUTUBE VIDEO



Surface finish

The finishing is carried out once the curing process is complete, after at least 14 days, using X-LIME and PAINT AIR (see relevant technical data sheets) or paint that does not alter the breathability characteristics of CALIBRO P.E. significantly.

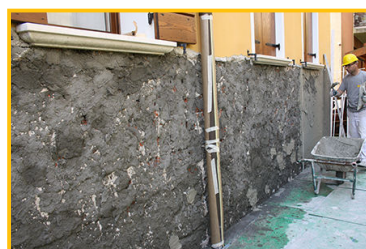

References available at www.volteco.com

CONSUMPTION AND YIELD

CALIBRO RINZAFFO: 6÷6.5 kg/m² per 0.5 cm in thickness, depending on the roughness of the surface.
CALIBRO P.E. INTONACO: 9÷9.5 kg/m² per cm in thickness, depending on the roughness of the surface.

PACKAGING AND STORAGE

CALIBRO RINZAFFO and CALIBRO P.E. INTONACO are packaged respectively in 25 kg and 20 kg bags.

The products must be stored in a dry place protected from sun and humidity.

CALIBRO PLUS EVAPORATION in the original packaging has a storage time of 18 months



WARNINGS - IMPORTANT NOTES Do not add water to extend the pot life.
If the product is used with anti-condensation function, provide suitable ventilation in the rooms where the system is applied.
The preparation and installation data refer to normal environmental conditions (temperature +20 °C; relative humidity 60%).
With heterogeneous substrates and variable mortar thicknesses, consult the Volteco Technical Service.

PHYSICAL AND TECHNICAL SPECIFICATIONS "RINZAFFO"

| Specification | Values |
|----------------------------|-------------------------------------|
| Appearance | dark grey powder |
| Mixture consistency | sprayable |
| Maximum aggregate size | 2.4 mm |
| Workability time at +20 °C | 30' |
| Application temperature | from +5 °C to +30 °C |
| Mixture ratio | 100 parts powder 24 parts liquid |

| Parameters subject to company Quality Control | Test method | Values |
|--|----------------|--|
| Mixture bulk density | UNI EN 1015-6 | < 1.6 kg/l |
| Air content | UNI EN 1015-7 | > 15% |
| Compressive strength after 7 days after 28 days | UNI EN 1015-11 | > 5 N/mm ² > 6 N/mm ² |
| Bond strength | UNI EN 1015-12 | > 0.5 N/mm ² |

PHYSICAL AND TECHNICAL SPECIFICATIONS "INTONACO"

| Specification | Values |
|------------------------------------|-------------------------------------|
| Appearance | light grey powder |
| Mixture consistency | thixotropic |
| Application temperature | from +5 °C to +30 °C |
| Maximum aggregate size | 1.2 mm |
| Workability time at +20 °C | 30' |
| Thermal conductivity (UNI EN 1745) | 0.35 W/mK (tabulated value) |
| Reaction to fire (UNI EN 13501-1) | Class A1 |
| Mixture ratio | 100 parts powder 25 parts liquid |

| Parameters subject to company Quality Control | Test method | Values |
|---|----------------|---|
| Apparent bulk density | UNI EN 1015-10 | 0.9÷1.2 kg/l |
| Mixture bulk density | UNI EN 1015-6 | 0.95÷1.15 kg/l |
| Air content | UNI EN 1015-7 | > 30% |
| Water vapour permeability coefficient μ | UNI EN 1015-19 | < 15 |
| Compressive strength after 28 days | UNI EN 1015-11 | < 5 N/mm ² (category CS II) |
| Bond strength | UNI EN 1015-12 | > 0.1 N/mm ² (B-type breaking) |
| Capillary water absorption | UNI EN 1015-18 | > 0.3 kg*m ⁻² *h ^{-0.5} |

The quoted data are obtained in a laboratory at +20 °C and 60% RH.

SAFETY Refer to the related Safety Data Sheet.



CALIBRO PLUS EVAPORATION

| | |
|--|---|
| CE | VOLTECO S.p.a Via delle Industrie, 47 - 31050 Ponzano Veneto (I) |
| | 05 DOP 0012 EN 998-1:2004 CALIBRO P.E. INTONACO Mortar for outdoor and indoor plaster - mortar for type R restoration |
| Reaction to fire: Class A1 | |
| Apparent bulk density: 0.9÷1.2 kg/l | |
| Compressive strength: Class CSII | |
| Adhesion: ≥ 0.1 N/mm ² (B-type breaking) | |
| Capillary absorption: ≥ 0.3 kg/m ² (after 24h) | |
| Vapour permeability coefficient: $\leq 15 \mu$ | |
| Thermal conductivity (tabulated value): 0.35 W/mK | |
| Air content: $> 30\%$ | |
| Mixture bulk density: 0.95÷1.15 kg/l | |
| Hazardous substances: See SDS | |

COPYRIGHT

© Copyright Volteco S.p.A. - All rights reserved.
Information, images and text found in this document are exclusive property of Volteco S.p.A.
They may change anytime without prior notice.
Updated versions of this and other documentation (specification, brochure, other) are on www.volteco.com.
In case of translation text may contain technical and linguistic inaccuracies.

LEGAL NOTES

Note for buyer/installer:
This document prepared by Volteco S.p.A. is provided as an aid and guideline for the buyer/installer.
This does not take into consideration the details of each single operational context, for which Volteco S.p.A. will not be held liable.
This does not change and does not extend the obligations of Volteco S.p.A.
It may vary and the installer is therefore required to update his/her information prior to each application by referring to www.volteco.com.
The above clarifications extend to the pre-post-sales technical/commercial information of the commercial network.