









PRODUCT CATALOGUE

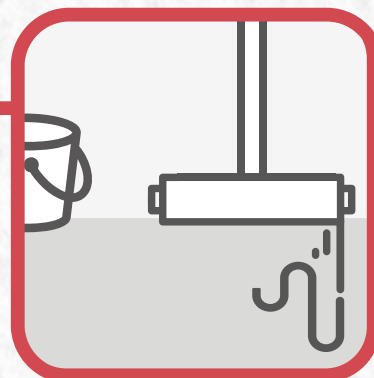





Categories

WATERPROOFING

	Synthetic hydro-reactive membranes	pag. 7
	Bentonite hydro-reactive membranes	pag. 9
	Flexible liquid systems	pag. 11
	Joint covers, reinforced nets	pag. 12
	Profiles and drainages	pag. 13
	Waterproof mortars - Rapid-setting mortars	pag. 14
	Reinforcement nets - Anchors	pag. 16





JOINTS AND SEALANTS

		Waterstops - Hydro-expanding mastics	pag. 21
		Joint covers - Profiles - Reinforcement meshes	pag. 24

DAMP-PROOF RENOVATION

	Damp-proof restoration systems	pag. 29
---	--------------------------------	---------

RECOVERY AND PROTECTION

	Repair mortars	pag. 33
	Reinforcement nets - Anchors	pag. 34
	Waterproof levelling compounds	pag. 36
	Primers - Paints	pag. 38

WORK TOOLS

pg. 41

Product index

AKTI-VO 201	pag. 8-22
AKTI-VO BS	pag. 10
AMPHIBIA 3000 GRIP	pag. 7
AMPHIBIA ACCESSORI	pag. 8
AQUASCUD SYSTEM 420	pag. 11
AQUASCUD SYSTEM 430	pag. 11
AQUASCUD BASIC	pag. 12
AQUASCUD LINE	pag. 13
AQUASCUD REFLEX	pag. 11
AQUASCUD JOIN	pag. 12
AQUASCUD JOIN BT	pag. 12
AQUASCUD ESALATORI/COLLETTORI	pag. 12
BI FIX 300	pag. 17-35
BI FLEX SYSTEM	pag. 24
BI BOND	pag. 24
BI MASTIC	pag. 8-25
BI MORTAR CONCRETE SEAL	pag. 14
BI MORTAR LEVELLING SEAL	pag. 14
BI MORTAR PLASTER SEAL	pag. 14
BI MORTAR RASO SEAL	pag. 14
BI MORTAR ULTRA SEAL	pag. 15
CALIBRO NHL	pag. 29
CALIBRO PLUS EVAPORATION INTONACO	pag. 29
CALIBRO RINZAFFO	pag. 29
CONNETTORE IN ACCIAIO	pag. 17-35
CP1	pag. 36
CPØ	pag. 36
CRYSTAL	pag. 40
CRYSTAL POOL	pag. 40
CRYSTAL PURE	pag. 40
FIBRO HFR	pag. 34
FIBROeRASO	pag. 33
FIBROMIX 40	pag. 33
FLEXOMIX 30	pag. 33
FLEXONET	pag. 37
GARVO	pag. 12
GARVO ANGOLARE	pag. 12

GRIPPER	pag. 12
I-PLUG	pag. 15
PAINT AIR	pag. 39
PAINT PROTECTION	pag. 39
PLASTIVO 180	pag. 11
PLASTIVO 250	pag. 11
PROCLEAN	pag. 38
PROFIX 20	pag. 38
PROFIX 30	pag. 38
PROFIX 40	pag. 38
REPOSOL	pag. 24
REVOGRID	pag. 16-34
REVOGRID CORNER	pag. 16-35
REVOGRID CONNECTOR-L	pag. 16-35
REVOMAT	pag. 16-34
SANOFER	pag. 33
SPIDY 15	pag. 15
SUPERBOND	pag. 25
TAP 3	pag. 15
TRIPLEZERO	pag. 30
TRIPLEZERO - T	pag. 37
ULTRABOND	pag. 22
ULTRATACK	pag. 22
VOLGRIP EP	pag. 9
VOLGRIP HP	pag. 9
VOLGRIP LH	pag. 9
VOL-TEC	pag. 23
WT BREAK	pag. 21
WT CONSTRUCTION	pag. 21
WT EXPANSION	pag. 21
WT PANEL	pag. 21
WT STRIP	pag. 21
WT 102	pag. 22
X-LIME	pag. 29-36
XNET	pag. 37

CONTACT US

WE ARE AT YOUR DISPOSAL



Write us on Whatsapp
+39 335 120 9445



Contact us!
export@volteco.it



Download
digital version



It's a waterproof life.


WATERPROOFING



WATERPROOFING



Flexible liquid systems
pag. 11



Joint covers, reinforced nets
pag. 12



Profiles - drainages
pag. 13



Waterproof mortars
- Rapid-setting mortars
pag. 14



Reinforcement nets - Anchors
pag. 16















Synthetic and Bentonite
hydro-reactive membranes
pag. 7/9









It's a waterproof life.

Synthetic hydro-reactive membranes









CODE	PRODUCT DESCRIPTION	m ² /ROLL	N. OF ROLLS FOR PALLET	m ² /PALLET	HS CODE
	 <p>AMPHIBIA 3000 GRIP HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE</p> <ul style="list-style-type: none"> > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks <p>CE UNI EN 13967 BBA - (N° 20/5771) ETN 03/23 EPD 0299</p>     				
RA02	<p>AMPHIBIA 3000 GRIP H. 1.80 size: 180x2000 cm pallet size: 190x120x130 cm</p>	36	20 ROLLS	720	40051000
RA24	<p>AMPHIBIA 3000 GRIP H. 90 size: 90x2000 cm pallet size: 120x100x125 cm</p>	18	20 ROLLS	360	40051000
	 <p>AMPHIBIA 3000 GRIP 1.3 HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE</p> <ul style="list-style-type: none"> > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks <p>CE UNI EN 13967 BBA - (N° 20/5771) ETN 03/23 EPD 0299</p>     				
RA15	<p>AMPHIBIA 3000 GRIP 1.3 H. 1.80 size: 180x2000 cm pallet size: 190x120x130 cm</p>	36	20 ROLLS	720	40051000
RA16	<p>AMPHIBIA 3000 1.3 H. 90 size: 90x2000 cm pallet size: 120x100x125 cm</p>	9	36 ROLLS	324	40051000

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	m/TUBE	HS CODE
RB01	 AMPHIBIA PRESSURE LINE METALLIC PROFILE, COATED ON ONE SIDE WITH AMPHIBIA 3000 - size: 150x5 cm	CARDBOARD TUBE	PCS. 30x1,5 m	45	40051000
RB02	 AMPHIBIA PRESSURE CORNER CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE - size: 150x5x10 cm	CARDBOARD TUBE	PCS. 7x1,5 m	10,5	40051000
RB03	CORNER 90° CORNER 270° CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE AND ADHESIVE BUTYLIC TAPE AMPHIBIA SAFETY TAPE BT - size: 150x5x10 cm				
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
RB05	 AMPHIBIA SAFETY TAPE ADHESIVE TAPE FOR OVERLAPPING PROTECTION WHITE COLOUR - size: 6x2500 cm	BOX	ROLL 25 m	-	39199080
RB08	 AMPHIBIA LAP SEAL BUTYL ADHESIVE TAPE FOR OVERLAPPING SEALING GAS size: 6x1000 cm	BOX	1 ROLL 10 m	-	56031410
RB04	 AMPHIBIA STOPPER PROTECTION CAP FOR CLOSING HOLES FORMWORK, BLACK COLOUR	BAG	50 PCS.	-	39012090
RB09	 AMPHIBIA 3000 STRIP TAPE OF AMPHIBIA 3000 MEMBRANE size: 12x1850 cm	-	ROLL 18,5 m	-	40029910
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
GB17	 AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC 320 CC CARTRIDGES	BOX	PCS. 6	310	32141010
RB11	 BI MASTIC DEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE	BOX	PCS. 12	600	32149000


Bentonite hydro-reactive membranes



CODE	PRODUCT DESCRIPTION	m ² /ROLL	PACKAGING	m ² /PALLET	HS CODE
	 VOLGRIP LH BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE > Natural-based product , it earns points for LEED certification > Insuperable self-confinement > High impermeability > It can be drilled, cut and shaped to adapt to the structure  UNI EN 13491				
A001	* VOLGRIP LH H. 2.50 (LIGHT) size: 250x3000x0,64 cm - weight 5,4 kg/m ² approx	75	ROLL	-	6815990000
A002	* VOLGRIP LH H. 5.00 (LIGHT) size: 250x3000x0,64 cm - weight 5,4 kg/m ² approx	150	ROLL	-	6815990000
A003	* VOLGRIP LH H. 1.10 (LIGHT) size: 110x500x0,64 cm - weight 5,4 kg/m ² approx (960 kg/pallet)	5,50	ROLL	192,50	6815990000
	 VOLGRIP HP BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE WITH INTEGRATED POLYETHYLENE SHEET > Insuperable self-confinement > High impermeability even in difficult sites and in the presence of water with high salinity or polluted > It can be drilled, cut and shaped to adapt to the structure > Natural-based product , it earns points for LEED certification  UNI EN 13491				
AP01	* VOLGRIP HP H. 2.50 (HIGH PERFORMANCE) size: 250x3000x0,64 cm - weight 5,0 kg/m ² approx	75	ROLL	-	6815990000
AP02	* VOLGRIP HP H. 2.50 (HIGH PERFORMANCE) size: 250x3000x0,64 cm - weight 5,0 kg/m ² approx	150	ROLL	-	6815990000
	 VOLGRIP EP BENTONITE - BASED WATERPROOF GEO MEMBRANE FOR ENVIRONMENTAL PROTECTION > Natural-based product , it earns points for LEED certification > It can be drilled, cut and shaped to adapt to the structure > High impermeability even in difficult sites and in the presence of water with high salinity or polluted > Insuperable self-confinement  UNI EN 13361 UNI EN 13362 UNI EN 13492 UNI EN 13493 UNI EN 13382				
AR01	* VOLGRIP EP size: 500x3000x0,64 cm - weight 5,0 kg/m ² approx	150	ROLL	-	6815990000






* Availability to be confirmed in case of order

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	kg/PALLET	HS CODE
AC042	 VOLGROUT SODIUM BENTONITE FOR INJECTIONS	BAG	4 kg	480	25081000
DB04	 SALINE SEAL GRANULAR SODIUM BENTONITE ADDITIVATED WITH POLYMERS	BAG	25 kg	1000	25081000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	n°consumption /m ²	HS CODE
AD051	 FIX 1 - POLYETHYLENE WASHER AND TEMPERED STEEL NAILS size: washer Ø mm 50 - steel nail: lenght mm 30	BOX	500 PCS.	3 PCS.	39012090
AD053	 FIX 5 - POLYETHYLENE WASHER size: washer Ø mm 50	BOX	500 PCS.	3 PCS.	39012090
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
AC044	 AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	BOX	10 PCS.	600 cc/UNIPACK	3214101000
AC045	 AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	PAIL	20 kg	-	3214101000














Flexible liquid systems




CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	m²/PALLET	HS CODE
	PLASTIVO 180 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > Fast curing allowing for short waiting times between the first and second coat and subsequent tiling, even under low temperature conditions (all in 24 hours) > Suitable for application on damp substrates > Suitable for contact with drinking water > Resistant to negative hydrostatic pressure CE UNI EN 14891 EPD 0298 CE UNI EN 1504-2 PRINCIPLE PI, MC e IR				
	PLASTIVO 180 - 15 kg powder + 5 kg liquid component A: cod. ZH001 15 kg powder component B: cod. ZZEHG2 5 kg liquid	3~3,5 kg/m²	BAG + VASE 20 kg	1600	38245090
	PLASTIVO 250 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > High flexibility > Complete waterproofing cycle within one day > Suitable for contact with drinking water > Suitable for contact with purifier water and domestic wastewater CE UNI EN 14891 CE UNI EN 1504-2 PRINCIPLE PI, MC e IR				
	PLASTIVO 250 - 14 kg powder + 6,6 kg liquid component A: cod. ZM001 14 kg powder component B: cod. ZZZM1 6,6 kg liquid	3,5~4 kg/m²	BAG + VASE 20,6 kg	1648	38245090
	AQUASCUD SYSTEM 420 TWO-COMPONENT WATERPROOFING PRODUCT > Fast drying even in low temperature conditions (all within 24 hours) > For waterproofing without demolition . > Low environmental impact thanks to reduced CO2 emissions CE UNI EN 14891				
	AQUASCUD SYSTEM 420 - 15 kg powder + 5,7 kg liquid component A: cod. ZD004 15 kg powder component B: cod. ZZZD5 5,7 kg liquid	3,6~4 kg/m²	BAG + VASE 20,7 kg	1656	38245090
	AQUASCUD SYSTEM 430 TWO-COMPONENT WATERPROOFING PRODUCT > It maintains deformability to -20°C > For waterproofing without demolition . > Resistant to UV radiation > Low environmental impact thanks to reduced CO2 emissions CE UNI EN 14891				
	AQUASCUD SYSTEM 430 - 12 kg powder + 6 kg liquid component A: cod. ZD005 12 kg powder component B: cod. ZZZD6 6 kg liquid	3,2~3,5 kg/m²	BAG + VASE 18 kg	1440	38245090
	AQUASCUD REFLEX READY TO USE REFLECTING WATERPROOF COATING > Excellent resistance to UV radiation > High waterproof performances & crack bridging ability > Suitable for application on bituminous, cementitious membranes and concrete screeds CE UNI EN 1504-2 PRINCIPI, MC e IR				
	AQUASCUD REFLEX	0,6~0,7 kg/m²	VASE 16 kg	-	32091000











































Joint covers, reinforced nets



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	m²/PALLET	HS CODE
CC01	 AQUASCUD BASIC MICROPOROUS ELASTICIZED WATER-REPELLENT FLEECE 30 m² boxes (30x1 m)	BOX	30 mq	960	56031290
CB09	 GRIPPER SKID-PROOF WALKABLE FINISHING POWDER GREY COLOUR ○	BOX	10 KG	-	25059000
CB10	SPECIAL COLOURS AVAILABLE: BROWN ORANGE LIGHT BLUE				
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
EE01	 GARVO due JOINT COVER STRIP REINFORCED WITH THERMO-PLASTIC RUBBER	BOX	25 m	8,5 cm	63079098
ED142	 GARVO 3 JOINT COVER STRIP REINFORCED WITH RUBBER	BOX	20 m	10 cm	63079098
ED141	 GARVO 5 JOINT COVER STRIP REINFORCED WITH RUBBER	BOX	20 m	15 cm	63079098
CD01	 AQUASCUD JOIN ELASTICIZED JOINT COVER BAND	BOX	25 m	10 cm	63079098
CD04	 AQUASCUD JOIN BT ELASTICIZED JOINT COVER BAND WITH ADHESIVE BUTYL RUBBER	BOX	20 m	10 cm	56031410
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
	AQUASCUD JOIN BT ANGULAR PRE-SHAPED BAND COVER, WITH ADHESIVE BUTYL RUBBER	BOX	10 PCS.	12x12 cm	56031410
CD05	 ANGULAR 90°				
CD06	 ANGULAR 270°			10,5x10,5 cm	
	GARVO ANGULAR FELT-COATED RUBBER	BOX	10 PCS.	12x12 cm	63079098
ED144	 ANGULAR 90°				
ED145	 ANGULAR 270°			12x12 cm	
	EXHAUST/DRAINAGE FELT-COATED RUBBER	BOX	2 PCS.	25x25 cm	39219090
CE04	 EXHAUST/DRAINAGE PIPE Ø80 exhaust/drainage pipe: Ø 72 mm pipe size: Ø 80xh23 cm				
CE02	EXHAUST/DRAINAGE PIPE Ø100 Exhaust/drainage pipe Ø 92 mm pipe size: Ø 100xh23 cm				
CE03	 GARVO QUADRO JOINT COVER STRIP REINFORCED WITH RUBBER	-	1 PC.	40x40 cm	39219090

Profiles and drainages



CODE	PRODUCT DESCRIPTION		PACKAGING CONTENT	QUANTITY	HS CODE
AQUASCUD H.0 LINE EDGING PROFILE WITH DRAINAGE size: 270x8x5,5 cm					
CF09		GREY COLOUR 	TUBE	1 PC. 2,7 m	76041090
CF12		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
AQUASCUD H.10 LINE EDGING PROFILE WITH DOUBLE DRAINAGE size: 270x9x6,5 cm					
CF01		GREY COLOUR 	TUBE	1 PC. 2,7 m	76042990
CF04		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
CODE	PRODUCT DESCRIPTION		CONTENT	QUANTITY	HS CODE
AQUASCUD H.0 CORNER 90° CORNER PROFILE FOR AQUASCUD H.0 LINE size: 21x21x5,5 cm					
CF11		GREY COLOUR 	-	1 PC.	76041090
CF14		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
AQUASCUD H.0 FIXY CONJUNCTION PROFILE FOR AQUASCUD H.0 LINE					
CF10		GREY COLOUR 	BAG	1 PC.	76041090
CF13		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
AQUASCUD H.10 CORNER 90° CORNER PROFILE FOR AQUASCUD H.10 LINE size: 21x21x6,5 cm					
CF03		GREY COLOUR 	-	1 PC.	76042990
CF06		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
AQUASCUD H.10 CORNER 270° CORNER PROFILE FOR AQUASCUD H.10 LINE size: 21x21x6,5 cm					
CF07		GREY COLOUR 	-	1 PC.	76041090
CF08		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			
AQUASCUD H.10 FIXY CONJUNCTION PROFILE FOR AQUASCUD H.10 LINE					
CF02		GREY COLOUR 	BAG	1 PC.	76041090
CF05		SPECIAL COLOURS AVAILABLE:  WHITE  BROWN  ANTHRACITE  COR-TEN			


Waterproof mortars - Rapid-setting mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	BI MORTAR CONCRETE SEAL CEMENT-BASED WATERPROOFING COATING APPLICABLE BY BRUSH > Suitable for both indoor and outdoor application > Particularly resistant to abrasion and impact > Suitable for continuous contact with water > Easy maintenance , also in conditions of high humidity and closed environments  UNI EN 1504-2 PRINCIPI PI, MC e IR				
IL04	BI MORTAR CONCRETE SEAL	2,5~3,0 kg/m²	BAG kg 20	1200	38245090
	BI MORTAR RASO SEAL LEVELLING FIBRE-REINFORCED WHITE COMPOUND WITH WATERPROOFING AND FINISHING FUNCTION > Good surface finish thanks to its fine grain size > Waterproof levelling compound also suitable in conditions of negative hydraulic pressure > Excellent adhesion on most types of substrates such as concrete, mortar, stone, brick > It simplifies and reduces the application phases as it evens out and waterproofs in a single application				
IL07	BI MORTAR RASO SEAL - 20 kg powder + 5 kg liquid component A: cod. ZIL01 20 kg powder component B: cod. ZIL1 5 kg liquid	1,85 kg/m² each mm of thickness	BAG + PAIL kg 25	1500	38245090
	BI MORTAR PLASTER SEAL FIBRE-REINFORCED WATERPROOFING PLASTER > It simplifies and reduces the application phases as it evens out and waterproofs in a single application > Also applicable on uneven surfaces > Excellent adhesion > Excellent resistance to negative pressure  UNI EN 1504-3 CC R3				
IL01	BI MORTAR PLASTER SEAL	18 kg/m² each mm of thickness	BAG kg 25	1200	38245090
	BI MORTAR LEVELLING SEAL CEMENT-BASED READY-MIX, SELF-LEVELLING, POURABLE, HIGH ELASTIC MODULE > Waterproof > High mechanical resistance > Good levelling properties > High resistance anchorings  UNI EN 1504-3 CC R4  UNI EN 1504-6				
IL10	BI MORTAR LEVELING SEAL	19 kg/m² each mm of thickness	BAG kg 25	1200	38245090








Waterproof mortars - Rapid-setting mortars




CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	BI MORTAR ULTRA SEAL THREE COMPONENTS EPOXY-CEMENT BASED WATERPROOF SKIM COAT > High adhesion on a variety of substrates > Compatible with subsequent coatings > Improves substrate preparation > Application versatility				
	IL11 NEW BI MORTAR ULTRA SEAL - 2,2 kg liquid + 8,2 kg liquid + 9,6 kg powder component A: cod. ZZIL11_0 2,2 kg liquid component B: cod. ZZIL11_1 8,2 kg liquid component C: cod. ZIL11 9,6 kg powder	1,5 kg/m ² each mm of thickness	BAG + VASES KG 20	-	39073000
	I-PLUG ULTRA-RAPID WATERPROOF MORTAR > Excellent waterproofing > No shrinkage > Instantaneously block water flows , even if pressurised > High mechanical resistance				
	IC186 I-PLUG	10 kg yields 6 liters of mortar	BAG kg 10	800	38245090
	TAP 3 WATERPROOF QUICK-SETTING HYDRAULIC MORTAR > Excellent waterproofing > Rapid-setting > No shrinkage > High mechanical resistance				
	IC181 TAP 3 - 5 kg	5 kg yields 3 liters of mortar	BOX kg 5	600	38245090
	TAP 3 WATERPROOF QUICK-SETTING HYDRAULIC MORTAR > Excellent waterproofing > Rapid-setting > No shrinkage > High mechanical resistance				
	IC182 TAP 3 - 20 kg	20 kg yields 12 liters of mortar	PAIL kg 20	600	38245090
	SPIDY 15 WATERPROOF QUICK-SETTING MORTAR > Good finish results > High adhesion to concrete and reinforcement bars > Rapid-setting also on surfaces and in particularly damp environments > Excellent thixotropy that does not require the use of formwork				
	FH01 SPIDY 15	19 kg/m ² each cm of thickness	BAG 15 kg	1200	38245090



Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
BE00	 <p>REVOMAT FIBERGLASS MESH ALKALI RESISTANT</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability 				
	REVOMAT H.100 - mesh size: 40x40 mm - lenght 30 m	ROLL	30	100 cm	70196600
FN04	 <p>REVOGRID H.160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments <p> EAD 340392-00-0104 ETA-25/0119</p>				
	REVOGRID H.160 - mesh size: 66x66 mm - lenght 30 m	ROLL	48	160 cm	7019660085
FN05	 <p>REVOGRID CORNER 90° CORNER OF MONOLITHIC PREFORMED GFRP MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments <p> EAD 340392-00-0104 ETA-25/0119</p>				
	REVOGRID CORNER - size: 25x25x160 cm - mesh size: 66x66 cm	WRAPPING	20 PCS.	-	7019660085
FN06	 <p>REVOGRID CONNECTOR-L GFRP L-CONNECTOR</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability <p> EAD 340392-00-0104 ETA-25/0119</p>				
	REVOGRID CONNECTOR-L - size: Ø 6mm - size: 10x20 cm	BOX	100 PCS.	-	7019660085

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
FN03	 CONNETTORI CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING > Solid anchoring thanks to double disc > Allows for the absence of reinforcement mesh in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them > Quick and easy application thanks to the installation guide disc		1 PC.	-	73160000
FN02	CONNETTORE 20 - size: 80 mm (20 + 60 mm)		1 PC.	-	73160000
FN02	CONNETTORE 38 - size: 185 mm (38 + 147 mm)		1 PC.	-	73160000
FN01	 BI FIX 300 AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR > Fast, solid and resolutive anchoring > It can be fastened on horizontal, vertical, inclined or overhead axis > Also suitable for fixing on intact or cracked concrete supports, solid and perforated masonry, stone, wood > Applicable on dry, wet or flooded concrete CE EAD 330499-01-0601 ETA-20/0352		2 PCS.	300	35069190
FN01	BI FIX 300	BOX	2 PCS.	300	35069190

NOTES


JOINTS AND SEALANTS



JONTS AND SEALANTS



**Joint covers - Profiles
Reinforcement Meshes**
pag. 24



**Waterstop
Hydro-expanding Mastics**
pag. 21



It's a waterproof life.

Waterstop - Hydro-expanding mastics



CODE	PRODUCT DESCRIPTION	PACKAGING	M/BOX	M/PALLET	HS CODE
------	---------------------	-----------	-------	----------	---------



WT CONSTRUCTION

EPDM HYDRO-SWELLABLE WATERSTOP REINFORCED WITH STEEL MESH

- > **High resistance** to hydraulic load
- > High hydro-expansive **stability and crack sealing capacity**
- > Excellent **adherence to the surface**
- > **Easy and quick** application by nailing



EAD 320008-01-0605 ETA-24/0387

BF02	WT C 20.10 - size: 20x10 mm - length 10 m Complete with progressive fixing nails	BOX 3 ROLLS	30 m	1440	40051000
BF01	WT C 25.15 - size: 25x15 mm - length 7 m Complete with progressive fixing nails	BOX 3 ROLLS	21 m	1008	40051000



WT EXPANSION

EPDM HYDRO-SWELLABLE WATERSTOP FOR JOINTS

- > **Perfect seal** of expansion joints
- > **High resistance** to hydraulic load
- > **Easy adaptation** to the size of the structure to be waterproofed in correspondence of the expansion joint

BG01	WT E 20.20 - size: 20x20 mm - length 1,2 m	9 BARS	10,80 m	-	40051000
BG02	WT E 30.30 - size: 30x30 mm - length 1,20 m	4 BARS	4,80 m	-	40051000



WT PANEL

EPDM HYDRO-SWELLABLE MODULAR WATERSTOP PANEL

- > High **hydro-expansive** stability and capacity
- > **Easy adaptation** to the size of the structures to be waterproofed in correspondence of the expansion joint
- > **Can be hot-welded, glued, cut** and adapted to the structure
- > **Perfect seal** of expansion joints and transit elements

GE03	WT P 25 - size: mm 250x5 - length m 10	BOX 1 ROLL	10M	300	40051000
GE04	WT P 125 - size: cm 125x5 - length m 1,2	BOX 20 PANEL	24 M	720	40051000

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	M/PALLET	HS CODE
------	---------------------	-----------	---------	----------	---------



WT STRIP

EPDM HYDRO-EXPANDING WATERSTOP TAPE

- > High **hydro-expansive** stability and capacity
- > **Easy adaptation** to the size of the structures to be waterproofed in correspondence of the expansion joint
- > **Can be hot-welded, glued, cut** and adapted to the structure
- > **Perfect seal** of expansion joints and transit elements

BH01	WT STRIP 30.5 - size: 30x5 mm - length 15 m	BOX 5 ROLL	75 m	3600 m	40051000
BH02	WT STRIP 50.5 - size: 50x5 mm - length 15 m	BOX 3 ROLL	45 m	2160 m	40051000



WT BREAK


SELF-SEALING WATERTIGHT BOX ELEMENT DESIGNED TO CONTROL AND SEAL ANY SPONTANEOUS CRACKS THAT DEVELOP IN THE REINFORCED CONCRETE.


- > Perfect **hydraulic water-tightness**
- > Maximum **control of shrinkage** of reinforced concrete
- > Possibility of **preparing continuous concrete castings** without joints
- > Allows the **reinforcement bars** to be laid without interruptions



BC07	WT BREAK - 50.5 size: 17,5x100 cm - thickness 2 cm	BOX	10 m	10 BARS	40051000
------	---	-----	------	---------	----------


Waterstop - Hydro-expanding mastics



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
	ULTRABOND POLIMER-BASED ADHESIVE MASTIC TO INSTALL/FIX ADEKA PROFILES > Solid, long-lasting adhesion with even adhesive distribution > Resistance to high temperatures, plasticisers, oils and lubricants > Effective in thermal and chemical stress applications > Versatile and easy to apply				
GC15	ULTRABOND	CAN	0,85 kg	-	39094000




	ULTRATAK SUCTION EFFECT SEALING ADHESIVE > High initial tack : provides immediate and powerful adhesion, allowing gaskets and rubber profiles to be fixed without the need for temporary supports, adhering quickly to the surface > High adhesion : provides strong and secure bonding between rubber and concrete, resisting mechanical stress and vibration > Elasticity : maintains its flexibility over time, absorbing movement and thermal expansion > Indoor and outdoor application				
BI13	ULTRATAK - includes 20 nozzles	BOX	20 PCS.	600 cc	3214109000

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	M/PALLET	HS CODE
	WT 102 HYDRO-EXPANDING BENTONITE-BASED PROFILE, RED COLOUR COMPLETE WITH RE.VO FIXING NET + PROGRESSIVE NAILS > High resistance to hydraulic load > Easy and quick application > Excellent stability and adherence to the surface > High resistance to hydraulic load				
BD03	ML 10 - size: 25x20 mm - lenght 5 m includes: 2-roll-box + 10 m RE.VO + nails	BOX 2 ROLLS	10 m	320	40059900
BD02	ML 30 - size: 25x20 mm - lenght 5 m includes: 6-roll-box + 30 m RE.VO + nails	BOX 6 ROLLS	30 m	720	40059900
BB00	 RE.VO NET - Fixing yellow polypropilene net + nails	BOX	30 m	50	39023000



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
	AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC > Resolutive intervention on existing structures > Also applicable on wet and very uneven surfaces > It can support significant loads of water > Practical and fast for accurate applications				
GB17	AKTI-VO 201	BOX	6 PCS.	310	32141010

Waterstop - Hydro-expanding mastics








CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
	 VOL-TEC RECTILINEAR ELEMENTS EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD01	VOL-TEC RECTILINEAR ELEMENTS size: L 290 x H 100 mm - thickness 50 mm	BOX	3 PCS.	-	40169300
	 VOL-TEC CORNER ELEMENT EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD02	VOL-TEC CORNER ELEMENT size: 170 x 170 x H 100 mm - thickness 50 mm	BOX	1 PC.	-	40169300
	 VOL-TEC - NO STANDARD NO STANDARD PIECE - EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD04	VOL-TEC - NO STANDARD	-	1 PC.	-	40169300

Accessories


CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
GD03	 VOL-TEC - STRING HYDRO-EXPANDING RUBBER GASKET	ROLL	25 m	-	39169010
	 VOL-TEC DIMA PRE-CAST GUIDE				
GD05	STANDARD - size: thickness 50 mm - length 1 m	BOX	1 PC.	-	48115900
GD06	PER STRING - size: thickness 55 mm - length 1 m	BOX	1 PC.	-	48115900

Joint covers - Profiles - Reinforcement meshes



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH/cm	HS CODE
	BI FLEX SYSTEM TPE POLYMER-BASED ELASTIC BAND > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness , which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water				
	EW05 BI FLEX - H 10 - size: 0,5 mm	BOX	40 m	10	39204910
	EW02 BI FLEX - H 10 - size: 1,0 mm	BOX	20 m	10	39204910
	EW08 BI FLEX - H 15 - size: 1,0 mm	BOX	20 m	15	39204910
	EW01 BI FLEX - H 20 - size: 1,0 mm	BOX	20 m	20	39204910
	EW04 BI FLEX - H 20 - size: 1,5 mm	BOX	15 m	20	39204910
CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	BI BOND EPOXY ADHESIVE FOR BONDING BI-FLEX > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness , which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water				
	EY02 BI BOND - 5 KG (2,5 kg + 2,5 kg) <small>component A - cod. EY12: 2,5 kg component B - cod. EY13: 2,5 kg</small>	1,5÷1,6 kg/m ² per mm thickness	5 kg PAIL + PAIL	500 + 500	39073000
	EY01 BI BOND - 10 KG (5 kg + 5 kg) <small>component A - cod. EY10: 5 kg component B - cod. EY11: 5 kg</small>	0,6 kg/m BI FLEX H. 10 0,8 kg/m BI FLEX H. 15 1,0 kg/m BI FLEX H. 20	10 kg PAIL + PAIL	500 + 500	39073000
	REPOSOL TWO-COMPONENT EPOXY RESIN FOR BONDING AND IMPREGNATION > Simple application > Versatility > High performance				
	HI007 REPOSOL 8 KG (5 kg + 3 kg) <small>(Component A 5 kg + Component B 3 kg) component A - cod. HI003: 5 kg component B - cod. HI004: 3 kg</small>	—	8 kg PAIL + PAIL	—	39073000

Joint covers - Profiles - Reinforcement meshes



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
------	---------------------	-----------	---------	---------	---------



BI MASTIC

DEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE

- > **High thixotropy**, adhesion and durability, and U.resistance
- > **Hygroscopic behaviour**, cross-linked with environmental humidity
- > Also applicable on **damp surfaces**
- > Applicable on a **wide range of surfaces**, both absorbent and non-absorbent

RB11	BI MASTIC	BOX	12 PCS.	600	32149000
------	-----------	-----	---------	-----	----------

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
------	---------------------	-----------	---------	-----------	---------

EU01



SUPERBOND

ADHESIVE MASTIC FOR BONDING OF RUBBER GASKETS ON CONCRETE AND JUNCTION OF JOINT COVERING BANDS with brush dispenser

CAN


0,34 kg

-


35069190

NOTES

DAMP-PROOF RESTORATION



DAMP-PROOF RESTORATION

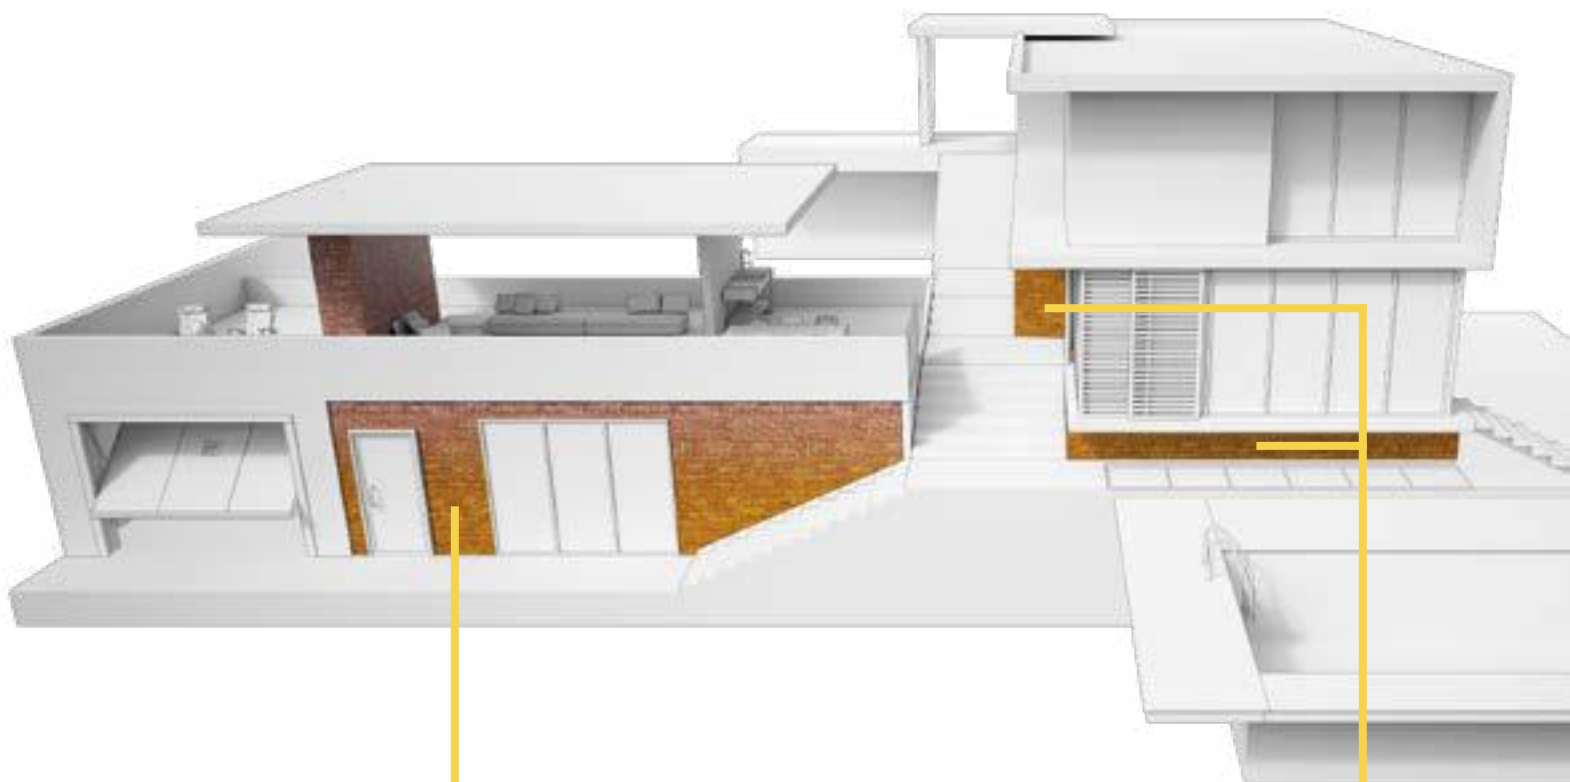





Damp-proof restoration systems
pag. 29

It's a waterproof life.



Damp-proof restoration systems



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
	 CALIBRO RINZAFFO READY-MIX SALT-PROOF RENDER > Suitable to coat all types of walls > It guarantees long-lasting sound and stable restoration > It inhibits the development of any form of condensation > Also machine-applicable				
IE153	CALIBRO RINZAFFO	6~6,5 kg/m ² each 0,5 cm of thickness	BAG kg 25	1200	38245090
	 CALIBRO P.E. INTONACO READY-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSATION-PROOF > Suitable to coat all types of walls > It guarantees long-lasting sound and stable restoration > It inhibits the development of any form of condensation > Also machine-applicable CE UNI EN 998-1				
IA153	CALIBRO P.E. INTONACO	9~9,5 kg/m ² each cm of thickness	BAG kg 20	1200	38245090
	 CALIBRO NHL READY-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 DAMP-PROOF, SALT-PROOF, CONDENSATION-PROOF > Natural lime-based product , NHL according to EN 459 > Eco compatible > 2 in 1 : Rinzaffo and Intonaco in a single solution > Also machine-applicable CE UNI EN 998-1 EPD 0298				
IM001	CALIBRO NHL	10,5~11 kg/m ² each cm of thickness	BAG kg 20	1200	38245090
	 X-LIME LIME-BASED PLASTER FINISHING, WHITE COLOUR > High breathability > Easy workability on existing and newly-built surfaces > Excellent finish results , even in the presence of micro-cracks and old paint > Compatibility with old walls CE UNI EN 998-1				
FM001	X-LIME	1,4 kg/m ² each mm of thickness	BAG kg 20	1200	38245090

Damp-proof restoration systems



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
 TRIPLEZERO SUPER-HYDROPHOBIC ANTI-HUMIDITY CREAMY EMULSION FOR INJECTION. > Ready to use and easy application for injection > Suitable for both indoor and outdoor application > Effective and long-lasting water resistant protection > Odourless and solvent-free 					
HL001	TRIPLEZERO - 600 cc	10 cc x 1 cm of wall thickness x 1 m of wall lenght	BOX 10 PCS.	cc 600/PACK	39100000
HL004	TRIPLEZERO - 15 kg	10 cc x 1 cm of wall thickness x 1 m of wall lenght	VASE 15 kg	-	39100000

RECOVERY AND PROTECTION



RECOVERY AND PROTECTION



Repair Mortars
pag. 33



Waterproof levelling compounds
pag. 36








Reinforcement nets - Anchors
pag. 34



Primers - Paints
pag. 38





It's a waterproof life.



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	SANOFR POLYMERS AND CEMENT-BASED PROTECTIVE COATING FOR ARMOR IRONS > Also effective on rust-corroded rods > Excellent grip for future repair mortars > Easy and quick application > Use directly on exposed steel bars  UNI EN 1504-7				
	FB25	SANOFR 30 g/m bars ø 8 mm 60 g/m bars ø 16 mm	VASE 1 kg	150	38245090
	FIBROMIX 40 CEMENT-BASED READY-MIX, FIBRE-REINFORCED, MEDIUM ELASTIC MODULE > High impermeability > Good resistance against the aggression of atmospheric chemical agents > Excellent adhesion to concrete and reinforcement bars > Light colour  UNI EN 1504-3 CC R4				
	FA262	FIBROMIX 40 18 kg/m ² for each cm of thickness	BAG 25 kg	1200	38245090
	FIBROeRASO SEMI-RAPID THIXOTROPIC MORTAR WITH MEDIUM MODULUS ELASTICITY AND CONTROLLED SHRINKAGE > High impermeability > Easy workability and rapid application > High resistance to carbonation > Excellent adhesion to concrete and reinforcement bars  UNI EN 1504-3 CC R4  UNI EN 1504-2 PRINCIPI MC e IR				
	FA264	FIBROeRASO 17,5 kg/m ² for each cm of thickness	BAG 20 kg	1200	38245090
	FLEXOMIX 30 CEMENT-BASED READY-MIX, LOW ELASTIC MODULE > High impermeability > Good resistance against the aggression of atmospheric chemical agents > Low modulus of elasticity that is capable of following the movements of the structure > Excellent thixotropy that allows the product to be applied without formwork  UNI EN 1504-3 PCC R3				
	FF26	FLEXOMIX 30 16 kg/m ² for each cm of thickness	BAG kg 25	1200	38245090




Repair Mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	FIBRO HFR THREE-COMPONENT FLOWABLE REPAIR MORTAR REINFORCED WITH STEEL FIBERS > The presence of the steel fibre gives it its firm behaviour > Applicable in thicknesses between 1 and 10 cm > Total resistance to carbonation phenomena > Very high mechanical compression and flexural strength				
	 UNI EN 1504-3 CC R4  				
	FI03 FIBRO HFR - COMPONENT A - POWDER		BAG 25 kg	1200	38245090
	FI04 FIBRO HFR - COMPONENT B - LIQUID	25 kg (A + B + C) per cm thickness	VASE 14 kg	616	2909430000
FI05	STEEL FIBERS - COMPONENT C - STEELS		BOX 5 kg	-	83089000
MIXING RATIO 100 KG POWDER + 14 kg LIQUID + 5 kg FIBERS					

Reinforcement nets - Anchors




CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
	REVOMAT FIBERGLASS MESH ALKALI RESISTANT > Good flexibility to facilitate shaping for changes in direction > Excellent durability , unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability				
	BE00 REVOMAT H.100 - mesh size: 40x40 mm - lenght 30 m	ROLL	30	100 cm	70196600
	REVOGRID H.160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH > High mechanical strength : ensures long-lasting, high-performance reinforcement > Lightweight and easy to install : simplifies installation and reduces work times > Compatibility with traditional materials : excellent adhesion with common mortar and masonry > Chemical resistance : resistant to weathering and aggressive environments				
	 EAD 340392-00-0104 ETA-25/0119				
FN04	REVOGRID H.160 - mesh size: 66x66 mm - lenght 30 m	ROLL	48	160 cm	7019660085

NEW

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
------	---------------------	-----------	---------	-------	---------



REVOGRID CORNER

90° CORNER OF MONOLITHIC PREFORMED GFRP MESH

- > **High mechanical strength:** ensures long-lasting, high-performance reinforcement
- > **Lightweight and easy to install:** simplifies installation and reduces work times
- > **Compatibility with traditional materials:** excellent adhesion with common mortar and masonry
- > **Chemical resistance:** resistant to weathering and aggressive environments

NEW



EAD 340392-00-0104 ETA-25/0119

FN05	REVOGRID CORNER - size: 25x25x160 cm - mesh size: 66x66 cm	WRAPPING	20 PCS.	-	7019660085
------	--	----------	---------	---	------------



REVOGRID CONNECTOR-L

GFRP L-CONNECTOR

- > **Good flexibility** to facilitate shaping for changes in direction
- > **Excellent durability,** unalterable in damp and chemically aggressive environments
- > **High tensile strength** (approximately 3 times greater than steel)
- > It features a **special anti-alkaline surface treatment** (finish) which enhances the properties and provides dimensional stability

NEW



EAD 340392-00-0104 ETA-25/0119

FN06	REVOGRID CONNECTOR-L - size: Ø 6mm - size: 10x20 cm	BOX	100 PCS.	-	7019660085
------	---	-----	----------	---	------------

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
------	---------------------	-----------	---------	---------	---------



CONNETTORI

CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING

- > **Solid anchoring** thanks to double disc
- > **Allows for the absence of reinforcement mesh** in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them
- > **Quick and easy application** thanks to the installation guide disc

FN03	CONNETTORE 20 - size: 80 mm (20 + 60 mm)		1 PC.	-	73160000
FN02	CONNETTORE 38 - size: 185 mm (38 + 147 mm)		1 PC.	-	73160000



BI FIX 300

AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR

- > Fast, solid and **resolutive anchoring**
- > It can be fastened on horizontal, vertical, inclined or overhead axis
- > Also **suitable for fixing** on intact or cracked concrete supports, solid and perforated masonry, stone, wood
- > **Applicable on dry, wet or flooded** concrete





EAD 330499-01-0601 ETA-20/0352




FN01	BI FIX 300	BOX	2 PCS.	600	32141010
------	------------	-----	--------	-----	----------

Waterproof levelling compounds









CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
	 X-LIME LIME-BASED PLASTER FINISHING, WHITE COLOUR > High breathability > Easy workability on existing and newly-built surfaces > Excellent finish results , even in the presence of micro-cracks and old paint > Compatibility with old walls  UNI EN 998-1				

FM001	X-LIME	1,4 kg/m ² each mm of thickness	BAG kg 20	1200	38245090
-------	--------	--	--------------	------	----------

	 CP1 WATERPROOFING, ELASTIC, HIGHLY BREATHABLE MINERAL COATING TWO-COMPONENT IN WHITE COLOUR > Breathability and elasticity all in one solution > Extremely effective anti-carbonation barrier to protect the concrete > High protection that extends the service life of the structure > Resistant to the formation and proliferation of fungi, algae and mould  UNI EN 1504-2 PRINCIPI MC e IR 				
--	--	--	--	--	--


ER01	CP1 (15 kg powder + 5,7 kg liquid) component A: cod. ZR001 - 15 kg powder component B: cod. ZZZR1 - 5,7 kg liquid	2,5 kg output a thickness of 2 mm/m ²	BAG + VASE 20,7 kg	1656	38245090
------	--	--	-----------------------	------	----------

CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	GRANULOMETRY	kg/PALLET	HS CODE
	 CPØ ACRYL-SILOSSANIC READY-TO-USE PIGMENTED COATING HIGHLY BREATHABLE, ELASTIC AND WATER-REPELLENT FOR INDOOR AND OUTDOOR USE > Fine aesthetic appearance , available in different sizes > Compact effect, excellent filling and covering capability > Resistant to the formation and proliferation of mould, algae and fungi > Long-lasting thanks to high resistance to atmospheric agents and UV rays  UNI EN 15824				



		0,4 mm			
ER05A	 CPØ (color group A)	1,6 - 1,8 kg/m ²	0,4 mm	VASE 25 kg	32099000
ER05B	CPØ (color group B)				
		1,0 mm			
ER03A	 CPØ (color group A)	1,8 - 2 kg/m ²	1,0 mm	VASE 25 kg	32099000
ER03B	CPØ (color group B)				
		1,2 mm			
ER02A	 CPØ (color group A)	2 - 2,2 kg/m ²	1,2 mm	VASE 25 kg	32099000
ER02B	CPØ (color group B)				
		1,5 mm			
ER04A	 CPØ (color group A)	2,2 - 2,5 kg/m ²	1,5 mm	VASE 25 kg	32099000
ER04B	CPØ (color group B)				

Waterproof levelling compounds



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	 TRIPLEZERO - T SUPERHYDROPHOBIC DAMP-PROOFING CREAMY EMULSION APPLICABLE BY ROLLER/BRUSH/AIRLESS > Suitable for both indoor and outdoor application > Effective and long-lasting transparent protection > Excellent resistance against ageing agents such as UV rays, un/freezing, marine aerosol				
HL002	TRIPLEZERO - T 5 kg	100~400 g/m ²	VASE kg 5	-	39100000
HL005	TRIPLEZERO - T 15 kg	100~400 g/m ²	VASE kg 15	-	39100000




Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	WIDTH	LENGHT	HS CODE
	 XNET MULTIDIRECTIONAL SYNTHETIC COMPOSITE ELASTICIZED NET				
ET07	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	56031290
ET06	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	56031290
ET05	H.100 - size: 50x1 m	ROLL	100 cm	50 m	56031290
	 FLEXONET ELASTIC POLYPROPYLENE REINFORCING NET				
ET03	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	60053500
ET02	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	60053500
ET01	H.100 - size: 50x1 m	ROLL	100 cm	50 m	60053500






CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
EC254	PROCLEAN DISINFECTANT AND ANTIMYCOTIC TREATMENT > It disinfects contaminated surfaces > It does not require dilution with water > Not film-forming > Can be applied in closed and poorly ventilated environments as it is solvent-free	0,15 ℓ/m²	CAN 5 ℓ	-	39069090
			CAN 20 ℓ	-	39069090
EC255	PROCLEAN - 20 ℓ				
EC253	PROFIX 20 POLI-SILOSSANIC AND ACRILIC PRIMING TREATMENT TO CONSOLIDATE AND REGULARIZE THE ABSORPTION OF SUBSTRATES, MOSTLY CONCRETE-BASED > To strengthen the surface , preventing the formation of a superficial film > Removes dust from mineral surfaces > Increases the adhesion of levelling compounds, coatings or finishes in general > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free	0,2÷0,3 ℓ/m²	CAN 5 ℓ	-	39069090
EN01	PROFIX 30 PRIMING TREATMENT TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES > High penetrating power and effective strengthening effect , even with low-porous surfaces > Removes dust from mineral surfaces > It increases adhesion of coatings, finishes and waterproofing products to the surface > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free	0,2÷0,3 ℓ/m²	CAN 5 ℓ	-	39069090
			CAN 25 ℓ	-	39069090
EN02	PROFIX 30 - 25 ℓ				












CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
	PROFIX 40 COLOURED PRIMER FOR CP0 CONSUMPTION, TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES > Good water resistance and vapour permeability > Good coating capacity > It increases the adhesion of CP0, PAINT AIR and PAINT PROTECTION > Can be applied in closed and poorly ventilated environments as it is solvent-free	0,15÷0,3 ℓ/m²	VASE 5 ℓ	-	39069090
	5 LITERS				
	EN05 PROFIX 40 (colors group A)				
	EN06 PROFIX 40 (colors group B)				
	14 LITERS				
EN03	PROFIX 40 (colors group A)	0,15÷0,3 ℓ/m²	VASE 14 ℓ	-	39069090
EN04	PROFIX 40 (colors group B)				
	PAINT AIR ACRYL-SILOSSANIC PAINT, HIGHLY PERMEABLE TO VAPOUR, WATER-REPELLENT, DEFORMABLE, RESISTANT TO ATMOSPHERIC AGENTS > Excellent water repellency > Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) > Highly resistant to UV rays > Vast range of colours available	0,3 ℓ/m²	VASE 14 ℓ	-	32091000
	ES01A PAINT AIR (color group A)				
	ES01B PAINT AIR (color group B)				
	PAINT PROTECTION WATERPROOF STYROL-ACRYLIC PAINT, RESISTANT TO ATMOSPHERIC AGENTS, ANTI-CARBONATION AND EXCELLENT PERMEABILITY TO VAPOUR > Extremely effective anti-carbonation barrier to protect the concrete > Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) > Highly resistant to UV rays > Vast range of colours available CE UNI EN 1504-2	0,4 ℓ/m²	VASE 14 ℓ	-	32091000
	EG24A PAINT PROTECTION (color group A)				
	EG24B PAINT PROTECTION (color group B)				









Primers - Paints



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
	CRYSTAL POOL SINGLE-COMPONENT, SATIN-EFFECT, ACRYLIC RESIN BASED, WATER-DISPERSED, SOLVENT-FREE PAINT AVAILABLE IN WHITE, SAND AND BLUE > Excellent water resistance even with chlorine and chemical agents > Suitable for contact with drinking water > Great resistance to UV radiation > Solvent-free				
EQ16	CRYSTAL POOL WHITE ○				
EQ17	CRYSTAL POOL SAND ●	0,32 - 0,40 ℓ/m ²	VASE 4 ℓ	-	32099000
EQ18	CRYSTAL POOL BLUE ●				
EQ11	CRYSTAL POOL WHITE ○				
EQ12	CRYSTAL POOL SAND ●	0,32 - 0,40 ℓ/m ²	VASE 14 ℓ	-	32099000
EQ13	CRYSTAL POOL BLUE ●				
EQ14	CRYSTAL POOL (color group A) MINIMUM SUPPLY 28 ℓ	0,32 - 0,40 ℓ/m ²	VASE 14 ℓ	-	32099000
EQ15	CRYSTAL POOL (color group B) MINIMUM SUPPLY 28 ℓ				
	CRYSTAL ONE-COMPONENT, TRANSPARENT, OPAQUE, ACRYLIC RESIN BASED, SOLVENT-FREE PAINT > Stable under UV rays and resistant to yellowing > Reduces absorption of water, oil and liquids in general > Colourless (darkening in the surface might occur) > Improves wear resistance				
EQ19	CRYSTAL - 3 ℓ	0,30 - 0,34 ℓ/m ²	VASE 3 ℓ	-	32099000
EQ20	CRYSTAL - 14 ℓ		VASE 14 ℓ		
	CRYSTAL PURE TWO COMPONENTS WATERPROOFING WHITE EPOXY COATING SUITABLE FOR PERMANENT CONTACT WITH DRINKABLE WATER > White colour > Suitable for drinkable water	÷300 g/m ²	12,84 kg		39073000
EQ21	CRYSTAL PURE (8,3 kg + 4,5 kg) component A: base 8,3 kg component B: reagent 4,54 kg				

Work tools

CODE	PRODUCT DESCRIPTION		CONTENT	HS CODE
HGII3		BRUSH	SINGLE PIECE	82055910
HGII10		SPIKE ROLLER - 7 kg FOR THE APPLICATION OF AQUASCUD BASIC, PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
HGII6		SPIKE ROLLER - REPLACEMENT	SINGLE PIECE	960340900
HGII15		SERRATED METAL SQUEEGEE PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	82055910
HGII16		SERRATED TROWEL 3,5 mm FOR THE APPLICATION OF AQUASCUD	SINGLE PIECE	82055910
HGII17		ROUND TROWEL FOR THE APPLICATION OF CP, X-LIME, AQUASCUD	SINGLE PIECE	82055910
HGII18		SERRATED TROWEL 2 mm	SINGLE PIECE	82055910
EP01		PLASTIVO ROLLER PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
EP02		PLASTIVO ROLLER - REPLACEMENT	SINGLE PIECE	960340900

CODE	PRODUCT DESCRIPTION		PACKAGING	CONTENT	HS CODE
HL003		UNIPACK GUN MANUAL SEALING GUN FOR UNIPACK, COMPLETE WITH TRIPLEZERO NOZZLE, INJECTION TUBE, BI MASTIC NOZZLE, AKTI-VO BS NOZZLE	-	SINGLE PIECE	82055980
HL006		KIT TRIPLEZERO COMPLETED WITH INJECTION TUBE OF 1MM	BAG	5 PCS.	82055980
HL008		AKTI-VO BS KIT	BAG	5 PCS.	82055980
HL009		KIT BI FIX	BAG	3 PCS.	82055980
HL010		BI MASTIC KIT	BAG	5 PCS.	82055980
HL011		SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL012		GASKET SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL013		NOZZLE HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980

The company

Established in 1976, after forty-five years of activity, **Volteco** is today a provider of waterproofing solutions for the construction industry. **Volteco** works with passion and commitment on both national and international fields, for companies, through a network of distributors and applicators, cooperating with designers. Choosing **Volteco** means preventing, or solving, the problems caused by water.


Volteco solutions are in fact designed to meet specific needs based on different field of applications:

- Waterproofing of basements;
- Waterproofing of pools and tanks;
- Waterproofing of terraces and flat roofs;
- Treatment of damp walls;
- Facade restoration.

Thanks to a complete service consisting in technical expertise, professional approach and a trained and constantly updated installation network, **Volteco** offers personalized advice at every stage of the construction process. **Volteco** is a specialist in his field, the Specialist of Waterproofing!



WHAT CAN WE OFFER?



PREMIUM
WATERPROOFING
PRODUCTS



MORE THAN
2300
CASE HISTORIES



PROJECTS IN
MORE THAN
40 COUNTRIES



MORE THAN
300
QUALIFIED INSTALLERS

It's a waterproof life.

Volteco's Services at your disposal

> **Services for
the designer**

BIM
Building Information Modeling
CUSTOMIZE YOUR PROJECT


> **Support for
professionals
and installers**



> **Qualified installers**



More than 2.200 references:
> **www.volteco.com**





VOLTECO S.p.A.
Via delle Industrie, 47
31050 Ponzano Veneto (TV) Italy
tel. +39 0422 9663 - fax +39 0422 966401
volteco@volteco.it
www.volteco.com



COMPANY CERTIFIED MANAGEMENT SYSTEM QUALITY - ISO
9001 - ENVIRONMENT ISO 14001 - SAFETY ISO 45001

The information, images and text found in this illustrative brochure are the property of Volteco spa; they are purely indicative and subject to change at any time without prior notice. The updated version of this documentation is found on www.volteco.com.

AT | D | 03 | 00 | 06/2025 | EN