PRODUCT CATALOGUE











Categories

WA	VT/12) H	RPROOFING	
		Synthetic hydro-reactive membranes	pag. 7
		Bentonite hydro-reactive membranes	pag. 9
3		Flexible liquid systems	pag. 11
		Joint covers, reiforced nets	pag. 12
		Profiles and drainages	pag. 13
		Waterproof mortars - Rapid-setting mortars	pag. 14
		Reinforcement nets - Anchors	pag. 16
JO	INT:	S AND SEALANTS	
	()°	Waterstops - Hydro-expanding mastics	pag. 21
	A Company	Joint covers - Profiles - Reinforcement meshes	pag. 24
DA	MP-	PROOF RENOVATION	
	B. 777	Damp-proof restoration systems	pag. 29
RE	COZ	VERY AND PROTECTION	
		Repair mortars	pag. 33
		Reinforcement nets - Anchors	pag. 34
		Waterproof levelling compounds	pag. 36
		Primers - Paints	pag. 38

WORK TOOLS pg. 41

Product index

AKTI-VO 201	pag. 8-22
AKTI-VO BS	pag. 10
AMPHIBIA 3000 GRIP	pag. 7
AMPHIBIA ACCESSORI	pag. 8
AQUASCUD SYSTEM 420	pag. 11
AQUASCUD SYSTEM 430	pag. 11
AQUASCUD BASIC	pag. 12
AQUASCUD LINE	pag. 13
AQUASCUD REFLEX	pag. 11
AQUASCUD JOIN	pag. 12
AQUASCUD JOIN BT	pag. 12
AQUASCUD ESALATORI/COLLETTORI	pag. 12
BI FIX 300	pag. 17-35
BI FLEX SYSTEM	pag. 24
BI BOND	pag. 24
BI MASTIC	pag. 8-25
BI MORTAR CONCRETE SEAL	pag. 14
BI MORTAR LEVELLING SEAL	pag. 14
BI MORTAR PLASTER SEAL	pag. 14
BI MORTAR RASO SEAL	pag. 14
BI MORTAR ULTRA SEAL	pag. 15
CALIBRO NHL	pag. 29
CALIBRO PLUS EVAPORATION INTONACO	pag. 29
CALIBRO RINZAFFO	pag. 29
CONNETTORE IN ACCIAIO	pag. 17-35
CP1	pag. 36
CPØ	pag. 36
CRYSTAL	pag. 40
CRYSTAL POOL	pag. 40
CRYSTAL PURE	pag. 40
FIBRO HFR	pag. 34
FIBROeRASO	pag. 33
FIBROMIX 40	pag. 33
FLEXOMIX 30	pag. 33
FLEXONET	pag. 37
GARVO	pag. 12
GARVO ANGOLARE	pag. 12
	AKTI-VO BS AMPHIBIA 3000 GRIP AMPHIBIA ACCESSORI AQUASCUD SYSTEM 420 AQUASCUD BASIC AQUASCUD LINE AQUASCUD LINE AQUASCUD JOIN AQUASCUD JOIN BT AQUASCUD ESALATORI/COLLETTORI BI FIX 300 BI FIEX SYSTEM BI BOND BI MASTIC BI MORTAR CONCRETE SEAL BI MORTAR LEVELLING SEAL BI MORTAR RASO SEAL BI MORTAR ULTRA SEAL CALIBRO NHL CALIBRO PLUS EVAPORATION INTONACO CALIBRO RINZAFFO CONNETTORE IN ACCIAIO CP1 CPØ CRYSTAL CRYSTAL POOL CRYSTAL PURE FIBRO HFR FIBRO HFR FIBRO HFR FIBRO MIX 30 FLEXONIT GARVO

GRIPPER	pag.	12
I-PLUG	pag.	15
PAINT AIR	pag.	39
PAINT PROTECTION	pag.	39
PLASTIVO 180	pag.	11
PLASTIVO 250	pag.	11
PROCLEAN	pag.	38
PROFIX 20	pag.	38
PROFIX 30	pag.	38
PROFIX 40	pag.	38
REPOSOL	pag.	24
REVOGRID	pag.	16-34
REVOGRID CORNER	pag.	16-35
REVOGRID CONNECTOR-L	pag.	16-35
REVOMAT	pag.	16-34
SANOFER	pag.	33
SPIDY 15	pag.	15
SUPERBOND	pag.	25
TAP 3	pag.	15
TRIPLEZERO	pag.	30
TRIPLEZERO - T	pag.	37
ULTRABOND	pag.	22
ULTRATACK	pag.	22
VOLGRIP EP	pag.	9
VOLGRIP HP	pag.	9
VOLGRIP LH	pag.	9
VOL-TEC	pag.	23
WT BREAK	pag.	21
WT CONSTRUCTION	pag.	21
WT EXPANSION	pag.	21
WT PANEL	pag.	21
WT STRIP	pag.	21
WT 102	pag.	22
X-LIME	pag.	29-36
XNET	pag.	37

CONTACT: US

WE ARE AT YOUR DISPOSAL





Write us on Whatsapp +39 335 120 9445



Contact us! export@volteco.it






Download digital version







WATERPROOFING

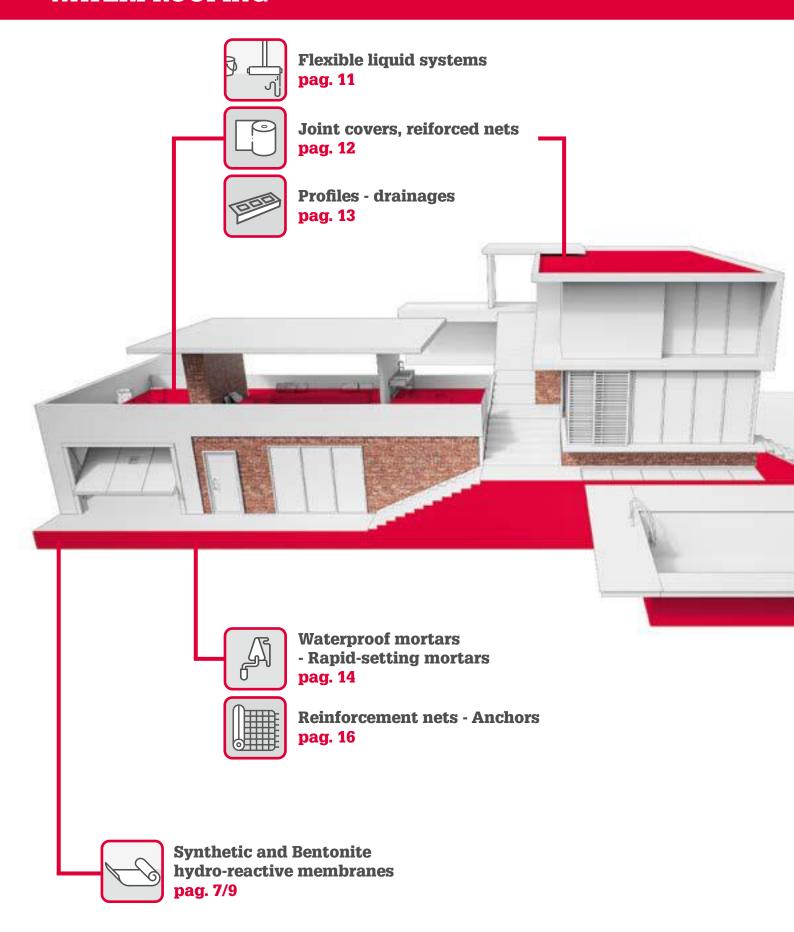

Synthetic hydro-reactive membranes

AMPHIBIA 3000 GRIP 1.3 H. 1.80



N. OF ROLLS FOR PALLET **CODE** PRODUCT DESCRIPTION m²/ROLL m²/PALLET **HS CODE AMPHIBIA 3000 GRIP** HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks € UNI EN 13967 BBA - (N° 20/5771) ETN 03/23 EPD 0299 - EEO AMPHIBIA 3000 GRIP H. 1.80 20 ROLLS size: 180x2000 cm **RA02** 36 720 40051000 pallet size: 190x120x130 cm AMPHIBIA 3000 GRIP H. 90 size: 90x2000 cm 20 ROLLS 18 360 40051000 **RA24** pallet size: 120x100x125 cm AMPHIBIA 3000 GRIP 1.3 HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks € UNI EN 13967 BBA - (N° 20/5771) ETN 03/23 FPD 0299

RA15	size: 180x2000 cm pallet size: 190x120x130 cm	36	ROLLS	720	40051000
RA16	AMPHIBIA 3000 1.3 H. 90 size: 90x2000 pallet size: 120x100x125 cm	9	36 ROLLS	324	40051000

Accessories

CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	m/TUBE	HS CODE
RBO1	/	AMPHIBIA PRESSURE LINE METALLIC PROFILE, COATED ON ONE SIDE WITH AMPHIBIA 3000 - size: 150x5 cm	CARDBOARD TUBE	PCS. 30x1,5 m	45	40051000
RB02		AMPHIBIA PRESSURE CORNER CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE - size: 150x5x10 cm CORNER 90°	CARDBOARD TUBE	PCS. 7x1,5 m	10,5	40051000
RBO3		CORNER 270° CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE AND ADHESIVE BUTYLIC TAPE AMPHI- BIA SAFETY TAPE BT - size: 150x5x10 cm	TOBL	7x1,5 m		
CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
RB05	0	AMPHIBIA SAFETY TAPE ADHESIVE TAPE FOR OVERLAPPING PROTECTION WHITE COLOUR - size: 6x2500 cm	ВОХ	ROLL 25 m	-	39199080
RB08		AMPHIBIA LAP SEAL BUTYL ADHESIVE TAPE FOR OVERLAPPING SEALING GAS size: 6x1000 cm	вох	1 ROLL 10 m	-	56031410
RBO4	41	AMPHIBIA STOPPER PROTECTION CAP FOR CLOSING HOLES FORMWORK, BLACK COLOUR	BAG	50 PCS.	-	39012090
RBO9		AMPHIBIA 3000 STRIP TAPE OF AMPHIBIA 3000 MEMBRANE size: 12x1850 cm	-	ROLL 18,5 m	-	40029910
CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
GB17		AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC 320 CC CARTRIDGES	вох	PCS. 6	310	32141010
RB11		BI MASTIC DEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE	вох	PCS. 12	600	32149000

Bentonite hydro-reactive membranes



CODE	PRODUCT DESCRIPTION	m ² /ROLL	PACKAGING	m²/PALLET	HS CODE
	VOLGRIP LH BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE Natural-based product, it earns points for LEED certification Insuperable self-confinement High impermeability It can be drilled, cut and shaped to adapt to the structure				
A001	* VOLGRIP LH H. 2.50 (LIGHT) size: 250x3000x0,64 cm - weight 5,4 kg/m² approx	75	ROLL	-	6815990000
A002	* VOLGRIP LH H. 5.00 (LIGHT) size: 250x3000x0,64 cm - weight 5,4 kg/m² approx	150	ROLL	-	6815990000
A003	* VOLGRIP LH H. 1.10 (LIGHT) size: 110x500x0,64 cm - weight 5,4 kg/m² approx (960 kg/pallet)	5,50	ROLL	192,50	6815990000
	VOLGRIP HP BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE WITH INTEGRATED POLYETHYLENE SHEET Insuperable self-confinement High impermeability even in difficult sites and in the presence of water with high salinity or polluted It can be drilled, cut and shaped to adapt to the structure Natural-based product, it earns points for LEED certification				
AP01	* VOLGRIP HP H. 2.50 (HIGH PERFORMANCE) size: 250x3000x0,64 cm - weight 5,0 kg/m² approx	75	ROLL	-	6815990000
AP02	* VOLGRIP HP H. 2.50 (HIGH PERFORMANCE) size: 250x30000x0,64 cm - weight 5,0 kg/m² approx	150	ROLL	-	6815990000
	VOLGRIP EP BENTONITE - BASED WATERPROOF GEO MEMBRANE FOR ENVIRONMENTAL PROTECTION Natural-based product, it earns points for LEED certification It can be drilled, cut and shaped to adapt to the structure High impermeability even in difficult sites and in the presence of water with high salinity or polluted Insuperable self-confinement UNI EN 13361 UNI EN 13362 UNI EN 13492 UNI EN 13493 UNI EN 13382				
AR01	* VOLGRIP EP size: 500x3000x0,64 cm - weight 5,0 kg/m² approx	150	ROLL	-	6815990000

^{*} Availability to be confirmed in case of order

Accessories

CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	kg/PALLET	HS CODE
AC042	20 margins 20 mm	VOLGROUT SODIUM BENTONITE FOR INJECTIONS	BAG	4 kg	480	25081000
DB04	dre-	SALINE SEAL GRANULAR SODIUM BENTONITE ADDITIVATED WITH POLYMERS	BAG	25 kg	1000	25081000
CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	n°consumption /m²	HS CODE
AD051		FIX 1 - POLYETHYLENE WASHER AND TEMPERED STEEL NAILS size: washer \varnothing mm 50 - steel nail: lenght mm 30	ВОХ	500 PCS.	3 PCS.	39012090
AD053		FIX 5 - POLYETHYLENE WASHER size: washer Ø mm 50	ВОХ	500 PCS.	3 PCS.	39012090
CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
AC044		AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	ВОХ	10 PCS.	600 cc/UNIPACK	3214101000
AC045	- 00	AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	PAIL	20 kg	-	3214101000

Flexible liquid systems



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
180	PLASTIVO 180 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > Fast curing allowing for short waiting times between the first and second coat and subsequent tiling, even under low temperature conditions (all in 24 hours) > Suitable for application on damp substrates > Suitable for contact with drinking water > Resistant to negative hydrostatic pressure UNI EN 14891 EPD 0298 UNI EN 1504-2 PRINCIPLE PI, MC e IR				
EH25	PLASTIVO 180 - 15 kg powder + 5 kg liquid component A: cod. ZH001 15 kg powder component B: cod. ZZEHG2 5 kg liquid	3~3,5 kg/m²	BAG + VASE 20 kg	1600	38245090
250	PLASTIVO 250 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > High flexibility > Complete waterproofing cycle within one day > Suitable for contact with drinking water > Suitable for contact with purifier water and domestic wastewater UNI EN 14891 UNI EN 1504-2 PRINCIPLE PI, MC e IR				
EM01	PLASTIVO 250 - 14 kg powder + 6,6 kg liquid component A: cod. ZM001 14 kg powder component B: cod. ZZZM1 6,6 kg liquid	3,5~4 kg/m²	BAG + VASE 20,6 kg	1648	38245090
OD STORY	AQUASCUD SYSTEM 420 TWO-COMPONENT WATERPROOFING PRODUCT > Fast drying even in low temperature conditions (all within 24 hours) > For waterproofing without demolition. > Low environmental impact thanks to reduced CO2 emissions				
CB06	AQUASCUD SYSTEM 420 - 15 kg powder + 5,7 kg liquid component A: cod. ZD004 15 kg powder component B: cod. ZZZD5 5,7 kg liquid	3,6~4 kg/m²	BAG + VASE 20,7 kg	1656	38245090
DEPOS (S)	AQUASCUD SYSTEM 430 TWO-COMPONENT WATERPROOFING PRODUCT It maintains deformability to -20°C For waterproofing without demolition. Resistant to UV radiation Low environmental impact thanks to reduced CO2 emissions UNI EN 14891				
CB07	AQUASCUD SYSTEM 430 - 12 kg powder + 6 kg liquid component A: cod. ZD005 12 kg powder component B: cod. ZZZD6 6 kg liquid	3,2~3,5 kg/m²	BAG + VASE 18 kg	1440	38245090
NAME OF TAXABLE PARTY.	AQUASCUD REFLEX READY TO USE REFLECTING WATERPROOF COATING > Excellent resistance to UV radiation > High waterproof performances & crack bridging ability > Suitable for application on bituminous, cementious membranes and concrete screeds UNI EN 1504-2 PRINCIPI, MC e IR				
CB11	AQUASCUD REFLEX	0,6~0,7 kg/m²	VASE 16 kg	-	32091000

Joint covers, reinforced nets



CODE	PRODU	CT DESCRIPTION	PACKAGING	CONTENT	m ² /PALLET	HS CODE
CC01	MICROP	SCUD BASIC OROUS ELASTICIZED WATER-REPELLENT FLEEC DIXES (30x1 m)	e BOX	30 mq	960	56031290
CB09	S C	GRIPPER KID-PROOF WALKABLE FINISHING POWDER SPECIAL BROWN ORANGE LIG	HT BLUE BOX	10 KG	-	25059000
CB10		COLOURS AVAILABLE:	•			
CODE	PRODU	CT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
EEO1		O due Over strip reinforced ERMO-PLASTIC RUBBER	вох	25 m	8,5 cm	63079098
ED142	GARV JOINT CO WITH RU	OVER STRIP REINFORCED	вох	20 m	10 cm	63079098
ED141	GARVI JOINT CO WITH RU	OVER STRIP REINFORCED	ВОХ	20 m	15 cm	63079098
CD01		SCUD JOIN ZED JOINT COVER BAND	вох	25 m	10 cm	63079098
CD04	ELASTICI	SCUD JOIN BT ZED JOINT COVER BAND DHESIVE BUTYL RUBBER	вох	20 m	10 cm	56031410
CODE	PRODU	ICT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
CODE	AQUA	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE	PACKAGING	CONTENT	DIMENSION	HS CODE
CODE CD05	AQUA PRE-SHA BUTYL RU	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE			DIMENSION 12x12 cm	
	AQUA PRE-SHA BUTYL RU ANGU	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JBBER	PACKAGING BOX	CONTENT 10 PCS.		HS CODE 56031410
CD05	AQUA PRE-SHA BUTYL RU ANGU ANGU GARVO	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JBBER JLAR 90°			12x12 cm	
CD05	AQUA PRE-SHA BUTYL RU ANGU GARV FELT-CO	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JBBER JLAR 90° JLAR 270° O ANGULAR	ВОХ	10 PCS.	12x12 cm	56031410
CD05	AQUA PRE-SHA BUTYL RU ANGU ANGU GARV FELT-CO ANGU	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JIBBER JILAR 90° JILAR 270° O ANGULAR ATED RUBBER			12x12 cm 10,5x10,5 cm	
CD05 CD06	AQUA PRE-SHA BUTYL RU ANGU GARV FELT-CO ANGU EXHAU	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JIBBER JILAR 90° JILAR 270° O ANGULAR ATED RUBBER JILAR 90°	ВОХ	10 PCS.	12x12 cm 10,5x10,5 cm	56031410
CD05 CD06	AQUA PRE-SHA BUTYL RU ANGU ANGU GARV FELT-CO ANGU EXHAU EXHAU exhaust/	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JIBBER JILAR 90° JILAR 270° O ANGULAR ATED RUBBER JILAR 90° JILAR 270°	вох	10 PCS.	12x12 cm 10,5x10,5 cm 12x12 cm	56031410
CD05 CD06 ED144 ED145	AQUA PRE-SHA BUTYL RU ANGU GARVO FELT-CO ANGU EXHAU EXHAUST/ pipe size EXHAU Exhaust/ Exhaust/ Exhaust/	SCUD JOIN BT ANGULAR PED BAND COVER, WITH ADHESIVE JBBER JLAR 90° JLAR 270° O ANGULAR ATED RUBBER JLAR 270° JST/DRAINAGE ATED RUBBER JST/DRAINAGE PIPE Ø80 Idrainage pipe: Ø 72 mm	ВОХ	10 PCS.	12x12 cm 10,5x10,5 cm	56031410

12 It's a waterproof life.

Profiles and drainages



CODE		PRODUCT DESCRIPTION	PACKAGING CONTENT	QUANTITY	HS CODE
		AQUASCUD H.O LINE EDGING PROFILE WITH DRAINAGE size: 270x8x5,5 cm			
CF09	1	GREY COLOUR	TUBE	1 PC.	76041090
CF12	Sales Contraction of the Contrac	SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:		2,7 m	
		AQUASCUD H.10 LINE EDGING PROFILE WITH DOUBLE DRAINAGE size: 270x9x6,5 cm			
CF01	1	GREY COLOUR	TUBE	1 PC.	76042990
CF04	Sales Control	SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:		2,7 m	
CODE		PRODUCT DESCRIPTION	CONTENT	QUANTITY	HS CODE
		AQUASCUD H.O CORNER 90° CORNER PROFILE FOR AQUSCUD H.O LINE size: 21x21x5,5 cm			
CF11		GREY COLOUR	-	1 PC.	76041090
CF14		SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:			
		AQUASCUD H.0 FIXY CONJUNCTION PROFILE FOR AQUISCUD H.0 LINE			
CF10	400	GREY COLOUR	BAG	1 PC.	76041090
CF13		SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:	DAO	TTC.	70041070
		AQUASCUD H.10 CORNER 90° CORNER PROFILE FOR AQUSCUD H.10 LINE size: 21x21x6,5 cm			
CF03	Z	GREY COLOUR		1 PC.	76042990
CF06		SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:	-	TPC.	
		AQUASCUD H.10 CORNER 270° CORNER PROFILE FOR AQUSCUD H.10 LINE size: 21x21x6,5 cm			
CF07		GREY COLOUR	_	1 PC.	76041090
CF08		SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:		110.	700-1070
		AQUASCUD H.10 FIXY CONJUNCTION PROFILE FOR AQUASCUD H.10 LINE			
CF02		GREY COLOUR			
CF05		SPECIAL WHITE BROWN ANTHRACITE COR-TEN COLOURS AVAILABLE:	BAG	1 PC.	76041090

IL10

Waterproof mortars - Rapid-setting mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	BI MORTAR CONCRETE SEAL CEMENT-BASED WATERPROOFING COATING APPLICABLE BY BRUSH Suitable for both indoor and outdoor application Particularly resistant to abrasion and impact Suitable for continuous contact with water Seasy maintenance, also in conditions of high humidity and closed environments CEUNI EN 1504-2 PRINCIPI PI, MC e IR				
ILO4	BI MORTAR CONCRETE SEAL	2,5~3,0 kg/m²	BAG kg 20	1200	38245090
	BI MORTAR RASO SEAL LEVELLING FIBRE-REINFORCED WHITE COMPOUND WITH WATERPROOFING AND FINISHING FUNCTION > Good surface finish thanks to its fine grain size > Waterproof levelling compound also suitable in conditions of negative hydraulic pressure > Excellent adhesion on most types of substrates such as concrete, mortar, stone, brick > It simplifies and reduces the application phases as it evens out and water- proofs in a single application				
ILO7	BI MORTAR RASO SEAL - 20 kg powder + 5 kg liquid component A: cod. ZIL01 20 kg powder component B: cod. ZIL1 5 kg liquid	1,85 kg/m² each mm of thickness	BAG + PAIL kg 25	1500	38245090
	BI MORTAR PLASTER SEAL FIBRE-REINFORCED WATERPROOFING PLASTER It simplifies and reduces the application phases as it evens out and waterproofs in a single application Also applicable on uneven surfaces Excellent adhesion Excellent resistance to negative pressure UNI EN 1504-3 CC R3				
ILO1	BI MORTAR PLASTER SEAL	18 kg/m² each mm of thickness	BAG kg 25	1200	38245090
	BI MORTAR LEVELLING SEAL CEMENT-BASED READY-MIX, SELF-LEVELLING, POURABLE, HIGH ELASTIC MODULE > Waterproof > High mechanical resistance > Good levelling properties > High resistance anchorings C				

19 kg/m² each mm of thickness

BAG kg 25

1200

38245090

BI MORTAR LEVELING SEAL

Waterproof mortars - Rapid-setting mortars



PACKAGING CONTENT CONSUMPTION CODE **PRODUCT DESCRIPTION** kg/PALLET **HS CODE** OUTPUT BI MORTAR ULTRA SEAL THREE COMPONENTS EPOXY-CEMENT BASED WATERPROOF SKIM COAT > High adhesion on a variety of substrates > Compatible with subsequent coatings > Improves substrate preparation > Application versatility IL11 BI MORTAR ULTRA SEAL - 2,2 kg liquid + 8,2 kg liquid + 9,6 1,5 kg/m² each mm of thickness kg powder BAG + VASES 39073000 NEW component A: cod. ZZIL11_0 2,2 kg liquid component B: cod. ZZIL11_1 8,2 kg liquid KG 20 component C: cod. ZIL11 9,6 kg powd **I-PLUG** ULTRA-RAPID WATERPROOF MORTAR > Excellent waterproofing > No shrinkage > Instantaneously block water flows, even if pressurised > High mechanical resistance 10 kg yields 6 liters of mortar BAG kg 10 **I-PLUG** 800 38245090 IC186 TAP 3 WATERPROOF QUICK-SETTING HYDRAULIC MORTAR > Excellent waterproofing > Rapid-setting > No shrinkage > High mechanical resistance 5 kg yields 3 liters BOX IC181 **TAP 3** - 5 kg 600 38245090 kg 5 of mortar TAP 3 WATERPROOF QUICK-SETTING HYDRAULIC MORTAR > Excellent waterproofing > Rapid-setting > No shrinkage > High mechanical resistance 20 kg yields 12 liters PAIL **TAP 3** - 20 kg IC182 600 38245090 kg 20 of mortar SPIDY 15 WATERPROOF QUICK-SETTING MORTAR > Good finish results > High adhesion to concrete and reinforcement bars > Rapid-setting also on surfaces and in particularly damp > Excellent thixotropy that does not require the use of formwork 19 kg/m^2 BAG 15 kg FH01 SPIDY 15 1200 38245090 each cm of thickness

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
	REVOMAT FIBERGLASS MESH ALKALI RESISTANT > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability				
BEOO	REVOMAT H.100 - mesh size: 40x40 mm - lenght 30 m	ROLL	30	100 cm	70196600
NEW	REVOGRID H. 160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments				
FN04	REVOGRID H.160 - mesh size: 66x66 mm - lenght 30 m	ROLL	48	160 cm	7019660085
NEW	REVOGRID CORNER 90° CORNER OF MONOLITHIC PREFORMED GFRP MESH > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments EAD 340392-00-0104 ETA-25/0119				
FN05	REVOGRID CORNER - size: 25x25x160 cm - mesh size: 66x66 cm	WRAPPING	20 PCS.	-	7019660085
NEW	REVOGRID CONNECTOR-L GFRP L-CONNECTOR > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability EAD 340392-00-0104 ETA-25/0119				
FN06	REVOGRID CONNECTOR-L - size: Ø 6mm - size: 10x20 cm	ВОХ	100 PCS.	-	7019660085

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
***	CONNETTORI CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING Solid anchoring thanks to double disc Allows for the absence of reinforcement mesh in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them Quick and easy application thanks to the installation guide disc				
FN03	CONNETTORE 20 - size: 80 mm (20 + 60 mm)		1 PC.	-	73160000
FN02	CONNETTORE 38 - size: 185 mm (38 + 147 mm)		1 PC.	-	73160000



BI FIX 300

AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR

- > Fast, solid and resolutive anchoring
- > It can be fastened on horizontal, vertical, inclined or overhead axis > Also suitable for fixing on intact or cracked concrete supports, solid and perforated masonry, stone, wood
- > Applicable on dry, wet or flooded concrete


C € EAD 330499-01-0601 ETA-20/0352

FN01 **BI FIX 300** BOX 2 PCS. 300 35069190

NOTES		

JOINTS AND SEALANTS

JONTS AND SEALANTS

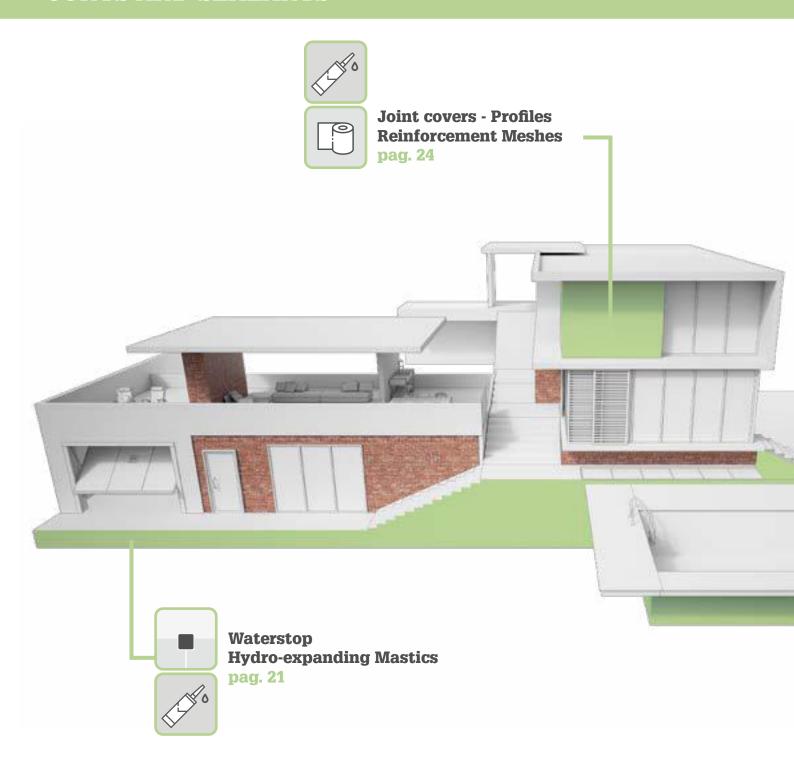

Waterstop - Hydro-expanding mastics



CODE	PRODUCT DESCRIPTION	PACKAGING	M/BOX	M/PALLET	HS CODE
	WT CONSTRUCTION EPDM HYDRO-SWELLABLE WATERSTOP REINFORCED WITH STEEL MESH > High resistance to hydraulic load > High hydro-expansive stability and crack sealing capacity > Excellent adherence to the surface > Easy and quick application by nailing CE EAD 320008-01-0605 ETA-24/0387				
BF02	WT C 20.10 - size: 20x10 mm - length 10 m Complete with progressive fixing nails	BOX 3 ROLLS	30 m	1440	40051000
BF01	WT C 25.15 - size: 25x15 mm - length 7 m Complete with progressive fixing nails	BOX 3 ROLLS	21 m	1008	40051000
	WT EXPANSION EPDM HYDRO-SWELLABLE WATERSTOP FOR JOINTS > Perfect seal of expansion joints > High resistance to hydraulic load > Easy adaptation to the size of the structure to be waterproofed in correspondence of the expansion joint				
BG01	WT E 20.20 - size: 20x20 mm - length1,2 m	9 BARS	10,80 m	-	40051000
BG02	WT E 30.30 - size: 30x30 mm - length 1,20 m	4 BARS	4,80 m	-	40051000
	WT PANEL EPDM HYDRO-SWELLABLE MODULAR WATERSTOP PANEL > High hydro-expansive stability and capacity > Easy adaptation to the size of the structures to be waterproofed in correspondence of the expansion joint > Can be hot-welded, glued, cut and adapted to the structure > Perfect seal of expansion joints and transit elements	POV.			
GE03	WT P 25 - size: mm 250x5 - lenght m 10	BOX 1ROLL	10M	300	40051000
GE04	WT P 125 - size: cm 125x5 - lenght m 1,2	BOX 20 PANEL	24 M	720	40051000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	M/PALLET	HS CODE
P	WT STRIP EPDM HYDRO-EXPANDING WATERSTOP TAPE > High hydro-expansive stability and capacity > Easy adaptation to the size of the structures to be waterproofed in correspondence of the expansion joint > Can be hot-welded, glued, cut and adapted to the structure > Perfect seal of expansion joints and transit elements				
BH01	WT STRIP 30.5 - size: 30x5 mm - lenght 15 m	BOX 5 ROLL	75 m	3600 m	40051000
BH02	WT STRIP 50.5 - size: 50x5 mm - lenght 15 m	BOX 3 ROLL	45 m	2160 m	40051000
an A	WT BREAK SELF-SEALING WATERTIGHT BOX ELEMENT DESIGNED TO CONTROL AND SEAL ANY SPONTANEOUS CRACKS THAT DEVELOP IN THE REINFORCED CONCRETE. > Perfect hydraulic water-tightness > Maximum control of shrinkage of reinforced concrete > Possibility of preparing continuous concrete castings without joints > Allows the reinforcement bars to be laid without interruptions				
BC07	WT BREAK - 50.5 size: 17,5x100 cm - thickness 2 cm	BOX	10 m	10 BARS	40051000

Waterstop - Hydro-expanding mastics





CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
	ULTRABOND POLIMER-BASED ADHESIVE MASTIC TO INSTALL/FIX ADEKA PROFILES > Solid, long-lasting adhesion with even adhesive distribution > Resistance to high temperatures, plasticisers, oils and lubricants > Effective in thermal and chemical stress applications > Versatile and easy to apply				
GC15	ULTRABOND	CAN	0,85 kg	-	39094000
uftr^hock • "	ULTRATACK SUCTION EFFECT SEALING ADHESIVE > High initial tack: provides immediate and powerful adhesion, allowing gaskets and rubber profiles to be fixed without the need for temporary supports, adhering quickly to the surface > High adhesion: provides strong and secure bonding between rubber and concrete, resisting mechanical stress and vibration > Elasticity: maintains its flexibility over time, absorbing movement and thermal expansion > Indoor and outdoor application				
BI13	ULTRATACK - includes 20 nozzles	ВОХ	20 PCS.	600 сс	3214109000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	M/PALLET	HS CODE
ST IN	WT 102 HYDRO-EXPANDING BENTONITE-BASED PROFILE, RED COLOUR COMPLETE WITH RE.VO FIXING NET + PROGRESSIVE NAILS > High resistance to hydraulic load > Easy and quick application > Excellent stability and adherence to the surface > High resistance to hydraulic load				
BD03	ML 10 - size: 25×20 mm - lenght 5 m includes: 2-roll-box + 10 m RE.VO + nails	BOX 2 ROLLS	10 m	320	40059900
BD02	ML 30 - size: 25×20 mm - lenght 5 m includes: 6-roll-box + 30 m RE.VO + nails	BOX 6 ROLLS	30 m	720	40059900
ввоо	RE.VO NET - Fixing yellow polypropilene net + nails	ВОХ	30 m	50	39023000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
	AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC > Resolutive intervention on existing structures > Also applicable on wet and very uneven surfaces > It can support significant loads of water > Practical and fast for accurate applications				

BOX

6 PCS.

310

32141010

AKTI-VO 201

GB17

Waterstop - Hydro-expanding mastics



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
	VOL-TEC RECTILINEAR ELEMENTS EXPANDING PROFILE FOR WIDE EXPANSION JOINTS The pressure of the rubber structure can be adjusted manually, with torque adjustment possible after application Easy testing and inspection of the state of efficiency of the profile Quick and safe installation, thanks to the complete kit of required elements and preparation of the area The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD01	VOL-TEC RECTILINEAR ELEMENTS size: L 290 x H 100 mm - thickness 50 mm	ВОХ	3 PCS.	-	40169300
	VOL-TEC CORNER ELEMENT EXPANDING PROFILE FOR WIDE EXPANSION JOINTS The pressure of the rubber structure can be adjusted manually, with torque adjustment possible after application Easy testing and inspection of the state of efficiency of the profile Quick and safe installation, thanks to the complete kit of required elements and preparation of the area The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD02	VOL-TEC CORNER ELEMENT size: 170 x 170 x H 100 mm - thickness 50 mm	ВОХ	1 PC.	-	40169300
	VOL-TEC - NO STANDARD NO STANDARD PIECE - EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually, with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation, thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement				
GD04	VOL-TEC - NO STANDARD	-	1 PC.	-	40169300

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
GD03	VOL-TEC - STRING HYDRO-EXPANDING RUBBER GASKET	ROLL	25 m	-	39169010
SHEET, SPECIES	VOL-TEC DIMA PRE-CAST GUIDE				
GD05	STANDARD - size: thickness 50 mm - length 1 m	ВОХ	1 PC.	-	48115900
GD06	PER STRING - size: thickness 55 mm - length 1 m	ВОХ	1 PC.	-	48115900

Joint covers - Profiles - Reinforcement meshes





CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH/cm	HS CODE
-	BI FLEX SYSTEM TPE POLYMER-BASED ELASTIC BAND > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness, which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water				
EW05	BI FLEX - H 10 - size: 0,5 mm	вох	40 m	10	39204910
EW02	BI FLEX - H 10 - size: 1,0 mm	ВОХ	20 m	10	39204910
EW08	BI FLEX - H 15 - size: 1,0 mm	ВОХ	20 m	15	39204910
EW01	BI FLEX - H 20 - size: 1,0 mm	ВОХ	20 m	20	39204910
EW04	BI FLEX - H 20 - size: 1,5 mm	BOX	15 m	20	39204910
CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
Build State	BI BOND EPOXY ADHESIVE FOR BONDING BI-FLEX > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness, which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water				
EY02	BI BOND - 5 KG (2,5 kg + 2,5 kg) component A - cod. EY12: 2,5 kg component B - cod. EY13: 2,5 kg	1,5÷1,6 kg/m² per mm thickness	5 kg PAIL + PAIL	500 + 500	39073000
EY01	BI BOND - 10 KG (5 kg + 5 kg) component A - cod. EY10: 5 kg component B - cod. EY11: 5 kg	0,6 kg/m BI FLEX H.10 0,8 kg/m BI FLEX H.15 1,0 kg/m BI FLEX H.20	10 kg PAIL + PAIL	500 + 500	39073000
00m	REPOSOL TWO-COMPONENT EPOXY RESIN FOR BONDING AND IMPREGNATION > Simple application > Versatility				



HI007

- > High performance

REPOSOL 8	KG (5 kg	+ 3	kg)
(Commonant A 5 kg				_

(Component A 5 kg + Component component A - cod. HI003: 5 kg component B - cod. HI004: 3 kg

8 kg PAIL + PAIL 39073000

Joint covers - Profiles - Reinforcement meshes



0,34 kg

CAN



35069190

CODE PRODUCT DESCRIPTION PACKAGING CONTENT cc/PACK HS CODE

TOATE =

BI MASTICDEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE

- > High thixotropy, adhesion and durability, and U.resistance
- > Hygroscopic behaviour, cross-linked with environmental humidity
- > Also applicable on damp surfaces
- > Applicable on a **wide range of surfaces**, both absorbent and non-absorbent

RB11 BI MASTIC BOX 12 PCS. 600 **32149000**

CODE PRODUCT DESCRIPTION PACKAGING CONTENT DIMENSION HS CODE

EU01


SUPERBONDADHESIVE MASTIC FOR BONDING OF RUBBER GASKETS ON CONCRETE AND JUNCTION OF JOINT COVERING BANDS with brush dispenser

NOTES	

DAMP-PROOF RESTORATION



DAMP-PROOF RESTORATION

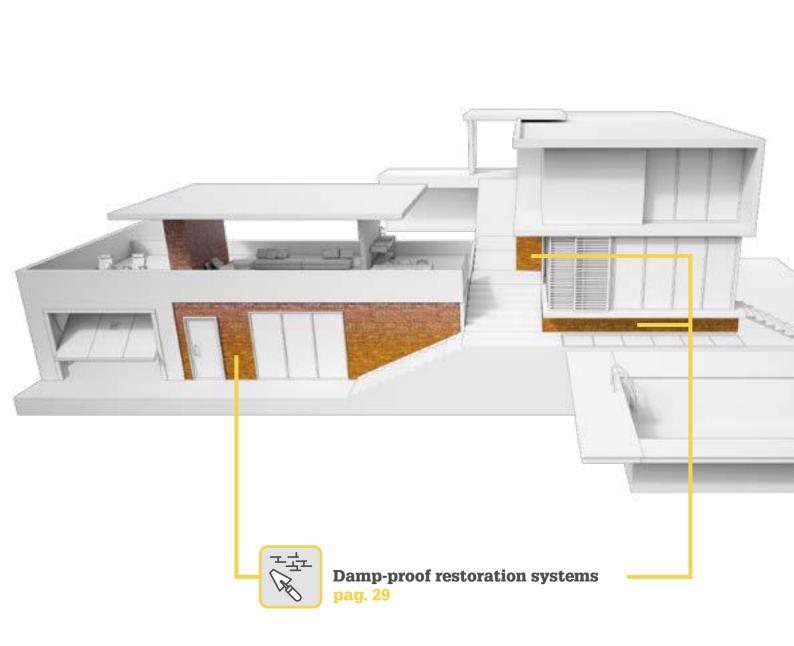

Damp-proof restoration systems



PRODUCT DESCRIPTION IBRO RINZAFFO DY-MIX SALT-PROOF RENDER table to coat all types of walls uarantees long-lasting sound and stable restoration shibits the development of any form of condensation so machine-applicable	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
OY-MIX SALT-PROOF RENDER table to coat all types of walls uarantees long-lasting sound and stable restoration whibits the development of any form of condensation				
IBRO RINZAFFO	6~6,5 kg/m² each 0,5 cm of thickness	BAG kg 25	1200	38245090
IBRO P.E. INTONACO DY-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSA- I-PROOF table to coat all types of walls uarantees long-lasting sound and stable restoration shibits the development of any form of condensation so machine-applicable				
UNI EN 998-1				
IBRO P.E. INTONACO	9~9,5 kg/m² each cm of thickness	BAG kg 20	1200	38245090
IBRO NHL DY-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 P-PROOF, SALT-PROOF, CONDENSATION-PROOF tural lime-based product, NHL according to EN 459 compatible 1 1: Rinzaffo and Intonaco in a single solution o machine-applicable				
UNI EN 998-1 EPD 0298				
IBRO NHL	10,5~11 kg/m² each cm of thickness	BAG kg 20	1200	38245090
	Y-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSA-PROOF able to coat all types of walls varantees long-lasting sound and stable restoration nibits the development of any form of condensation or machine-applicable UNI EN 998-1 BRO P.E. INTONACO BRO NHL Y-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 P-PROOF, SALT-PROOF, CONDENSATION-PROOF ural lime-based product, NHL according to EN 459 compatible 1: Rinzaffo and Intonaco in a single solution or machine-applicable EPD 0298 UNI EN 998-1	Y-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSA-PROOF able to coat all types of walls parantees long-lasting sound and stable restoration hibits the development of any form of condensation o machine-applicable UNI EN 998-1 BRO P.E. INTONACO 9~9,5 kg/m² each cm of thickness BRO NHL Y-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 P-PROOF, SALT-PROOF, CONDENSATION-PROOF ural lime-based product, NHL according to EN 459 compatible 1: Rinzaffo and Intonaco in a single solution o machine-applicable UNI EN 998-1 EPD 0298 UNI EN 998-1 EPD 0298 BRO NHL 10,5~11 kg/m² each cm of thickness	AY-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSA-PROOF able to coat all types of walls tarantees long-lasting sound and stable restoration hibits the development of any form of condensation or machine-applicable UNI EN 998-1 BRO P.E. INTONACO 9~9,5 kg/m² each cm of thickness BAG kg 20 BRO NHL Y-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 P-PROOF, SALT-PROOF, CONDENSATION-PROOF ural lime-based product, NHL according to EN 459 compatible 1: Rinzaffo and Intonaco in a single solution or machine-applicable UNI EN 998-1 EPD 0298 UNI EN 998-1 BRO NHL 10,5~11 kg/m² each cm of thickness BAG kg 20	AME AME AME AME AME AME AME AME



- Easy workability on existing and newly-built surfaces
 Excellent finish results, even in the presence of micro-cracks and old paint
- > Compatibility with **old walls**

C € UNI EN 998-1

1,4 kg/m² each mm of thickness BAG kg 20 FM001 X-LIME 1200 38245090

Damp-proof restoration systems



CONSUMPTION OUTPUT PACKAGING CONTENT HS CODE CODE PRODUCT DESCRIPTION



SUPER-HYDROPHOBIC ANTI-HUMIDITY CREAMY EMULSION FOR INJECTION.

- > Ready to use and easy application for injection
- > Suitable for both indoor and outdoor application
- > Effective and long-lasting water resistant protection
- > Odourless and solvent-free




HL001	TRIPLEZERO - 600 cc	10 cc x 1 cm of wall thickness x 1 m of wall lenght	BOX 10 PCS.	cc 600/PACK	39100000
HL004	TRIPLEZERO - 15 kg	10 cc x 1 cm of wall thickness x 1 m of wall lenght	VASE 15 kg	-	39100000

RECOVERY AND PROTECTION



RECOVERY AND PROTECTION

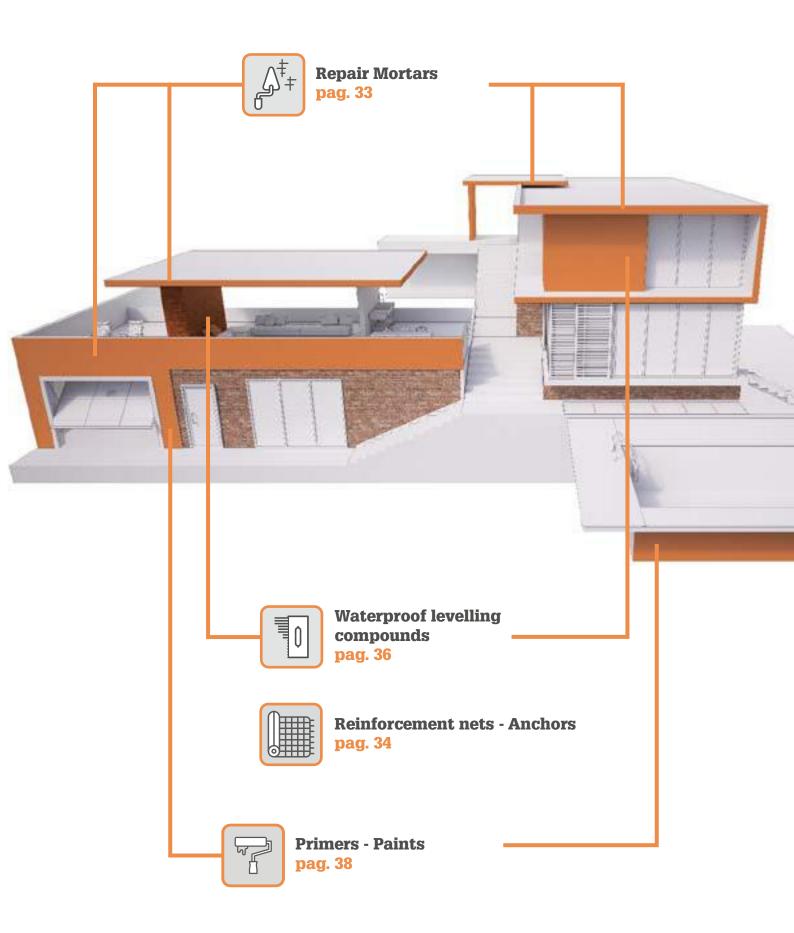

It's a waterproof life.

Repair Mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
SANCER	SANOFER POLYMERS AND CEMENT-BASED PROTECTIVE COATING FOR ARMOR IRONS Also effective on rust-corroded rods Excellent grip for future repair mortars Easy and quick application Use directly on exposed steel bars UNI EN 1504-7				
FB25	SANOFER	30 g/m bars ø 8 mm 60 g/m bars ø 16 mm	VASE 1 kg	150	38245090
13	FIBROMIX 40 CEMENT-BASED READY-MIX, FIBRE-REINFORCED, MEDIUM ELASTIC MODULE > High impermeability > Good resistance against the aggression of atmospheric chemical agents > Excellent adhesion to concrete and reinforcement bars > Light colour C E UNI EN 1504-3 CC R4				
FA262	FIBROMIX 40	18 kg/m² for each cm of thickness	BAG 25 kg	1200	38245090
RASO	FIBROERASO SEMI-RAPID THIXOTROPIC MORTAR WITH MEDIUM MODULUS ELASTICITY AND CONTROLLED SHRINKAGE > High impermeability > Easy workability and rapid application > High resistance to carbonation > Excellent adhesion to concrete and reinforcement bars				
	UNI EN 1504-2 PRINCIPI MC e IR				
FA264	FIBROeRASO	17,5 kg/m² for each cm of thickness	BAG 20 kg	1200	38245090



FLEXOMIX 30

CEMENT-BASED READY-MIX, LOW ELASTIC MODULE

- > High impermeability
 > Good resist ance against the aggression of atmospheric chemical
- > Low modulus of elasticity that is capable of following the movements
- > Excellent thixotropy that allows the product to be applied without formwork

C € UNI EN 1504-3 PCC R3

FF26	FLEXOMIX 30	16 kg/m² for each cm of thickness	BAG kg 25	1200	38245090
------	-------------	---	--------------	------	----------

Repair Mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	FIBRO HFR THREE-COMPONENT FLOWABLE REPAIR MORTAR REINFORCED WITH STEEL FIBERS > The presence of the steel fibre gives it its firm behaviour > Applicable in thicknesses between 1 and 10 cm > Total resistance to carbonation phenomena > Very high mechanical compression and flexural strength EPD 0298 EPD 0298				
FI03	FIBRO HFR - COMPONENT A - POWDER	051	BAG 25 kg	1200	38245090
FIO4	FIBRO HFR - COMPONENT B - LIQUID	25 kg (A + B + C) per cm	VASE 14 kg	616	2909430000
FI05	STEEL FIBERS - COMPONENT C - STEELS	thickness	вох	-	83089000

MIXING RATIO 100 KG POWDER + 14 kg LIQUID + 5 kg FIBERS

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
	REVOMAT FIBERGLASS MESH ALKALI RESISTANT > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability				
BE00	REVOMAT H.100 - mesh size: 40x40 mm - lenght 30 m	ROLL	30	100 cm	70196600
	REVOGRID H.160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH > High mechanical strength: ensures long-lasting, high-performance reinforcement				



- > Lightweight and easy to install: simplifies installation and reduces work times
- > Compatibility with traditional materials: excellent adhesion with common mortar and masonry
- > Chemical resistance: resistant to weathering and aggressive environments

€ EAD 340392-00-0104 ETA-25/0119

FN04 REVOGRID H.160 - mesh size: 66x66 mm - lenght 30 m ROLL 48 160 cm 7019660085

Reinforcement nets - Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
NEW	REVOGRID CORNER 90° CORNER OF MONOLITHIC PREFORMED GFRP MESH > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments EAD 340392-00-0104 ETA-25/0119				
FN05	REVOGRID CORNER - size: 25x25x160 cm - mesh size: 66x66 cm	WRAPPING	20 PCS.	-	7019660085
NEW	REVOGRID CONNECTOR-L GFRP L-CONNECTOR > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability EAD 340392-00-0104 ETA-25/0119				
FN06	REVOGRID CONNECTOR-L - size: Ø 6mm - size: 10x20 cm	ВОХ	100 PCS.	-	7019660085
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
X	CONNETTORI CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING Solid anchoring thanks to double disc Allows for the absence of reinforcement mesh in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them Quick and easy application thanks to the installation guide disc				
FN03	CONNETTORE 20 - size: 80 mm (20 + 60 mm)		1 PC.	-	73160000
FN02	CONNETTORE 38 - size: 185 mm (38 + 147 mm)		1 PC.	-	73160000
SELY.	BI FIX 300 AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR > Fast, solid and resolutive anchoring > It can be fastened on horizontal, vertical, inclined or overhead axis > Also suitable for fixing on intact or cracked concrete supports, solid and perforated masonry, stone, wood > Applicable on dry, wet or flooded concrete CE EAD 330499-01-0601 ETA-20/0352				
FN01	BI FIX 300	вох	2 PCS.	600	32141010

Waterproof levelling compounds



Waterproof levelling compounds					Ľ
CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
XLIME	X-LIME LIME-BASED PLASTER FINISHING, WHITE COLOUR > High breathability > Easy workability on existing and newly-built surfaces > Excellent finish results, even in the presence of micro-cracks and old paint > Compatibility with old walls				
FM001	X-LIME	1,4 kg/m² each mm of thickness	BAG kg 20	1200	38245090
	CP1 WATERPROOFING, ELASTIC, HIGHLY BREATHABLE MINERAL COATING TWO-COMPONENT IN WHITE COLOUR > Breathability and elasticity all in one solution > Extremely effective anti-carbonation barrier to protect the concrete > High protection that extends the service life of the structure > Resistant to the formation and proliferation of fungi, algae and mould CE UNI EN 1504-2 PRINCIPI MC e IR				
ERO1	CP1 (15 kg powder + 5,7 kg liquid) component A: cod. ZR001 - 15 kg powder component B: cod. ZZZR1 - 5,7 kg liquid	2,5 kg output a thickness of 2 mm/m ²	BAG + VASE 20,7 kg	1656	38245090
CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	GRANULOME- TRY	kg/PALLET	HS CODE
(29)	CPØ ACRYL-SILOSSANIC READY-TO-USE PIGMENTED COATING HIGHLY BREATHABLE, ELASTIC AND WATER-REPELLENT FOR INDOOR AND OUTDOOR USE Fine aesthetic appearance, available in different sizes Compact effect, excellent filling and covering capability Resistant to the formation and proliferation of mould, algae and fungi Long-lasting thanks to high resistance to atmospheric agents and UV rays UNI EN 15824				
	0,4 mm				
ER05A	CPØ (color group A)	1,6 - 1.8	0.4	VASE	22000000
ERO5B	CPØ (color group B)	1,6 - 1,8 kg/m²	0,4 mm	25 kg	32099000

ER05A		0,4 mm CPØ (color group A)	1 (10			
ERO5B	60	CPØ (color group B)	1,6 - 1,8 kg/m²	0,4 mm	VASE 25 kg	32099000
		1,0 mm				
ER03A	eg.	CPØ (color group A)	1,8 - 2 kg/m²	1,0 mm	VASE	32099000
ERO3B		CPØ (color group B)	kg/m²	1,0 111111	25 kg	32077000
		1,2 mm				
ER02A	*e.s	CPØ (color group A)	2 - 2,2 kg/m²	1,2 mm	VASE	32099000
ERO2B		CPØ (color group B)	kg/m²	.,	25 kg	
		1,5 mm				
ERO4A	-ea	CPØ (color group A)	2,2 - 2,5 kg/m²	1,5 mm	VASE	32099000
FRO4B		CPØ (color group B)	kg/m ²	. / •	25 kg	

Waterproof levelling compounds



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
E B	TRIPLEZERO - T SUPERHYDROFOBIC DAMP-PROOFING CREAMY EMULSION APPLICABLE BY ROLLER/BRUSH/AIRLESS > Suitable for both indoor and outdoor application > Effective and long-lasting transparent protection > Excellent resistance against ageing agents such as UV rays, un/freezing, marine aerosol				
HL002	TRIPLEZERO - T 5 kg	100~400 g/m²	VASE kg 5	-	39100000
HL005	TRIPLEZERO - T 15 kg	100~400 g/m²	VASE kg 15	-	39100000

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	WIDTH	LENGHT	HS CODE
	XNET MULTIDIRECTIONAL SYNTHETIC COMPOSITE ELASTICIZED NET				
ET07	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	56031290
ET06	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	56031290
ETO5	H.100 - size: 50x1 m	ROLL	100 cm	50 m	56031290
	FLEXONET ELASTIC POLYPROPYLENE REINFORCING NET				
ET03	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	60053500
ET02	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	60053500
ETO1	H.100 - size: 50x1 m	ROLL	100 cm	50 m	60053500

Primers - Paints



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE



PROCLEAN

DISINFECTANT AND ANTIMYCOTIC TREATMENT

- > It disinfects contaminated surfaces
- > It does not require dilution with water
- > Not film-forming
- Can be applied in closed and poorly ventilated environments as it is solvent-free

EC254	PROCLEAN - 5 ℓ	0,15	CAN 5 l	-	39069090
EC255	PROCLEAN - 20 ℓ	ℓ/m²	CAN 20 &	-	39069090



PROFIX 20

POLI-SILOSSANIC AND ACRILIC PRIMING TREATMENT TO CONSOLIDATE AND REGULARIZE THE ABSORPTION OF SUBSTRATES, MOSTLY CONCRETE-BASED

- > To strengthen the surface, preventing the formation of a superficial film
- > Removes dust from mineral surfaces
- > Increases the adhesion of levelling compounds, coatings or finishes in general
- > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free

EC253 PROFIX 20 - 5 ℓ 0,2÷0,3 CAN - 39069090 ℓ/m^2 5 ℓ



PROFIX 30

PRIMING TREATMENT TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES

- > High penetrating power and effective strengthening effect, even with low-porous surfaces
- > Removes dust from mineral surfaces
- > It increases adhesion of coatings, finishes and waterproofing products to the surface
- > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free

EN01	PROFIX 30 - 5 ℓ	0,2÷0,3	CAN 5 l	-	39069090
EN02	PROFIX 30 - 25 ℓ	ℓ/m²	CAN 25 ℓ	-	39069090

Primers - Paints

PAINT PROTECTION (color group B)

EG24B



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
ProEx40	PROFIX 40 COLOURED PRIMER FOR CPO CONSUMPTION, TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES > Good water resistance and vapour permeability > Good coating capacity > It increases the adhesion of CPO, PAINT AIR and PAINT PROTECTION > Can be applied in closed and poorly ventilated environments as it is solvent-free				
	5 LITERS				
EN05	PROFIX 40 (colors group A)		VASE		39069090
EN06	PROFIX 40 (colors group B)	0,15÷0,3	5ℓ	-	39069090
	14 LITERS	ℓ/m²			
EN03	PROFIX 40 (colors group A)		VASE 14 ℓ		20040000
EN04	PROFIX 40 (colors group B)			-	39069090
	 Excellent water repellency Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) Highly resistant to UV rays Vast range of colours available 				
ES01A	PAINT AIR (color group A)	0,3	VASE	-	32091000
ESO1B	PAINT AIR (color group B)	ℓ/m²	14 ℓ	-	32091000
PO	PAINT PROTECTION WATERPROOF STYROL-ACRYLIC PAINT, RESISTANT TO ATMOSPHERIC AGENTS, ANTI-CARBONATION AND EXCELLENT PERMEABILITY TO VAPOUR > Extremely effective anti-carbonation barrier to protect the concrete > Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) > Highly resistant to UV rays > Vast range of colours available UNI EN 1504-2				
EG24A	PAINT PROTECTION (color group A)	0.4		-	32091000
		0,4 ℓ/m²	VASE 14 ℓ		

32091000

Primers - Paints



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	-	HS CODE
12	CRYSTAL POOL SINGLE-COMPONENT, SATIN-EFFECT, ACRYLIC RESIN BASED, WATER-DISPERSED, SOLVENT-FREE PAINTAVAILABLE IN WHITE, SAND AND BLUE Excellent water resistance even with chlorine and chemical agents Suitable for contact with drinking water Great resistance to UV radiation Solvent-free				
EQ16	CRYSTAL POOL WHITE				
EQ17	CRYSTAL POOL SAND	0,32 - 0,40 ℓ/m²	VASE 4 ℓ	-	32099000
EQ18	CRYSTAL POOL BLUE				
EQ11	CRYSTAL POOL WHITE				
EQ12	CRYSTAL POOL SAND	0,32 - 0,40 ℓ/m²	VASE 14ℓ	-	32099000
EQ13	CRYSTAL POOL BLUE				
EQ14	CRYSTAL POOL (color group A) MINIMUM SUPPLY 28 &	0,32 - 0,40	VASE 14 ℓ	-	32099000
EQ15	CRYSTAL POOL (color group B) MINIMUM SUPPLY 28 &	ℓ/m^2			
0	CRYSTAL ONE-COMPONENT, TRANSPARENT, OPAQUE, ACRYLIC RESIN BASED, SOLVENT-FREE PAINT > Stable under UV rays and resistant to yellowing > Reduces absorption of water, oil and liquids in general > Colourless (darkening in the surface might occur) > Improves wear resistance				
EQ19	CRYSTAL - 3 &	0.20 0.24	VASE 3 ℓ		32099000
EQ20	CRYSTAL - 14 ℓ	0,30 - 0,34 l/m²	VASE 14 ℓ	-	
GOV H	CRYSTAL PURE TWO COMPONENTS WATERPROOFING WHITE EPOXY COATING SUITABLE FOR PERMANENT CONTACT WITH DRINKABLE WATER > White colour > Suistable for drinkable water	÷300 g/m²	12,84 kg		39073000
EQ21	CRYSTAL PURE (8,3 kg + 4,5 kg) component A: base 8,3 kg component B: reagent 4,54 kg				

Work tools

CODE	PRODUCT DESCRIPTION	CONTENT	HS CODE
HGII3	BRUSH	SINGLE PIECE	82055910
HGII10	SPIKE ROLLER - 7 kg FOR THE APPLICATION OF AQUASCUD BASIC, PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
HGII6	SPIKE ROLLER - REPLACEMENT	SINGLE PIECE	960340900
HGII15	SERRATED METAL SQUEEGEE PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	82055910
HGII16	SERRATED TROWEL 3,5 mm FOR THE APPLICATION OF AQUASCUD	SINGLE PIECE	82055910
HGII17	ROUND TROWEL FOR THE APPLICATION OF CP, X-LIME, AQUASCUD	SINGLE PIECE	82055910
HGII18	SERRATED TROWEL 2 mm	SINGLE PIECE	82055910
EPO1	PLASTIVO ROLLER PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
EP02	PLASTIVO ROLLER - REPLACEMENT	SINGLE PIECE	960340900

CODE		PRODUCT DESCRIPTION	PACKAGING	CONTENT	HS CODE
HL003	*	UNIPACK GUN MANUAL SEALING GUN FOR UNIPACK, COMPLETE WITH TRIPLEZERO NOZZLE, INJECTION TUBE, BI MASTIC NOZZLE, AKTI-VO BS NOZZLE	-	SINGLE PIECE	82055980
HL006	CF	KIT TRIPLEZERO COMPLETED WITH INJECTION TUBE OF 1 MM	BAG	5 PCS.	82055980
HL008	K	AKTI-VO BS KIT	BAG	5 PCS.	82055980
HL009	1	KIT BI FIX	BAG	3 PCS.	82055980
HL010	141	BI MASTIC KIT	BAG	5 PCS.	82055980
HL011		SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL012	-	GASKET SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL013		NOZZLE HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980

The company

Established in 1976, after forty-five years of activity, **Volteco** is today a provider of waterproofing solutions for the construction industry. **Volteco** works with passion and commitment on both national and international fields, for companies, through a network of distributors and applicators, cooperating with designers. Choosing **Volteco** means preventing, or solving, the problems caused by water.

Volteco solutions are in fact designed to meet specific needs based on different field of applications:

- Waterproofing of basements;
- Waterproofing of pools and tanks;
- Waterproofing of terraces and flat roofs;
- Treatment of damp walls;
- Facade restoration.

Thanks to a complete service consisting in technical expertise, professional approach and a trained and constantly updated installation network, **Volteco** offers personalized advice at every stage of the construction process. **Volteco** is a specialist in his field, the Specialist of Waterproofing!



WHAT CAN WE OFFER?



PREMIUM WATERPROOFING PRODUCTS



MORE THAN 2300 CASE HISTORIES



PROJECTS IN MORE THAN 40 COUNTRIES



MORE THAN 300 QUALIFIED INSTALLERS

Volteco's Services at your disposal

> Services for the designer



> Support for professionals and installers



> Qualified installers



More than 2.200 references: > www.volteco.com



AT | D | 03 | 00 | - | 06/2025 | EN



VOLTECO WATERPROOF TECHNOLOGY

VOLTECO S.p.A. Via delle Industrie, 47 31050 Ponzano Veneto (TV) Italy tel. +39 0422 9663 - fax +39 0422 966401 volteco@volteco.if www.volteco.com









