Field
Type of work
Boundary conditions
Construction
Excavation type
Type of material(s)
Sequence of installation
Level of risk

Underground waterproofing Reinforced concrete Aquifer

New Free HYDRO-REACTIVE SYSTEM

Before pouring concrete

High
Waterproofing barrier



1. AMPHIBIA 3000 GRIP

3. WT 102

5. Sloped screed


Type of protection

7. AQUASCUD SYSTEM 420

9. Concrete protective screed

11. Rigid insulation panels or non-woven textile (min 250 g/m²)

- 2. RC foundation wall suitable to withstand hydraulic pressures and exempt from defects
- 4. RC slab roof
- 6. BI FLEX SYSTEM
- 8. Element for protection and separation
- 10. Suitable drainage system
- 12. Well compacted soil without voids

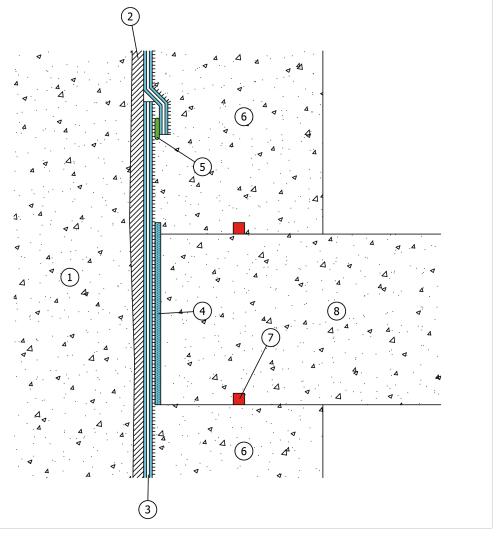

PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMS, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo. Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO All structures have to be suitable to withstand all future loads