Metal sheet piles with AMPHIBIA - Plan view - Horizontal section

Field Type of work **Boundary conditions** Construction **Excavation type** Type of material(s) Sequence of installation Level of risk

Type of protection

Underground waterproofing Reinforced concrete

Aquifer New Free

HYDRO-REACTIVE SYSTEM


Before pouring concrete

High

Waterproofing barrier



- 1. Soil
- 3. AMPHIBIA 3000 GRIP
- 5. Overlap sealed with nail gun
- 7. RC structure suitable to withstand hydraulic pressures and exempt from defects
- 2. Metal sheet piles
- 4. Connectors sealed with AKTI-VO 201 (optionals)
- 6. BI MASTIC

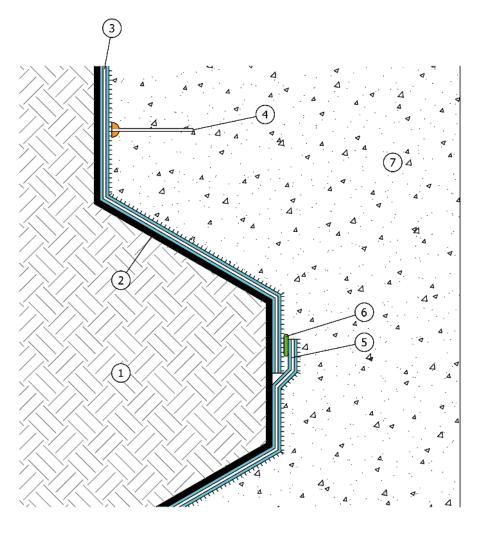

(*) or double JOINT PANEL Type R glued/fixed (on Amphibia) and with their adjacent edges sealed with BI MASTIC / AKTI-VO 201
PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMs, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo. Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO
All structures have to be suitable to withstand all future loads