Micropiles with AMPHIBIA - Horizontal section

Field Type of work Boundary conditions Construction Excavation type Type of material(s) Sequence of installation Level of risk Type of protection Underground waterproofing Reinforced concrete Aquifer New Free HYDRO-REACTIVE SYSTEM Before pouring concrete High Waterproofing barrier


1. Soil

3. Smoothing or non-degradable rigid panel

5. Connectors sealed with AKTI-VO 201

7. RC structure suitable to withstand hydraulic pressures and exempt from defects

2. Micropiles 4. AMPHIBIA 3000 GRIP 6. BI MASTIC

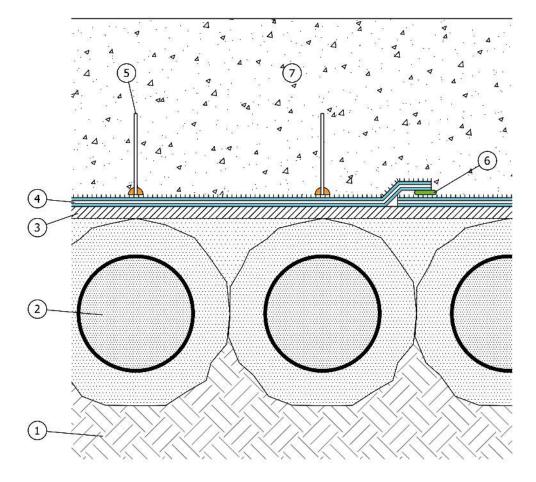

PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMs, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo. Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be suitable to withstand every kind of load that they will undergo. All structures have to be suitable to withstand all future loads



