## RC raft foundation with AMPHIBIA - Horizontal expansion joint

Field
Type of work
Boundary conditions
Construction
Excavation type
Type of material(s)
Sequence of installation
Level of risk

Underground waterproofing Reinforced concrete Aquifer New Confined

HYDRO-REACTIVE SYSTEM Before pouring concrete

Hiah

Waterproofing barrier




- 1. Soil
- 3. AMPHIBIA 3000 GRIP
- 5. RC raft foundation suitable to withstand hydraulic pressures and exempt from defects
- 7. ADEKA KM 20.20

Type of protection

9. AKTI-VO 201

- 2. Lean concrete
- 4. Concrete protective screed (optional)
- 6. JOINT PANEL Type R (max 2 panels)
- 8. Separating element (max. thickness 13 mm)
- 10. RC ramp suitable to withstand hydraulic pressures and exempt from defects

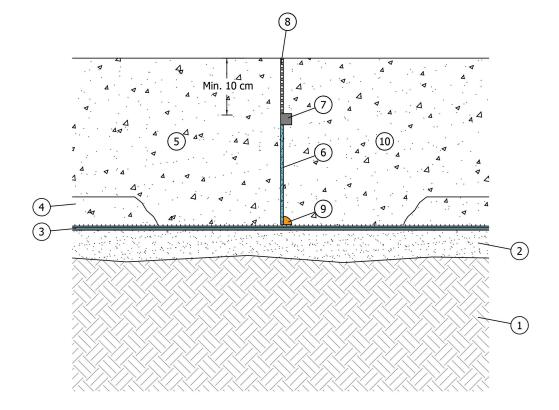

PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMS, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo. Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO All structures have to be suitable to withstand all future loads

1/1