RC raft foundation with AMPHIBIA - expansion joint with WT EXPANSION

Field
Type of work
Boundary conditions
Construction
Excavation type
Type of material(s)
Sequence of installation
Level of risk

Reinforced concrete
Aquifer
New
Confined
HYDRO-REACTIVE SYSTEM
Before pouring concrete
High

Underground waterproofing



1. AMPHIBIA 3000 GRIP

Type of protection

3. WT

5. AKTI-VO 201


7. Separating element

9. Rigid insulation panels or non-woven textile (min 250 g/m²)

- 2. RC raft foundation suitable to withstand hydraulic pressures and exempt from defects
- 4. WT EXPANSION

Waterproofing barrier

- 6. WT PANEL
- 8. RC wall suitable to withstand hydraulic pressures and exempt from defects
- 10. Well compacted soil without voids

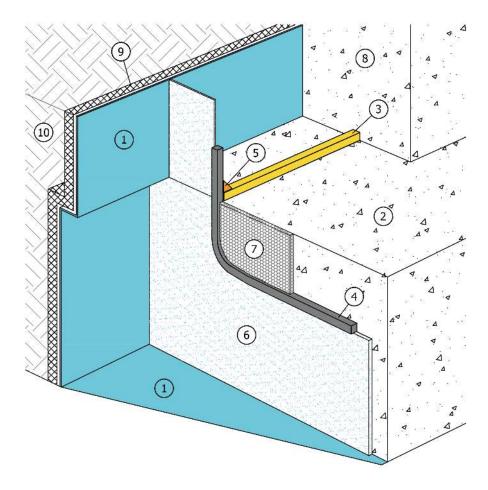

PLEASE NOTE: Do not make Amphibia overlaps around the construction joint areas.
PLEASE NOTE: The waterproofing systems must be installed continuously all along the whole structure subjected to intervention and up till the ground level, keeping the continuity between all waterproofed syntaces, horizontal and vertical; any kind of joint, penetration and every possible crack must be sealed with suitable VOLTECO systems, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage.
The structures must be suitable to withstand hydraulic pressures and every kind of load that they will undergo.



This proposed scheme (out of scale and released only for example purposes) and its implementation must be assessed and approved by the Designer and the Construction Supervisor in relation to the specific issues of the project and the building site. More information about the application, performances and technical data of the technologies that we have here described must be obtained from the product datasheets (also freely downloadable from the website www.volteco.it); those datasheets are considered part of this document.