RC walls with AMPHIBIA - Vertical expansion joint with PVC waterstop - Horizontal section

Field
Type of work
Boundary conditions
Construction
Excavation type
Type of material(s)
Sequence of installation

Reinforced concrete
Aquifer
New
Confined
HYDRO-REACTIVE SYSTEM
Before pouring concrete
High
Waterproofing barrier

Underground waterproofing



1. Well compacted soil without voids

3. AMPHIBIA 3000 GRIP


5. PVC waterstop

Type of protection

7. AKTI-VO 201

Level of risk

- 2. Rigid insulation panel or non-woven textile (min 250 g/m²)
- 4. JOINT PANEL Type R (multiples)
- 6. Separating element
- 8. RC structure suitable to withstand hydraulic pressures and exempt from defects

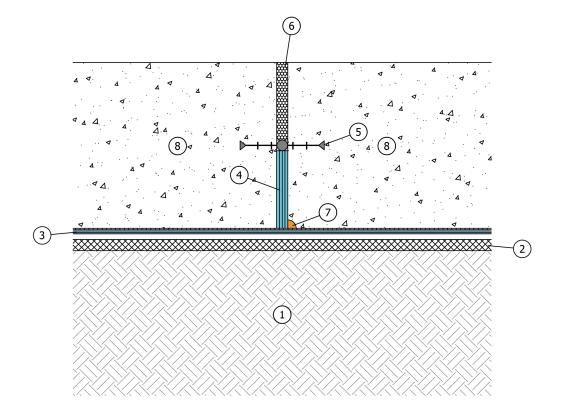

PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMs must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMS, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo. Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO All structures have to be suitable to withstand all future loads