


# RC RAFT FOUNDATION WITH AMPHIBIA - SEALING OF INTERNAL 90° CORNER ON FORMWORKS

<b>Field</b>	Underground waterproofing
<b>Type of work</b>	Reinforced concrete
<b>Boundary conditions</b>	Aquifer
<b>Construction</b>	New
<b>Excavation type</b>	Confined
<b>Type of material(s)</b>	HYDRO-REACTIVE SYSTEM
<b>Sequence of installation</b>	Before pouring concrete
<b>Level of risk</b>	High
<b>Type of protection</b>	Waterproofing barrier

1. Soil
2. Lean concrete
3. Formwork
4. AMPHIBIA 3000 GRIP H.90 vertically installed all along the formworks and folded on the raft foundation
5. AMPHIBIA 3000 GRIP H.90 flap over the formwork
6. AMPHIBIA 3000 GRIP H.180 on lean concrete
7. AMPHIBIA SAFETY TAPE or BI MASTIC
8. Apply staples to fix vertically the sheets on the formworks and BI MASTIC
9. AKTI-VO 201

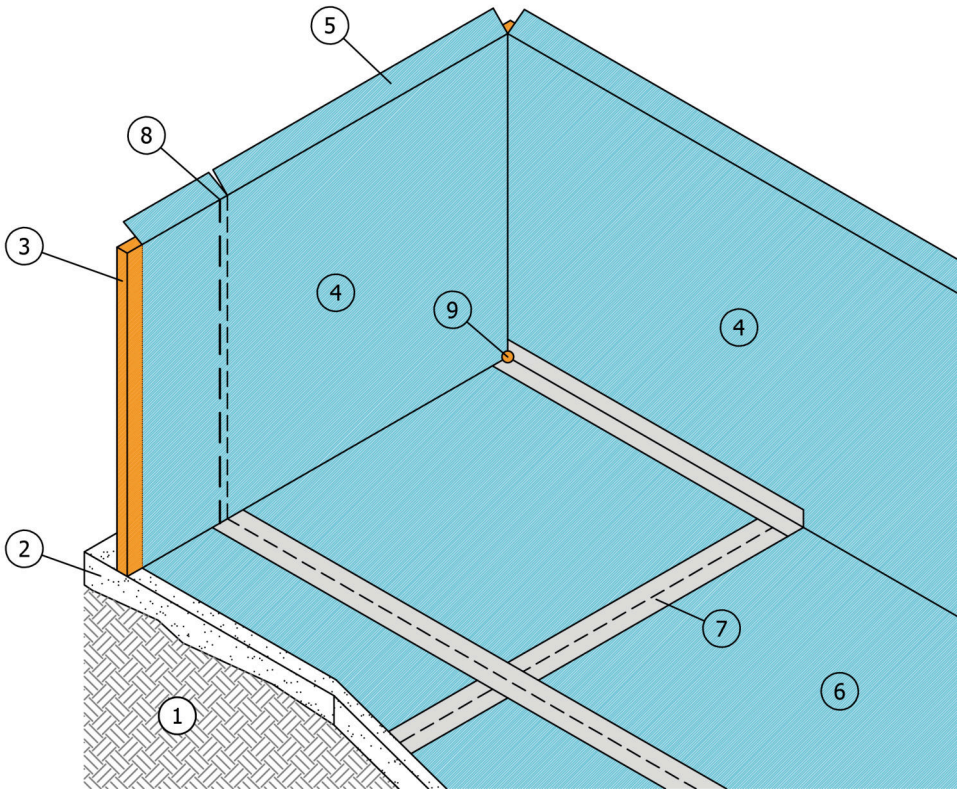

PLEASE NOTE: Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO. The waterproofing SYSTEMS must be installed continuously all along the whole structure subjected to intervention, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint (e.g. dilatation joints on the screeds, structural joints etc.), penetration, corner and every possible crack must be sealed with suitable VOLTECO SYSTEMS, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage. The structures must be suitable to withstand every kind of load that they will undergo.

Dilatation joints must be realized on the screeds, having position and length according to the Designer's specifics, and sealed with GARVO

All structures have to be suitable to withstand all future loads

This proposed scheme (out of scale and released only for example purposes) and its implementation must be assessed and approved by the Designer and the Construction Supervisor in relation to the specific issues of the project and the building site. More information about the application, performances and technical data of the technologies that we have here described must be obtained from the product datasheets (also freely downloadable from the website [www.volteco.it](http://www.volteco.it)); those datasheets are considered part of this document.