





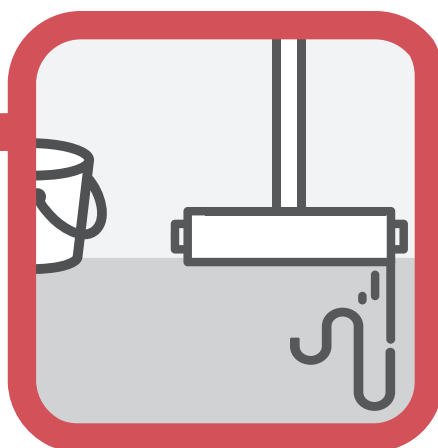




PRODUCT CATALOGUE

THE WATERPROOF TECHNOLOGY







Categories

WATERPROOFING

-  Synthetic hydro-reactive membranes **pag. 7**
-  Bentonite hydro-reactive membranes **pag. 9**
-  Flexible liquid systems **pag. 11**
-  Joint covers and accessories **pag. 13**
-  Profiles and drainages **pag. 14**
-  Waterproof mortars - Rapid-setting mortars **pag. 15**
-  Reinforcement nets - Anchors **pag. 17**





JOINTS AND SEALANTS

-   Waterstops - Hydro-expanding mastics **pag. 21**
-   Joint cover and accessories **pag. 24**

DAMP-PROOF RENOVATION

-  Damp-proof restoration systems **pag. 27**

REPAIR AND PROTECTION

-  Repair mortars **pag. 31**
-  Reinforcement nets - Anchors **pag. 32**
-  Waterproof levelling compounds **pag. 34**
-  Primers - Paints - Resins **pag. 36**

WORK TOOLS

pg. 39

Product index

AKTI-VO 201	pag. 8-22	GARVO CORNER	pag. 13
AKTI-VO BS	pag. 10	GRIPPER	pag. 12
AMPHIBIA 3000 GRIP	pag. 7	I-PLUG	pag. 16
AMPHIBIA ACCESSORIES	pag. 8	PAINT AIR	pag. 37
AQUASCUD SYSTEM 420	pag. 11	PAINT PROTECTION	pag. 37
AQUASCUD SYSTEM 430	pag. 11	PLASTIVO 180	pag. 11
AQUASCUD BASIC	pag. 12	PLASTIVO 250	pag. 11
AQUASCUD LINE	pag. 13	PROCLEAN	pag. 36
AQUASCUD REFLEX	pag. 11	PROFIX 20	pag. 36
AQUASCUD 501	pag. 12	PROFIX 30	pag. 36
AQUASCUD JOIN	pag. 12	PROFIX 40	pag. 36
AQUASCUD JOIN BT	pag. 13	PROFIX 50	pag. 37
AQUASCUD EXHAUST/DRAINAGE	pag. 12	REVOGRID	pag. 17-32
BI FIX 300	pag. 18-33	REVOGRID CORNER	pag. 17-32
BI FLEX SYSTEM	pag. 24	REVOGRID CONNECTOR-L	pag. 17-32
BI BOND	pag. 24	REVOMAT	pag. 17-32
BI MASTIC	pag. 8-24	SANOFER	pag. 31
BI MORTAR CONCRETE SEAL	pag. 15	SPIDY 15	pag. 16
BI MORTAR LEVELLING SEAL	pag. 15	SUPERBOND	pag. 24
BI MORTAR PLASTER SEAL	pag. 15	TAP 3	pag. 16
BI MORTAR RASO SEAL	pag. 15	TRIPLEZERO	pag. 27
BI MORTAR ULTRA SEAL	pag. 16	TRIPLEZERO - T	pag. 35
CALIBRO NHL	pag. 27	ULTRABOND	pag. 22
CALIBRO PLUS EVAPORATION INTONACO	pag. 27	ULTRATACK	pag. 22
CALIBRO RINZAFFO	pag. 27	VOLGRIP EP	pag. 9
STEEL CONNECTOR	pag. 17-32	VOLGRIP HP	pag. 9
CPI	pag. 34	VOLGRIP LH	pag. 9
CPØ	pag. 34	VOL-TEC	pag. 23
CRYSTAL	pag. 37	WT BREAK	pag. 22
CRYSTAL POOL	pag. 38	WT CONSTRUCTION	pag. 21
CRYSTAL PURE	pag. 38	WT EXPANSION	pag. 21
FIBRO HFR	pag. 31	WT PANEL	pag. 21
FIBROeRASO	pag. 31	WT STRIP	pag. 21
FIBROMIX 40	pag. 31	WT 102	pag. 22
FLEXOMIX 30	pag. 31	X-LIME	pag. 27-34
FLEXONET	pag. 35	XNET	pag. 35
GARVO	pag. 13		

CONTACT US


WE ARE AT YOUR DISPOSAL



Write us on Whatsapp
+39 335 120 9445



Contact us!
export@volteco.it



Download
digital version




WATERPROOFING




WATERPROOFING




Flexible liquid systems
pag. 11



Joint covers, reinforced nets
pag. 13



Profiles - drainages
pag. 14

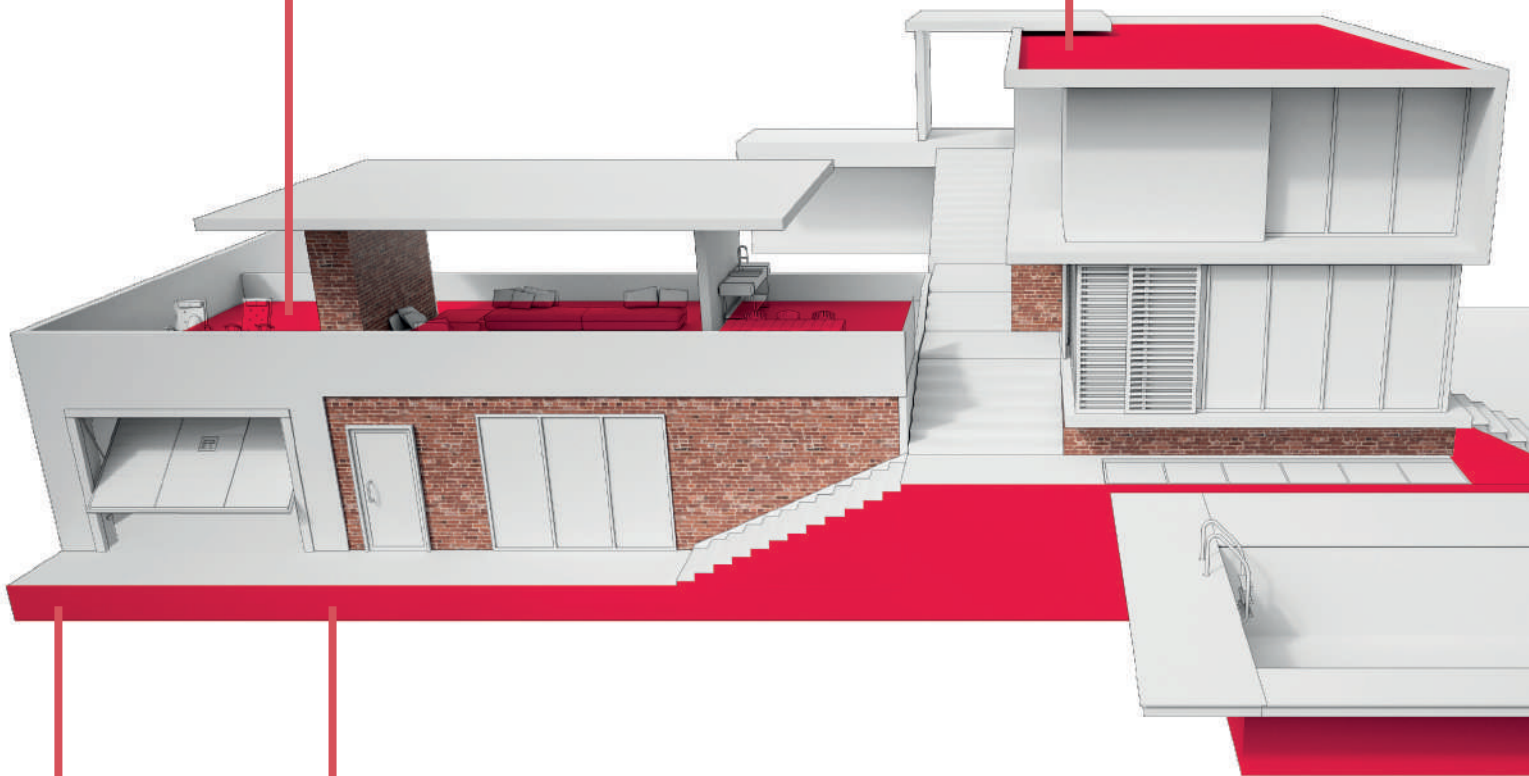

Waterproof mortars
- Rapid-setting mortars
pag. 15

















Reinforcement nets - Anchors
pag. 17




Synthetic and Bentonite
hydro-reactive membranes
pag. 7



Synthetic hydro-reactive membranes





CODE	PRODUCT DESCRIPTION	m ² /ROLL	N. OF ROLLS FOR PALLET	m ² /PALLET	HS CODE
	 <p>AMPHIBIA 3000 GRIP HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE</p> <ul style="list-style-type: none"> > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks <p>  UNI EN 13967  BBA - (N° 20/5771)   EPD 0299   </p>				
RA02	<p>AMPHIBIA 3000 GRIP H. 1.80 size: 180x2000 cm pallet size: 190x120x130 cm</p>	36	20 ROLLS	720	40051000
RA24	<p>AMPHIBIA 3000 GRIP H. 90 size: 90x2000 cm pallet size: 120x100x125 cm</p>	18	20 ROLLS	360	40051000
	 <p>AMPHIBIA 3000 GRIP 1.3 HYDRO-REACTIVE MULTI-LAYER WATERPROOFING MEMBRANE</p> <ul style="list-style-type: none"> > Absolute impermeability with no lateral water migration > Immediate mechanical protection, self-repairing also on accidental holes > High resistance to hydraulic load > High flexibility and capacity to bridge cracks <p>  UNI EN 13967  BBA - (N° 20/5771)   EPD 0299   </p>				
RA15	<p>AMPHIBIA 3000 GRIP 1.3 H. 1.80 size: 180x2000 cm pallet size: 190x120x130 cm</p>	36	20 ROLLS	720	40051000
RA16	<p>AMPHIBIA 3000 1.3 H. 90 size: 90x1000 pallet size: 120x100x125 cm</p>	9	36 ROLLS	324	40051000

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	m/TUBE	HS CODE
RB01	 AMPHIBIA PRESSURE LINE METALLIC PROFILE, COATED ON ONE SIDE WITH AMPHIBIA 3000 – size: 150x5 cm	CARDBOARD TUBE	PCS. 30x1,5 m	45	40051000


RB02	 AMPHIBIA PRESSURE CORNER CORNER 90° CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE – size: 150x5x10 cm	CARDBOARD TUBE	PCS. 7x1,5 m	10,5	40051000
RB03	 CORNER 270° CORNER METALLIC PROFILE COATED WITH AMPHIBIA 3000 MEMBRANE AND ADHESIVE BUTYLIC TAPE AMPHIBIA SAFETY TAPE BT – size: 150x5x10 cm				

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	HS CODE
RB05	 AMPHIBIA SAFETY TAPE ADHESIVE TAPE FOR OVERLAPPING PROTECTION WHITE COLOUR – size: 6x2500 cm	BOX	ROLL 25 m	39199080

RB08	 AMPHIBIA LAP SEAL BUTYL ADHESIVE TAPE FOR OVERLAPPING GAS SEALING size: 6x1000 cm	BOX	ROLL 10 m	56031410
------	--	-----	--------------	----------

RB04	 AMPHIBIA STOPPER PROTECTION CAP FOR CLOSING HOLES FORMWORK, BLACK COLOUR	BAG	50 PCS.	39012090
------	--	-----	---------	----------




RB09	 AMPHIBIA 3000 STRIP TAPE OF AMPHIBIA 3000 MEMBRANE size: 12x1850 cm	-	ROLL 18,5 m	40029910
------	---	---	----------------	----------

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
GB17	 AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC 310 CC CARTRIDGES	BOX	6 PCS.	310	32141010

RB11	 BI MASTIC DEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE	BOX	12 PCS.	600	32149000
------	--	-----	---------	-----	----------






Bentonite hydro-reactive membranes



CODE	PRODUCT DESCRIPTION	m ² /ROLL	PACKAGING	m ² /PALLET	HS CODE
	 <p>VOLGRIP LH BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE</p> <ul style="list-style-type: none"> > Natural-based product, it earns points for LEED certification > Insuperable self-confinement > High impermeability > It can be drilled, cut and shaped to adapt to the structure <p>CE UNI EN 13491</p>				
A001	VOLGRIP LH H. 2.50 (LIGHT) size: 250x3000x0,64 cm - weight 5,4 kg/m ² approx	75	ROLL	-	6815990000
A003	VOLGRIP LH H. 1.10 (LIGHT) size: 110x500x0,64 cm - weight 5,4 kg/m ² approx (960 kg/pallet)	5,50	ROLL	192,50	6815990000
	 <p>VOLGRIP HP BENTONITE-BASED WATERPROOF MEMBRANE SELF-FASTENING TO CONCRETE WITH INTEGRATED POLYETHYLENE SHEET</p> <ul style="list-style-type: none"> > Insuperable self-confinement > High impermeability even in difficult sites and in the presence of water with high salinity or polluted > It can be drilled, cut and shaped to adapt to the structure > Natural-based product, it earns points for LEED certification <p>CE UNI EN 13491</p>				
AP01	* VOLGRIP HP H. 2.50 (HIGH PERFORMANCE) size: 250x3000x0,64 cm - weight 5,0 kg/m ² approx	75	ROLL	-	6815990000
	 <p>VOLGRIP EP BENTONITE - BASED WATERPROOF GEO MEMBRANE FOR ENVIRONMENTAL PROTECTION</p> <ul style="list-style-type: none"> > Natural-based product, it earns points for LEED certification > It can be drilled, cut and shaped to adapt to the structure > High impermeability even in difficult sites and in the presence of water with high salinity or polluted > Insuperable self-confinement <p>CE UNI EN 13361 UNI EN 13362 UNI EN 13492 UNI EN 13493 UNI EN 13382</p>				
AR02	* VOLGRIP EP size: 250x3000x0,64 cm - weight 5,0 kg/m ² approx	75	ROLL	-	6815990000
AR01	* VOLGRIP EP size: 500x3000x0,64 cm - weight 5,0 kg/m ² approx	150	ROLL	-	6815990000








* Availability to be confirmed in case of order

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	kg/PALLET	HS CODE
DB04	 SALINE SEAL GRANULAR SODIUM BENTONITE ADDITIVATED WITH POLYMERS	BAG	25 kg	1000	25081000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	n°consumption /m ²	HS CODE
AD051	 FIX 1 - POLYETHYLENE WASHERS AND TEMPERED STEEL NAILS size: washer Ø mm 50 - steel nail: lenght mm 30	BOX	500 PCS.	3 PCS.	39012090
AD053	 FIX 5 - POLYETHYLENE WASHER size: washer Ø mm 50	BOX	500 PCS.	3 PCS.	39012090
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
AC044	 AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	BOX	10 PCS.	600	3214101000
AC045	 AKTI-VO BS MASTIC COMPOSED OF NATURAL SODIUM BENTONITE AND BUTYL RUBBER	PAIL	20 kg	-	3214101000






Flexible liquid systems



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	PLASTIVO 180 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > Fast curing and suitable for application on damp substrates > Suitable for contact with drinking water > Resistant to negative hydrostatic pressure				
	CE UNI EN 14891 UNI EN 1504-2 PRINCIPLE PI, MC e IR  EPD 0298 				
EH25	PLASTIVO 180 - 15 kg powder + 5 kg liquid component A: cod. ZH001 15 kg powder - component B: cod. ZZEH2 5 kg liquid	3÷3,5 kg/m ²	BAG + VASE 20 kg	1600	38245090
	PLASTIVO 250 TWO-COMPONENT FLEXIBLE WATERPROOFING COMPOUND > High flexibility > Complete waterproofing cycle within one day > Suitable for contact with drinking water > Suitable for contact with purifier water and domestic wastewater				
	CE UNI EN 14891 UNI EN 1504-2 PRINCIPLE PI, MC e IR 				
EM01	PLASTIVO 250 - 14 kg powder + 6,6 kg liquid component A: cod. ZM001 14 kg powder - component B: cod. ZZM1 6,6 kg liquid	3,5÷4 kg/m ²	BAG + VASE 20,6 kg	1648	38245090
	AQUASCUD SYSTEM 420 TWO-COMPONENT WATERPROOFING PRODUCT > Fast drying even at low temperature conditions (all within 24 hours) > For waterproofing without demolition . > Low environmental impact thanks to reduced CO2 emissions				
	CE UNI EN 14891				
CB06	AQUASCUD SYSTEM 420 - 15 kg powder + 5,7 kg liquid component A: cod. ZD004 15 kg powder - component B: cod. ZZZD5 5,7 kg liquid	3,6÷4 kg/m ²	BAG + VASE 20,7 kg	1656	38245090
	AQUASCUD SYSTEM 430 TWO-COMPONENT WATERPROOFING PRODUCT > It maintains deformability to -20°C > For waterproofing without demolition . > Resistant to UV radiation > Low environmental impact thanks to reduced CO2 emissions				
	CE UNI EN 14891				
CB07	AQUASCUD SYSTEM 430 - 12 kg powder + 6 kg liquid component A: cod. ZD005 12 kg powder - component B: cod. ZZZD6 6 kg liquid	3,2÷3,5 kg/m ²	BAG + VASE 18 kg	1440	38245090
	AQUASCUD REFLEX ELASTIC and SOLAR REFLECTANCE WATERPROOF COATING > Excellent resistance to UV radiation > High waterproof performances & crack bridging ability > Suitable for application on bituminous, cementitious membranes and concrete screeds				
	NEW				
CB12	AQUASCUD REFLEX	1,6÷2,0 kg/m ²	VASE 20 kg	-	32091000






Flexible liquid systems










CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	m ² /PALLET	HS CODE
NEW	AQUASCUD 501 ELASTIC WALKABLE WATERPROOF COATING > Excellent resistance to UV radiation > High waterproof performances & crack bridging ability > Suitable for application on bituminous, cementious membranes and concrete screeds				
CB14	 AQUASCUD 501 grey				
CB15	 AQUASCUD 501 red	1,5÷2,0 kg/m ²	BAG + VASE 20 kg	-	32091000
CB16	 AQUASCUD 501 green				
CC01	 AQUASCUD BASIC MICROPOROUS ELASTICIZED WATER-REPELLENT FLEECE 30 m ² boxes (30x1 m)	BOX	30 mq	960	56031290
CB09	 GRIPPER SKID-PROOF WALKABLE FINISHING POWDER GREY COLOUR	BOX	10 KG	-	25059000


Joint covers and accessories






































CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
EE01	 GARVO due JOINT COVER STRIP REINFORCED WITH THERMO-PLASTIC RUBBER	BOX	25 m	8,5 cm	63079098
ED142	 GARVO 3 JOINT COVER STRIP REINFORCED WITH RUBBER	BOX	20 m	10 cm	63079098
ED141	 GARVO 5 JOINT COVER STRIP REINFORCED WITH RUBBER	BOX	20 m	15 cm	63079098
CD01	 AQUASCUD JOIN ELASTICIZED JOINT COVER BAND	BOX	25 m	10 cm	63079098
CD04	 AQUASCUD JOIN BT ELASTICIZED JOINT COVER BAND WITH ADHESIVE BUTYL RUBBER	BOX	20 m	10 cm	56031410

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	DIMENSION	HS CODE
AQUASCUD JOIN BT CORNER PRE-SHAPED BAND COVER, WITH ADHESIVE BUTYL RUBBER					
CD05	 CORNER 90°	BOX	10 PCS.	12x12 cm	56031410
CD06	 CORNER 270°			10,5x10,5 cm	
GARVO CORNER FELT-COATED RUBBER					
ED144	 CORNER 90°	BOX	10 PCS.	12x12 cm	63079098
ED145	 CORNER 270°			12x12 cm	
EXHAUST/DRAINAGE FELT-COATED RUBBER					
CE04	 EXHAUST/DRAINAGE PIPE Ø80 exhaust/drainage pipe: Ø 72 mm pipe size: Ø 80xh23 cm	BOX	2 PCS.	25x25 cm	39219090
CE02	 EXHAUST/DRAINAGE PIPE Ø100 Exhaust/drainage pipe Ø 92 mm pipe size: Ø 100xh23 cm				
CE03	 GARVO QUADRO JOINT COVER STRIP REINFORCED WITH RUBBER	-	1 PC.	40x40 cm	39219090

Profiles and drainages



CODE	PRODUCT DESCRIPTION	PACKAGING CONTENT	QUANTITY	HS CODE
AQUASCUD H.0 LINE EDGING PROFILE WITH DRAINAGE size: 270x8x5,5 cm				
CF09	GREY COLOUR 	TUBE	1 PC. 2,7 m	76041090
CF12	SPECIAL COLOURS AVAILABLE:    			
AQUASCUD H.10 LINE EDGING PROFILE WITH DOUBLE DRAINAGE size: 270x9x6,5 cm				
CF01	GREY COLOUR 	TUBE	1 PC. 2,7 m	76042990
CF04	SPECIAL COLOURS AVAILABLE:    			
CODE	PRODUCT DESCRIPTION	CONTENT	QUANTITY	HS CODE
AQUASCUD H.0 CORNER 90° CORNER PROFILE FOR AQUASCUD H.0 LINE size: 21x21x5,5 cm				
CF11	GREY COLOUR 	-	1 PC.	76041090
CF14	SPECIAL COLOURS AVAILABLE:    			
AQUASCUD H.0 FIXY CONJUNCTION PROFILE FOR AQUASCUD H.0 LINE				
CF10	GREY COLOUR 	BAG	1 PC.	76041090
CF13	SPECIAL COLOURS AVAILABLE:    			
AQUASCUD H.10 CORNER 90° CORNER PROFILE FOR AQUASCUD H.10 LINE size: 21x21x6,5 cm				
CF03	GREY COLOUR 	-	1 PC.	76042990
CF06	SPECIAL COLOURS AVAILABLE:    			
AQUASCUD H.10 CORNER 270° CORNER PROFILE FOR AQUASCUD H.10 LINE size: 21x21x6,5 cm				
CF07	GREY COLOUR 	-	1 PC.	76041090
CF08	SPECIAL COLOURS AVAILABLE:    			
AQUASCUD H.10 FIXY CONJUNCTION PROFILE FOR AQUASCUD H.10 LINE				
CF02	GREY COLOUR 	BAG	1 PC.	76041090
CF05	SPECIAL COLOURS AVAILABLE:    			






Waterproof mortars – Rapid-setting mortars




CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	 <p>BI MORTAR PLASTER SEAL FIBRE-REINFORCED WATERPROOFING PLASTER</p> <ul style="list-style-type: none"> > It simplifies and reduces the application phases as it evens out and waterproofs in a single application > Also applicable on uneven surfaces > Excellent adhesion > Excellent resistance to negative pressure <p>CE UNI EN 1504-3 CC R3 Rn Radon tested</p>				
IL01	BI MORTAR PLASTER SEAL	18 kg/m ² each mm of thickness	BAG kg 25	1200	38245090
	 <p>BI MORTAR CONCRETE SEAL CEMENT-BASED WATERPROOFING COATING APPLICABLE BY BRUSH</p> <ul style="list-style-type: none"> > Suitable for both indoor and outdoor application > Particularly resistant to abrasion and impact > Suitable for continuous contact with water > Easy maintenance, also in conditions of high humidity and closed environments <p>CE UNI EN 1504-2 PRINCIPLE PI, MC e IR</p>				
IL04	BI MORTAR CONCRETE SEAL	2,5÷3,0 kg/m ²	BAG kg 20	1200	38245090
	 <p>BI MORTAR RASO SEAL LEVELLING FIBRE-REINFORCED WHITE COMPOUND WITH WATERPROOFING AND FINISHING FUNCTION</p> <ul style="list-style-type: none"> > Good surface finish thanks to its fine grain size > Waterproof levelling compound also suitable in conditions of negative hydraulic pressure > Excellent adhesion on most types of substrates such as concrete, mortar, stone, brick > It simplifies and reduces the application phases as it evens out and waterproofs in a single application <p>CE UNI EN 1504-2 PRINCIPLE PI, MC e IR</p>				
IL07	BI MORTAR RASO SEAL - 20 kg powder + 5 kg liquid component A: cod. ZIL01 20 kg powder - component B: cod. ZIL1 5 kg liquid	1,85 kg/m ² each mm of thickness	BAG + PAIL kg 25	1500	38245090
	 <p>BI MORTAR LEVELLING SEAL CEMENT-BASED READY-MIX, SELF-LEVELLING, POURABLE, HIGH ELASTIC MODULE</p> <ul style="list-style-type: none"> > Waterproof > High mechanical resistance > Good levelling properties > High resistance anchorings <p>CE UNI EN 1504-3 R4 UNI EN 1504-6</p>				
IL10	BI MORTAR LEVELING SEAL	19 kg/m ² each mm of thickness	BAG kg 25	1200	38245090

Waterproof mortars – Rapid-setting mortars




CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	 <p>BI MORTAR ULTRA SEAL THREE COMPONENTS EPOXY-CEMENT BASED WATERPROOF SKIM COAT</p> <ul style="list-style-type: none"> > High adhesion on a variety of substrates > Compatible with subsequent coatings > Improves substrate preparation > Application versatility <p>CE UNI EN 1504-2 PRINCIPI MC E IR </p>				
IL11	<p>BI MORTAR ULTRA SEAL 2,2 kg liquid + 8,2 kg liquid + 9,6 kg powder component A: cod. ZZIL11_0 2,2 kg liquid - component B: cod. ZZIL11_18,2 kg liquid component C: cod. ZIL11 9,6 kg powder</p>	1,5 kg/m ² each mm of thickness	BAG + VASES KG 20	-	39073000
	 <p>I-PLUG ULTRA-RAPID WATERPROOF MORTAR</p> <ul style="list-style-type: none"> > Excellent waterproofing > No shrinkage > Instantaneously block water flows, even if pressurised > High mechanical resistance 				
IC186	I-PLUG	10 kg yields 6 liters of mortar	BAG kg 10	800	38245090
	<p>TAP 3 WATERPROOF QUICK-SETTING HYDRAULIC MORTAR</p> <ul style="list-style-type: none"> > Excellent waterproofing > Rapid-setting > No shrinkage > High mechanical resistance 				
IC181	 <p>TAP 3 - 5 kg</p>	5 kg yields 3 liters of mortar	BOX kg 5	600	38245090
IC182	 <p>TAP 3 - 20 kg</p>	20 kg yields 12 liters of mortar	PAIL kg 20	600	38245090
	 <p>SPIDY 15 WATERPROOF QUICK-SETTING MORTAR</p> <ul style="list-style-type: none"> > Good finish results > High adhesion to concrete and reinforcement bars > Rapid-setting also on surfaces and in particularly damp environments > Excellent thixotropy that does not require the use of formwork 				
FH01	SPIDY 15	19 kg/m ² each cm of thickness	BAG 15 kg	1200	38245090




Reinforcement nets – Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
	 <p>REVOMAT FIBERGLASS MESH ALKALI RESISTANT</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability 				
BE00	REVOMAT H.100 mesh size: 40x40 mm – lenght 30 m	ROLL	30	100 cm	70196600
	 <p>REVOGRID H.160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments <p>CE EAD 340392-00-0104 ETA-25/0119</p>				
FN04	REVOGRID H.160 mesh size: 66x66 mm – lenght 30 m	ROLL	48	160 cm	7019660085
	 <p>REVOGRID CORNER 90° CORNER OF MONOLITHIC PREFORMED GFRP MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments <p>CE EAD 340392-00-0104 ETA-25/0119</p>				
FN05	REVOGRID CORNER size: 25x25x160 cm – mesh size: 66x66 cm	WRAPPING	20 PCS.	-	7019660085
	 <p>REVOGRID CONNECTOR-L GFRP L-CONNECTOR</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability <p>CE EAD 340392-00-0104 ETA-25/0119</p>				
FN06	REVOGRID CONNECTOR-L size: Ø 6mm – size: 10x20 cm	BOX	100 PCS.	-	7019660085

Reinforcement nets – Anchors



CODE	PRODUCT DESCRIPTION	CONTENT	cc/PACK	HS CODE
	<p>CONNECTORS CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING</p> <ul style="list-style-type: none"> > Solid anchoring thanks to double disc > Allows for the absence of reinforcement mesh in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them > Quick and easy application thanks to the installation guide disc 			
FN03	 <p>CONNETTORE 20 - size: 80 mm</p>	1 PC.	-	73160000
FN02	 <p>CONNETTORE 38 - size: 185 mm</p>	1 PC.	-	73160000
	 <p>BI FIX 300 AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR</p> <ul style="list-style-type: none"> > Fast, solid and resolutive anchoring > It can be fastened on horizontal, vertical, inclined or overhead axis > Also suitable for fixing on intact or cracked concrete supports, solid and perforated masonry, stone, wood > Applicable on dry, wet or flooded concrete <p>CE EAD 330499-01-0601 ETA-20/0352</p>			
FN01	BI FIX 300 - including 2 nozzles	2 PCS.	300	35069190


JOINTS AND SEALANTS



JONTS AND SEALANTS



Joint cover and accessories
pag. 24

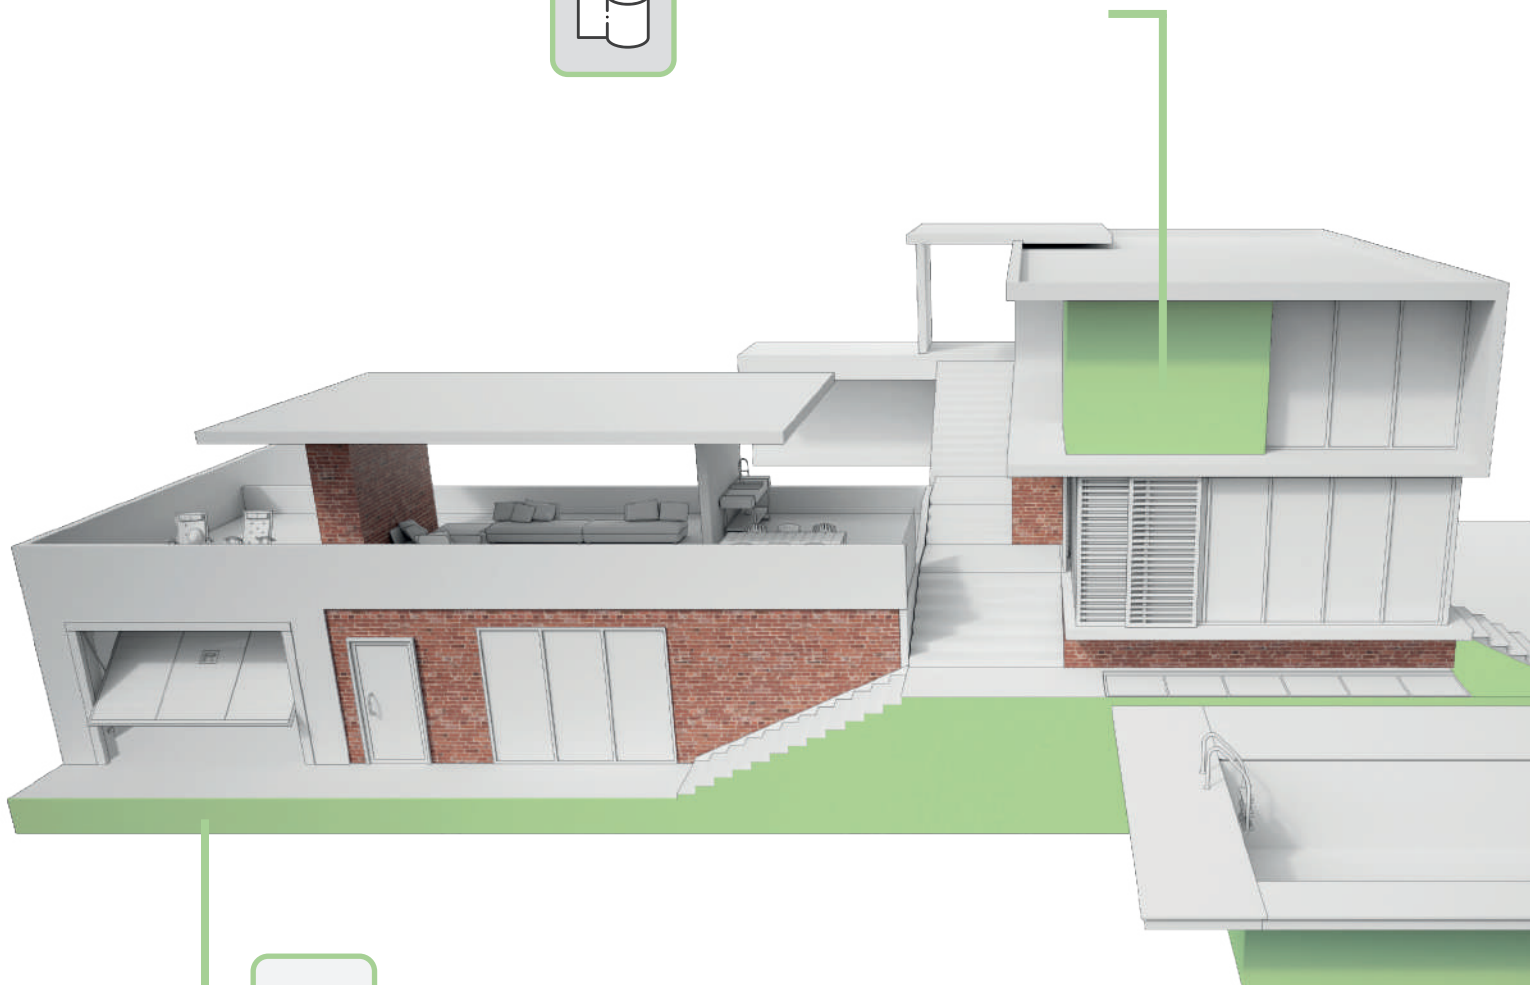

**Waterstop
Hydro-expanding Mastics**
pag. 21



Waterstop - Hydro-expanding mastics



CODE	PRODUCT DESCRIPTION	PACKAGING	m/BOX	m/PALLET	HS CODE
------	---------------------	-----------	-------	----------	---------



WT CONSTRUCTION

EPDM HYDRO-SWELLABLE WATERSTOP REINFORCED WITH STEEL MESH

- > **High resistance** to hydraulic load
- > High hydro-expansive **stability and crack sealing capacity**
- > Excellent **adherence to the surface**
- > **Easy and quick** application by nailing

BF08 NEW	WT C 25.05 - size: 25x5 mm - length 15 m Complete with progressive fixing nails	BOX 3 ROLLS	45 m	2160	40051000
BF02	WT C 20.10 - size: 20x10 mm - length 10 m Complete with progressive fixing nails CE EAD 320008-01-0605 ETA-24/0387	BOX 3 ROLLS	30 m	1440	40051000
BF01	WT C 25.15 - size: 25x15 mm - length 7 m Complete with progressive fixing nails CE EAD 320008-01-0605 ETA-24/0387	BOX 3 ROLLS	21 m	1008	40051000



WT EXPANSION

EPDM HYDRO-SWELLABLE WATERSTOP FOR JOINTS

- > **Perfect seal** of expansion joints
- > **High resistance** to hydraulic load
- > **Easy adaptation** to the size of the structure to be waterproofed in correspondence of the expansion joint

BG01	WT E 20.20 - size: 20x20 mm - length 1,2 m	9 BARS	10,80 m	-	40051000
BG02	WT E 30.30 - size: 30x30 mm - length 1,20 m	4 BARS	4,80 m	-	40051000



WT PANEL

EPDM HYDRO-SWELLABLE MODULAR WATERSTOP PANEL

- > High **hydro-expansive** stability and capacity
- > **Easy adaptation** to the size of the structures to be waterproofed in correspondence of the expansion joint
- > **Can be hot-welded, glued, cut** and adapted to the structure
- > **Perfect seal** of expansion joints and transit elements

GE03	WT P 25 - size: mm 250x5 - length m 10	BOX 1 ROLL	10M	300	40051000
GE04	WT P 125 - size: cm 125x5 - length m 1,2	BOX 20 PANELS	24 M	720	40051000

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	m/PALLET	HS CODE
------	---------------------	-----------	---------	----------	---------

WT STRIP


EPDM HYDRO-EXPANDING WATERSTOP TAPE


- > High **hydro-expansive** stability and capacity
- > **Easy adaptation** to the size of the structures to be waterproofed in correspondence of the expansion joint
- > **Can be hot-welded, glued, cut** and adapted to the structure
- > **Perfect seal** of expansion joints and transit elements





BH01	WT STRIP 30.5 - size: 30x5 mm - length 15 m	BOX 5 ROLLS	75 m	3600 m	40051000
BH02	WT STRIP 50.5 - size: 50x5 mm - length 15 m	BOX 3 ROLLS	45 m	2160 m	40051000

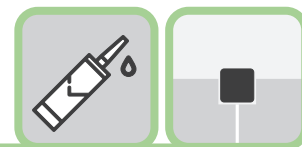


Waterstop - Hydro-expanding mastics




CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	HS CODE
	WT BREAK SELF-SEALING WATERTIGHT BOX PROFILE			
	<ul style="list-style-type: none"> > Perfect hydraulic water-tightness > Maximum control of shrinkage of reinforced concrete > Possibility of preparing continuous concrete castings without joints > Allows the reinforcement bars to be laid without interruptions 			
BC07	WT BREAK - 50.5 size: 17,5x100 cm - thickness 2 cm	BOX	10 BARS	40051000

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
	ULTRABOND POLIMER-BASED ADHESIVE MASTIC TO INSTALL/FIX ADEKA PROFILES				
	<ul style="list-style-type: none"> > Solid, long-lasting adhesion with even adhesive distribution > Resistance to high temperatures, plasticisers, oils and lubricants > Effective in thermal and chemical stress applications > Versatile and easy to apply 				
GC15	ULTRABOND	CAN	0,85 kg	-	39094000




	ULTRATAK SUCTION EFFECT SEALING ADHESIVE				
	<ul style="list-style-type: none"> > Immediate, strong adhesion without temporary supports. > Secure bonding between rubber and concrete, resistant to stress and vibration. > Long-lasting flexibility, absorbs movement and thermal expansion. 				
BI13	ULTRATAK - includes 20 nozzles	BOX	20 PCS.	600 cc	3214109000

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	m/PALLET	HS CODE
WT 102	WT 102 HYDRO-EXPANDING BENTONITE-BASED PROFILE, RED COLOUR COMPLETE WITH RE.VO FIXING NET + PROGRESSIVE NAILS				
	<ul style="list-style-type: none"> > High resistance to hydraulic load > Easy and quick application > Excellent stability and adherence to the surface > High resistance to hydraulic load 				
BD03	 ML 10 - size: 25x20 mm - lenght 5 m includes: 2-roll-box + 10 m RE.VO + nails	BOX 2 ROLLS	10 m	320	40059900
BD02	 ML 30 - size: 25x20 mm - lenght 5 m includes: 6-roll-box + 30 m RE.VO + nails	BOX 6 ROLLS	30 m	720	40059900
BB00	 RE.VO NET Fixing yellow polypropilene net + nails	BOX	30 m	50	39023000



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
	AKTI-VO 201 SYNTHETIC RUBBER HYDRO-EXPANDING MASTIC				
	<ul style="list-style-type: none"> > Resolutive intervention on existing structures > Also applicable on wet and very uneven surfaces > It can support significant loads of water > Practical and fast for accurate applications 				
GB17	AKTI-VO 201	BOX	6 PCS.	310	32141010

Waterstop - Hydro-expanding mastics










CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	HS CODE
	VOL-TEC RECTILINEAR ELEMENTS EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement			
GD01	VOL-TEC RECTILINEAR ELEMENTS size: L 290 x H 100 mm - thickness 50 mm	BOX	3 PCS.	40169300
	VOL-TEC CORNER ELEMENT EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement			
GD02	VOL-TEC CORNER ELEMENT size: 170 x 170 x H 100 mm - thickness 50 mm	BOX	1 PC.	40169300
	VOL-TEC - NO STANDARD NO STANDARD PIECE - EXPANDING PROFILE FOR WIDE EXPANSION JOINTS > The pressure of the rubber structure can be adjusted manually , with torque adjustment possible after application > Easy testing and inspection of the state of efficiency of the profile > Quick and safe installation , thanks to the complete kit of required elements and preparation of the area > The whole guarantees constant pressure between the two parts of the structure, also in case of movement			
GD04	VOL-TEC - NO STANDARD	-	1 PC.	40169300

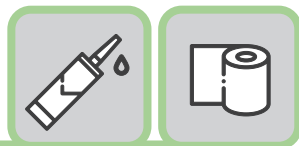Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	-	HS CODE
GD03	 VOL-TEC - STRING HYDRO-EXPANDING RUBBER GASKET	ROLL	25 m	-	39169010
GD05	 VOL-TEC DIMA PRE-CAST GUIDE STANDARD - size: thickness 50 mm - length 1 m	BOX	1 PC.	-	48115900
GD06	PER STRING - size: thickness 55 mm - length 1 m	BOX	1 PC.	-	48115900

Joint cover and accessories




CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH/cm	HS CODE
	BI FLEX SYSTEM TPE POLYMER-BASED ELASTIC BAND > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness , which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water 				
EW05	BI FLEX - H 10 - size: 0,5 mm	BOX	40 m	10	39204910
EW02	BI FLEX - H 10 - size: 1,0 mm	BOX	20 m	10	39204910
EW08	BI FLEX - H 15 - size: 1,0 mm	BOX	20 m	15	39204910
EW01	BI FLEX - H 20 - size: 1,0 mm	BOX	20 m	20	39204910
EW04	BI FLEX - H 20 - size: 1,5 mm	BOX	15 m	20	39204910
CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	BI BOND EPOXY ADHESIVE FOR BONDING BI-FLEX > 100% waterproof with positive/negative hydrostatic pressure > Control over hydraulic water-tightness , which is visible and repairable > High elongation capacity and absorption of dilatation > Excellent adhesion on different substrates, such as concrete, mortar, stone, steel and galvanised steel > Suitable for contact with drinking water 				
EY02	BI BOND - 5 KG (2,5 kg + 2,5 kg) component A - cod. EY12: 2,5 kg - component B - cod. EY13: 2,5 kg	1,5÷1,6 kg/m ² per mm thickness	5 kg PAIL + PAIL	500 + 500	39073000
EY01	BI BOND - 10 KG (5 kg + 5 kg) component A - cod. EY10: 5 kg - component B - cod. EY11: 5 kg	0,6 kg/m BI FLEX H.10 0,8 kg/m BI FLEX H.15 1,0 kg/m BI FLEX H.20	10 kg PAIL + PAIL	500 + 500	39073000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	cc/PACK	HS CODE
	BI MASTIC DEFORMABLE ADHESIVE MASTIC WITH HIGH PERFORMANCE > High thixotropy , adhesion and durability, and U.resistance > Hygroscopic behaviour , cross-linked with environmental humidity > Also applicable on damp surfaces > Applicable on a wide range of surfaces , both absorbent and non-absorbent				
RB11	BI MASTIC	BOX	12 PCS.	600	32149000
CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	HS CODE	
EU01	 SUPERBOND ADHESIVE MASTIC FOR BONDING OF RUBBER GASKETS ON CONCRETE AND JUNCTION OF JOINT COVERING BANDS - with brush dispenser	CAN	0,34 kg	35069190	

JOINTS AND SEALANTS

DAMP-PROOF RESTORATION





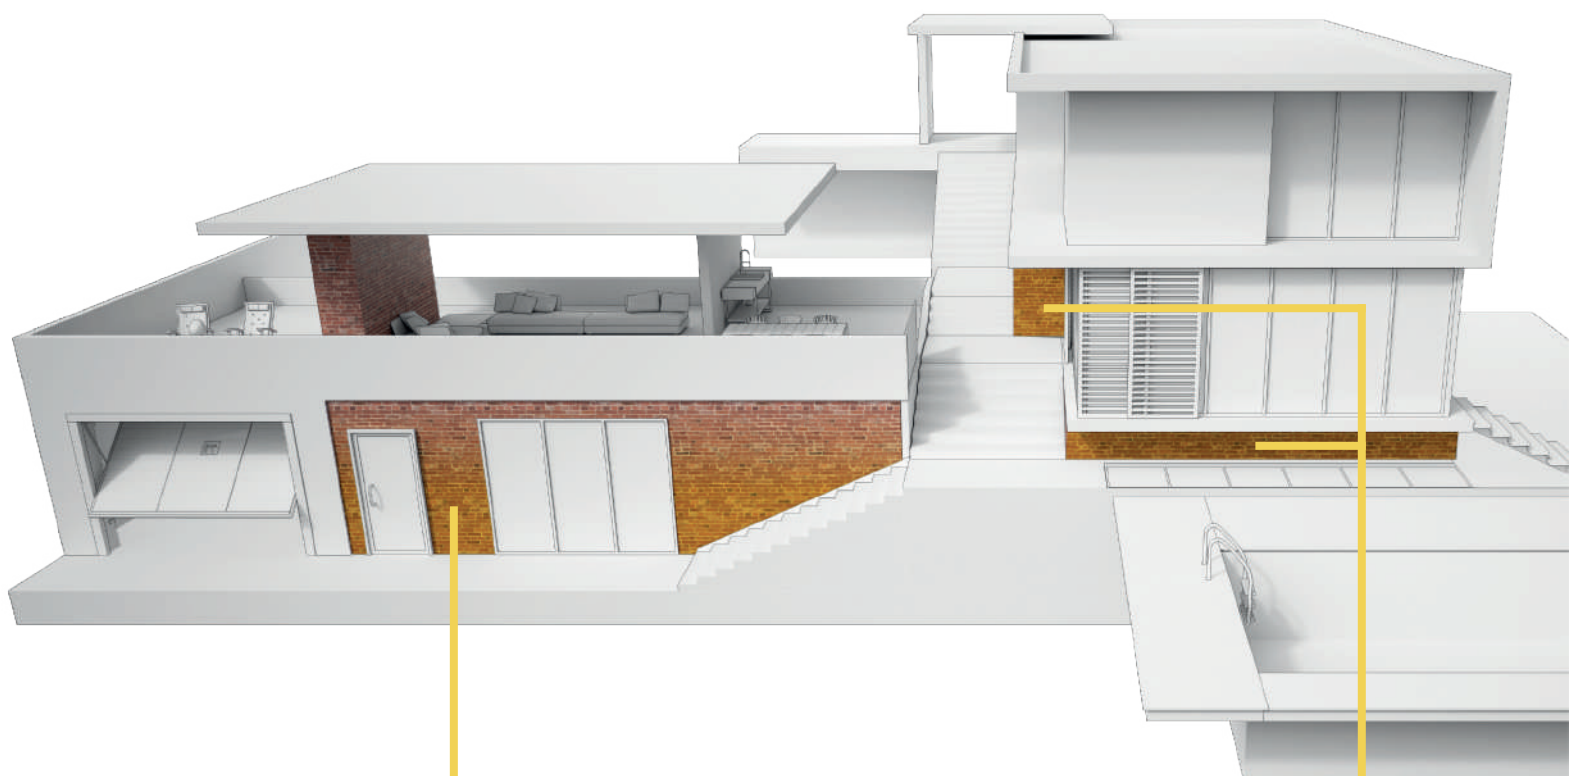


DAMP-PROOF RESTORATION



Damp-proof restoration systems
pag. 27

Damp-proof restoration systems



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
	CALIBRO RINZAFFO READY-MIX SALT-PROOF RENDER > Suitable to coat all types of walls > It guarantees long-lasting sound and stable restoration > It inhibits the development of any form of condensation > Also machine-applicable				
IE153	CALIBRO RINZAFFO	6 ÷ 6,5 kg/m ² each 0,5 cm of thickness	BAG kg 25	1200	38245090
	CALIBRO P.E. INTONACO READY-MIX PLASTER, DAMP-PROOF, SALT-PROOF, CONDENSATION-PROOF > Suitable to coat all types of walls > It guarantees long-lasting sound and stable restoration > It inhibits the development of any form of condensation > Also machine-applicable CE UNI EN 998-1				
IA153	CALIBRO P.E. INTONACO	9 ÷ 9,5 kg/m ² each cm of thickness	BAG kg 20	1200	38245090
	CALIBRO NHL READY-MIX PLASTER WITH NATURAL HYDRAULIC LIME 3.5 DAMP-PROOF, SALT-PROOF, CONDENSATION-PROOF > Natural lime-based product , NHL according to EN 459 > Eco compatible > 2 in 1 : Rough coating and plastering in a single solution > Also machine-applicable CE UNI EN 998-1  EPD 0298				
IM001	CALIBRO NHL	10,5 ÷ 11 kg/m ² each cm of thickness	BAG kg 20	1200	38245090
	X-LIME LIME-BASED PLASTER FINISHING, WHITE COLOUR > High breathability > Easy workability on existing and newly-built surfaces > Excellent finish results , even in the presence of micro-cracks and old paint > Compatibility with old walls CE UNI EN 998-1				
FM001	X-LIME	1,4 kg/m ² each mm of thickness	BAG kg 20	1200	38245090
	TRIPLEZERO SUPER-HYDROPHOBIC ANTI-HUMIDITY CREAMY EMULSION FOR INJECTION. > Ready to use and easy application for injection > Suitable for both indoor and outdoor application > Effective and long-lasting water resistant protection > Odourless and solvent-free				
HL001	 TRIPLEZERO - 600 cc	10 cc x 1 cm of wall thickness x 1 m of wall lenght	BOX 10 PCS.	-	39100000
HL004	 TRIPLEZERO - 15 kg	10 cc x 1 cm of wall thickness x 1 m of wall lenght	VASE 15 kg	-	39100000

NOTES

15 horizontal grey lines for taking notes.

REPAIR AND PROTECTION



RECOVERY AND PROTECTION



Repair Mortars
pag. 31




Waterproof levelling compounds
pag. 34



Reinforcement nets - Anchors
pag. 32



Primers - Paints
pag. 36

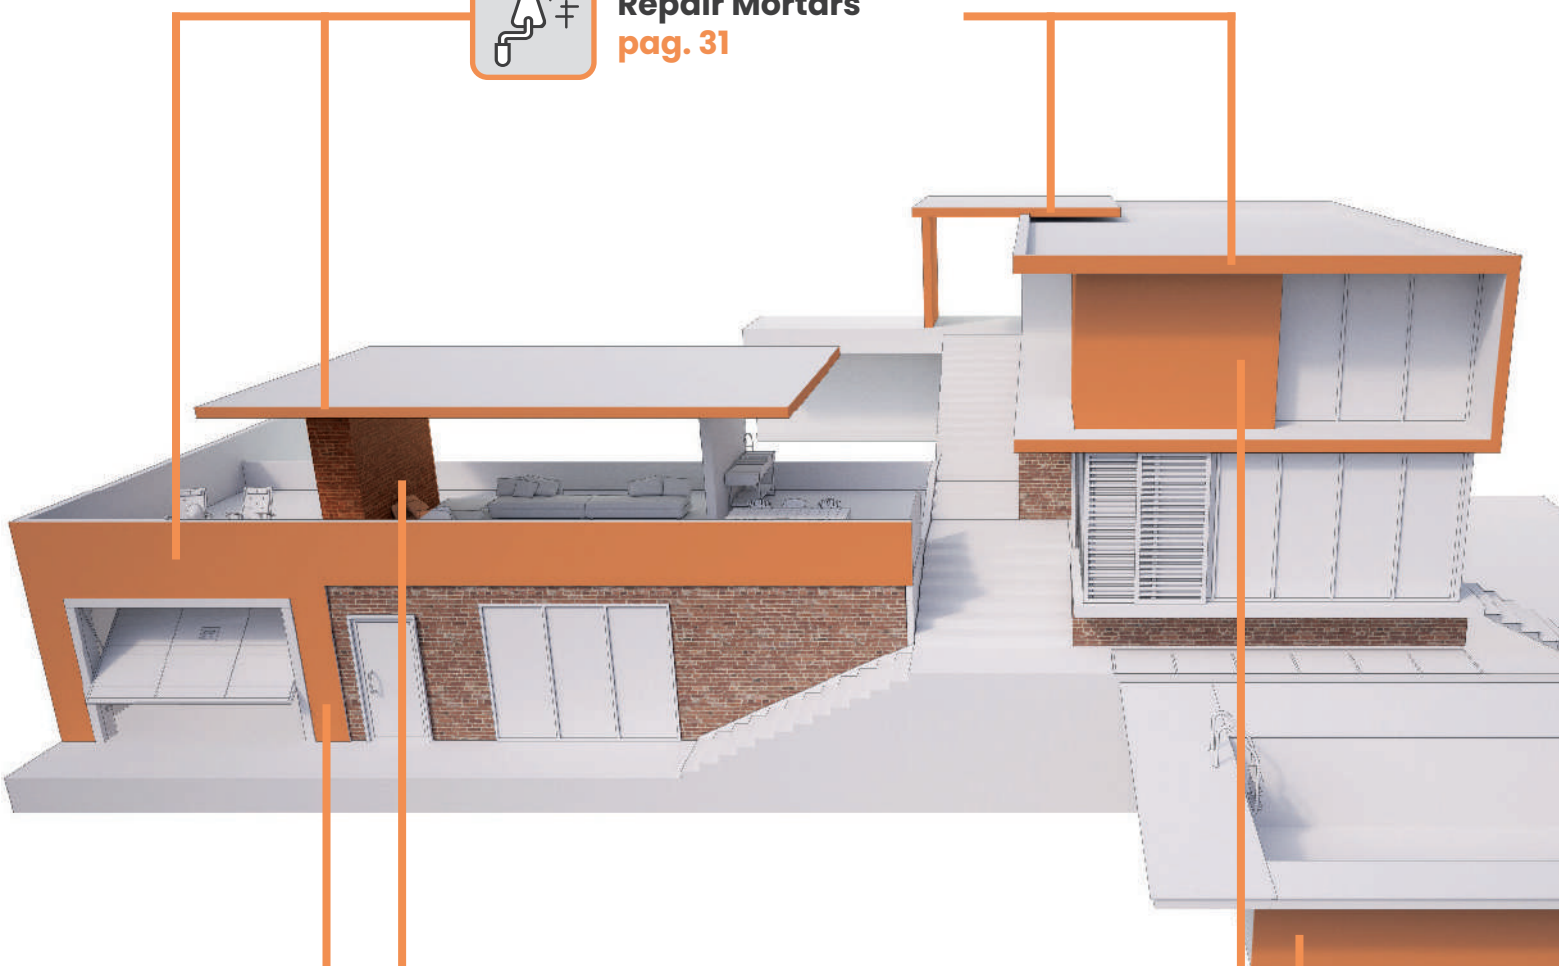


Repair Mortars



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	SANOFER POLYMERS AND CEMENT-BASED PROTECTIVE COATING FOR CORROSION INHIBITION > Also effective on rust-corroded rods > Excellent grip for future repair mortars > Easy and quick application > Use directly on exposed steel bars (CE) UNI EN 1504-7	30 g/m bars ø 8 mm 60 g/m bars ø 16 mm	VASE 1 kg	150	38245090
FB25	SANOFER				
	FIBROMIX 40 CEMENT-BASED READY-MIX, FIBRE-REINFORCED, MEDIUM ELASTIC MODULE > High impermeability > Good resistance against the aggression of atmospheric chemical agents > Excellent adhesion to concrete and reinforcement bars > Light grey colour (CE) UNI EN 1504-3 CC R4	18 kg/m ² for each cm of thickness	BAG 25 kg	1200	38245090
FA262	FIBROMIX 40				
	FIBROERASO SEMI-RAPID THIXOTROPIC MORTAR WITH MEDIUM MODULUS ELASTICITY AND CONTROLLED SHRINKAGE > High impermeability > Easy workability and rapid application > High resistance to carbonation > Excellent adhesion to concrete and reinforcement bars (CE) UNI EN 1504-3 CC R4 UNI EN 1504-2 PRINCIPI MC e IR	17,5 kg/m ² for each cm of thickness	BAG 20 kg	1200	38245090
FA264	FIBROERASO				
	FLEXOMIX 30 CEMENT-BASED READY-MIX, LOW ELASTIC MODULE > High impermeability > Good resistance against the aggression of atmospheric chemical agents > Low modulus of elasticity that is capable of following the movements of the structure > Excellent thixotropy that allows the product to be applied without formwork (CE) UNI EN 1504-3 PCC R3	16 kg/m ² for each cm of thickness	BAG kg 25	1200	38245090
FF26	FLEXOMIX 30				
	FIBRO HFR THREE-COMPONENT FLOWABLE REPAIR MORTAR REINFORCED WITH STEEL FIBERS > The presence of the steel fibre gives it its firm behaviour > Applicable in thicknesses between 1 and 10 cm > Total resistance to carbonation phenomena > Very high mechanical compression and flexural strength (CE) UNI EN 1504-3 CC R4  EPD 0298	MIXING RATIO: 100 KG POWDER + 14 kg LIQUID + 5 kg FIBERS			
FI03	 FIBRO HFR - COMPONENT A - POWDER		BAG 25 kg	1200	38245090
FI04	 FIBRO HFR - COMPONENT B - LIQUID	25 kg (A + B + C) per cm thickness	VASE 14 kg	616	2909430000
FI05	 STEEL FIBERS - COMPONENT C - STEELS		BOX 5 kg	-	83089000




Reinforcement nets – Anchors



CODE	PRODUCT DESCRIPTION	PACKAGING	CONTENT	WIDTH	HS CODE
BE00	 <p>REVOMAT FIBERGLASS MESH ALKALI RESISTANT</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability 				
	<p>REVOMAT H.100 mesh size: 40x40 mm – lenght 30 m</p>	ROLL	30	100 cm	70196600
FN04	 <p>REVOGRID H.160 MONOLITHIC PREFORMED GFRP STRUCTURAL MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments 				
	<p>CE EAD 340392-00-0104 ETA-25/0119</p> <p>REVOGRID H.160 mesh size: 66x66 mm – lenght 30 m</p>	ROLL	48	160 cm	7019660085
FN05	 <p>REVOGRID CORNER 90° CORNER OF MONOLITHIC PREFORMED GFRP MESH</p> <ul style="list-style-type: none"> > High mechanical strength: ensures long-lasting, high-performance reinforcement > Lightweight and easy to install: simplifies installation and reduces work times > Compatibility with traditional materials: excellent adhesion with common mortar and masonry > Chemical resistance: resistant to weathering and aggressive environments 				
	<p>CE EAD 340392-00-0104 ETA-25/0119</p> <p>REVOGRID CORNER size: 25x25x160 cm – mesh size: 66x66 cm</p>	WRAPPING	20 PCS.	-	7019660085
FN06	 <p>REVOGRID CONNECTOR-L GFRP L-CONNECTOR</p> <ul style="list-style-type: none"> > Good flexibility to facilitate shaping for changes in direction > Excellent durability, unalterable in damp and chemically aggressive environments > High tensile strength (approximately 3 times greater than steel) > It features a special anti-alkaline surface treatment (finish) which enhances the properties and provides dimensional stability 				
	<p>CE EAD 340392-00-0104 ETA-25/0119</p> <p>REVOGRID CONNECTOR-L size: Ø 6mm – size: 10x20 cm</p>	BOX	100 PCS.	-	7019660085


Reinforcement nets – Anchors








CODE	PRODUCT DESCRIPTION	CONTENT	cc/PACK	HS CODE
	<p>CONNETTORI CARBON STEEL CONNECTOR WITH ELECTROLYTIC GALVANIZING</p> <ul style="list-style-type: none"> > Solid anchoring thanks to double disc > Allows for the absence of reinforcement mesh in combination with thin fibre-reinforced mortars. In the presence of metal meshes, it does not require fixing to them > Quick and easy application thanks to the installation guide disc 			
FN03	 <p>CONNETTORE 20 - size: 80 mm</p>	1 PC.	-	73160000
FN02	 <p>CONNETTORE 38 - size: 185 mm</p>	1 PC.	-	73160000
	 <p>BI FIX 300 AMPHIBIOUS TWO-COMPONENTS CHEMICAL ANCHOR</p> <ul style="list-style-type: none"> > Fast, solid and resolutive anchoring > It can be fastened on horizontal, vertical, inclined or overhead axis > Also suitable for fixing on intact or cracked concrete supports, solid and perforated masonry, stone, wood > Applicable on dry, wet or flooded concrete <p>CE EAD 330499-01-0601 ETA-20/0352</p>			
FN01	BI FIX 300 - including 2 nozzles	2 PCS.	300	35069190

Waterproof levelling compounds




CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	KG/PALLET	HS CODE
	 <p>X-LIME LIME-BASED PLASTER FINISHING, WHITE COLOUR</p> <ul style="list-style-type: none"> > High breathability > Easy workability on existing and newly-built surfaces > Excellent finish results, even in the presence of micro-cracks and old paint > Compatibility with old walls <p>CE UNI EN 998-1</p>	1,4 kg/m ² each mm of thickness	BAG kg 20	1200	38245090
FM001	X-LIME				

	 <p>CPI WATERPROOFING, ELASTIC, HIGHLY BREATHABLE MINERAL COATING TWO-COMPONENT IN WHITE COLOUR</p> <ul style="list-style-type: none"> > Breathability and elasticity all in one solution > Extremely effective anti-carbonation barrier to protect the concrete > High protection that extends the service life of the structure > Resistant to the formation and proliferation of fungi, algae and mould <p>CE UNI EN 1504-2 PRINCIPI MC e IR  EPD 0298</p>	2,5 kg output a thickness of 2 mm/m ²	BAG + VASE 20,7 kg	1656	38245090
ER01	CPI (15 kg powder + 5,7 kg liquid) component A: cod. ZR001 - 15 kg powder - component B: cod. ZZZR1 - 5,7 kg liquid				



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	GRANULOMETRY	kg/PALLET	HS CODE
	<p>CPØ ACRYL-SILOSSANIC READY-TO-USE PIGMENTED COATING HIGHLY BREATHABLE, ELASTIC AND WATER-REPELLENT FOR INDOOR AND OUTDOOR USE</p> <ul style="list-style-type: none"> > Fine aesthetic appearance, available in different sizes > Compact effect, excellent filling and covering capability > Resistant to the formation and proliferation of mould, algae and fungi > Long-lasting thanks to high resistance to atmospheric agents and UV rays <p>CE UNI EN 15824</p>				
	0,4 mm				
ER05A	 CPØ (color group A)	1,6÷1,8 kg/m ²	0,4 mm	VASE 25 kg	32099000
ER05B	CPØ (color group B)				
	1,0 mm				
ER03A	 CPØ (color group A)	1,8÷2,0 kg/m ²	1,0 mm	VASE 25 kg	32099000
ER03B	CPØ (color group B)				
	1,2 mm				
ER02A	 CPØ (color group A)	2,0÷2,2 kg/m ²	1,2 mm	VASE 25 kg	32099000
ER02B	CPØ (color group B)				
	1,5 mm				
ER04A	 CPØ (color group A)	2,2÷2,5 kg/m ²	1,5 mm	VASE 25 kg	32099000
ER04B	CPØ (color group B)				

Waterproof levelling compounds







CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	kg/PALLET	HS CODE
	 <p>TRIPLEZERO - T SUPERHYDROFOBIC DAMP-PROOFING CREAMY EMULSION APPLICABLE BY ROLLER/BRUSH/AIRLESS > Suitable for both indoor and outdoor application > Effective and long-lasting transparent protection > Excellent resistance against ageing agents such as UV rays, un/freezing, marine aerosol</p>				
HL002	TRIPLEZERO - T 5 kg	100÷400 g/m ²	VASE kg 5	-	39100000
HL005	TRIPLEZERO - T 15 kg	100÷400 g/m ²	VASE kg 15	-	39100000

Accessories

CODE	PRODUCT DESCRIPTION	PACKAGING	WIDTH	LENGHT	HS CODE
	 <p>XNET MULTIDIRECTIONAL SYNTHETIC COMPOSITE ELASTICIZED NET</p>				
ET07	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	56031290
ET06	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	56031290
ET05	H.100 - size: 50x1 m	ROLL	100 cm	50 m	56031290
	 <p>FLEXONET ELASTIC POLYPROPYLENE REINFORCING NET</p>				
ET03	H.16 - size: 50x0,16 m	ROLL	16 cm	50 m	60053500
ET02	H.33 - size: 50x0,33 m	ROLL	33 cm	50 m	60053500
ET01	H.100 - size: 50x1 m	ROLL	100 cm	50 m	60053500

Primers – Paints – Resins





CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	HS CODE
	PROCLEAN DISINFECTANT AND ANTIMYCOTIC TREATMENT <ul style="list-style-type: none"> > It disinfects contaminated surfaces > It does not require dilution with water > Not film-forming > Can be applied in closed and poorly ventilated environments as it is solvent-free 			
EC254	PROCLEAN – 5 l	0,15 L/m ²	CAN 5 L	39069090
EC255	PROCLEAN – 20 l		CAN 20 L	39069090
	PROFIX 20 POLI-SILOSSANIC AND ACRILIC PRIMING TREATMENT TO CONSOLIDATE AND REGULARIZE THE ABSORPTION OF SUBSTRATES, MOSTLY CONCRETE-BASED <ul style="list-style-type: none"> > To strengthen the surface, preventing the formation of a superficial film > Removes dust from mineral surfaces > Increases the adhesion of levelling compounds, coatings or finishes in general > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free 			
EC253	PROFIX 20 – 5 L	0,2÷0,3 L/m ²	CAN 5 L	39069090
	PROFIX 30 PRIMING TREATMENT TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES <ul style="list-style-type: none"> > High penetrating power and effective strengthening effect, even with low-porous surfaces > Removes dust from mineral surfaces > It increases adhesion of coatings, finishes and waterproofing products to the surface > Can be applied in closed and poorly ventilated environments as it is odourless and solvent-free 			
EN01	PROFIX 30 – 5 L	0,2÷0,3 L/m ²	CAN 5 L	39069090
EN02	PROFIX 30 – 25 L		CAN 25 L	39069090
	PROFIX 40 COLOURED PRIMER FOR CP0 CONSUMPTION, TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES <ul style="list-style-type: none"> > Good water resistance and vapour permeability > Good coating capacity > It increases the adhesion of CP0, PAINT AIR and PAINT PROTECTION > Can be applied in closed and poorly ventilated environments as it is solvent-free 			
	5 LITERS			
EN05	PROFIX 40 (colors group A)	0,15÷0,3 L/m ²	VASE 5 L	39069090
EN06	PROFIX 40 (colors group B)			
	14 LITERS			
EN03	PROFIX 40 (colors group A)			VASE 14 L
EN04	PROFIX 40 (colors group B)			

Primers – Paints – Resins




















CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	HS CODE
	<p>PROFIX 50 COLOURED PRIMER FOR CP0 CONSUMPTION, TO INCREASE ADHESION PERFORMANCES ON CONCRETE SUBSTRATES</p> <ul style="list-style-type: none"> > Creates a rough surface layer, increasing the anchoring and adhesion of the treated substrate. > On old bituminous membranes, it evens out and consolidates the surface, reducing the migration of oils and plasticizers. > Eliminates dust from mineral substrates. > Non-toxic and solvent-free, safe for operators and the environment. 			
NEW				
EN05	PROFIX 50	0,2÷0,5 L/m ²	VASE 5 L	39069090
	<p>PAINT AIR ACRYL-SILOSSANIC PAINT, HIGHLY PERMEABLE TO VAPOUR, WATER-REPELLENT, DEFORMABLE, RESISTANT TO ATMOSPHERIC AGENTS</p> <ul style="list-style-type: none"> > Excellent water repellency > Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) > Highly resistant to UV rays > Vast range of colours available 			
ES01A	PAINT AIR (color group A)	0,3 L/m ²	VASE 14 L	32091000
ES01B	PAINT AIR (color group B)			32091000
	<p>PAINT PROTECTION WATERPROOF STYROL-ACRYLIC PAINT, RESISTANT TO ATMOSPHERIC AGENTS, ANTI-CARBONATION AND EXCELLENT PERMEABILITY TO VAPOUR</p> <ul style="list-style-type: none"> > Extremely effective anti-carbonation barrier to protect the concrete > Excellent resistance against aggressive physical and chemical atmospheric agents (ex: wind, smog, etc) > Highly resistant to UV rays > Vast range of colours available <p>CE UNI EN 1504-2</p>			
EG24A	PAINT PROTECTION (color group A)	0,4 L/m ²	VASE 14 L	32091000
EG24B	PAINT PROTECTION (color group B)			32091000
	<p>CRYSTAL ONE-COMPONENT, TRANSPARENT, OPAQUE, ACRYLIC RESIN BASED, SOLVENT-FREE PAINT</p> <ul style="list-style-type: none"> > Stable under UV rays and resistant to yellowing > Reduces absorption of water, oil and liquids in general > Colourless (darkening in the surface might occur) > Improves wear resistance 			
EQ19	CRYSTAL - 3 I	0,30÷0,34 L/m ²	VASE 3 l	32099000
EQ20	CRYSTAL - 14 I		VASE 14 l	



CODE	PRODUCT DESCRIPTION	CONSUMPTION OUTPUT	PACKAGING CONTENT	HS CODE
	 <p>CRYSTAL POOL SINGLE-COMPONENT, SATIN-EFFECT, ACRYLIC RESIN BASED, WATER-DISPERSED, SOLVENT-FREE PAINT AVAILABLE IN WHITE, SAND AND BLUE</p> <ul style="list-style-type: none"> > Excellent water resistance even with chlorine and chemical agents > Suitable for contact with drinking water > Great resistance to UV radiation > Solvent-free 			
EQ16	CRYSTAL POOL WHITE ○			
EQ17	CRYSTAL POOL SAND ●	0,32÷0,40 L/m ²	VASE 4 L	32099000
EQ18	CRYSTAL POOL BLUE ●			
EQ11	CRYSTAL POOL WHITE ○			
EQ12	CRYSTAL POOL SAND ●	0,32÷0,40 L/m ²	VASE 14 L	32099000
EQ13	CRYSTAL POOL BLUE ●			
EQ14	CRYSTAL POOL (color group A) MINIMUM SUPPLY 28 L	0,32÷0,40 L/m ²	VASE 14 L	32099000
EQ15	CRYSTAL POOL (color group B) MINIMUM SUPPLY 28 L			
	 <p>CRYSTAL PURE TWO COMPONENTS WATERPROOFING WHITE EPOXY COATING SUITABLE FOR PERMANENT CONTACT WITH DRINKABLE WATER</p> <ul style="list-style-type: none"> > White colour > Suitable for drinkable water 			
EQ21	CRYSTAL PURE (8,3 kg + 4,5 kg) component A: base 8,3 kg - component B: reagent 4,54 kg	÷300 g/m ²	12,84 kg	39073000

Work tools

CODE	PRODUCT DESCRIPTION		CONTENT	HS CODE
HG113		BRUSH	SINGLE PIECE	82055910
HG110		SPIKE ROLLER – 7 kg FOR THE APPLICATION OF AQUASCUD BASIC, PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
HG116		SPIKE ROLLER – REPLACEMENT	SINGLE PIECE	960340900
HG115		SERRATED METAL SQUEEGEE PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	82055910
HG116		SERRATED TROWEL 3,5 mm FOR THE APPLICATION OF AQUASCUD	SINGLE PIECE	82055910
HG117		ROUND TROWEL FOR THE APPLICATION OF CP, X-LIME, AQUASCUD	SINGLE PIECE	82055910
HG118		SERRATED TROWEL 2 mm	SINGLE PIECE	82055910
EP01		PLASTIVO ROLLER PROVIDED WITHOUT WOOD HANDLE	SINGLE PIECE	960340900
EP02		PLASTIVO ROLLER – REPLACEMENT	SINGLE PIECE	960340900

CODE	PRODUCT DESCRIPTION		PACKAGING	CONTENT	HS CODE
HL003		UNIPACK GUN COMPLETE WITH TRIPLEZERO NOZZLE, INJECTION TUBE, BI MASTIC NOZZLE, AKTI-VO BS NOZZLE	BOX	SINGLE PIECE	82055980
HL006		KIT TRIPLEZERO COMPLETED WITH INJECTION TUBE OF 1MM	BAG	5 PCS.	82055980
HL008		AKTI-VO BS KIT	BAG	5 PCS.	82055980
HL009		KIT BI FIX	BAG	3 PCS.	82055980
HL010		BI MASTIC KIT	BAG	5 PCS.	82055980
HL011		SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL012		GASKET SPOUT HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980
HL013		NOZZLE HOLDER FOR UNIPACK	-	SINGLE PIECE	82055980



1976 | 2026

Informazioni, immagini, testi contenuti nel presente depliant illustrativo sono proprietà di Volteco spa; le stesse sono da considerarsi puramente indicative e suscettibili di modifica in qualsiasi momento e senza preavviso. Su www.volteco.com è disponibile la versione più aggiornata della presente documentazione.

AT | D | 04 | 00 | 04/2026 | N