Connection between AMPHIBIA under the raft foundation and AMPHIBIA installed vertically on the internal side of formw

Field
Type of work
Boundary conditions
Construction
Excavation type
Type of material(s)
Sequence of installation
Level of risk

Underground waterproofing Reinforced concrete

Aquifer New Free

HYDRO-REACTIVE SYSTEM

Before pouring concrete

High

Waterproofing barrier




1. Lean concrete

Type of protection

- 3. Concrete protective screed (optional)
- 5. WT
- 7. RC wall suitable to withstand hydraulic pressures and exempt from defects
- 9. AMPHIBIA STOPPER with AKTI-VO 201 to seal the distance tubes
- 11. Well compacted soil without voids

- 2. AMPHIBIA 3000 GRIP
- 4. RC raft foundation suitable to withstand hydraulic pressures and exempt from defects
- 6. Overlaps fixed with BI MASTIC
- 8. PVC distance tube to seal
- 10. Rigid insulation panel or non-woven textile (min 250 g/m²)

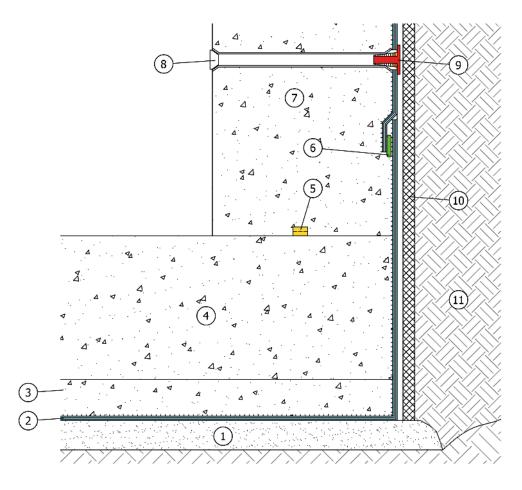

PLEASE NOTE: Do not make Amphibia overlaps around the construction joint areas.
PLEASE NOTE: The waterproofing systems must be installed continuously all along the whole structure subjected to intervention and up till the ground level, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint, penetration and every possible crack must be sealed with suitable VOLTECO systems, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage.

The structures must be suitable to withstand hydraulic pressures and every kind of load that they will undergo.



for example purposes) and its implementation must be assessed and approved by the Designer and the Construction Supervisor in relation to the re information about the application, performances and technical data of the technologies that we have here described must be obtained from the website www.volteco.it); those datasheets are considered part of this document. This proposed scheme (out of scale and released only for example purposes) and its implementation must be a specific issues of the project and the building site. More information about the application, performances and product datasheets (also freely downloadable from the website www.volteco.it); those datasheets are consider