

CONSTRUCTION JOINT WITH AMPHIBIA PRE-APPLIED AGAINST FORMWORKS

Field	Underground waterproofing
Type of work	Reinforced concrete
Boundary conditions	Aquifer
Construction	New
Excavation type	Confined
Type of material(s)	HYDRO-REACTIVE SYSTEM
Sequence of installation	Before pouring concrete
Level of risk	High
Type of protection	Waterproofing barrier

1. Lean concrete

3. Concrete protective screed (optional)

5. WT (optional)

7. BI MASTIC

9. BI MASTIC or AKTI-SEAL 201

11. RC wall suitable to withstand hydraulic pressures and exempt from defects

13. AMPHIBIA STOPPER with AKTI-SEAL 201 to seal the spacer tube

15. Well compacted soil without voids
2. AMPHIBIA 3000 GRIP

4. RC raft foundation suitable to withstand hydraulic pressures and exempt from defects

6. BI FLEX SYSTEM H. 10 - 0,5 mm


8. AMPHIBIA 3000 GRIP after casting concrete

10. AMPHIBIA PRESSURE LINE

12. PVC distance tube to seal

14. Rigid insulation panel or non-woven textile (min 250 g/m²)

16. (*) Use BI MASTIC to fix all vertical overlaps of the sheets installed along the formworks

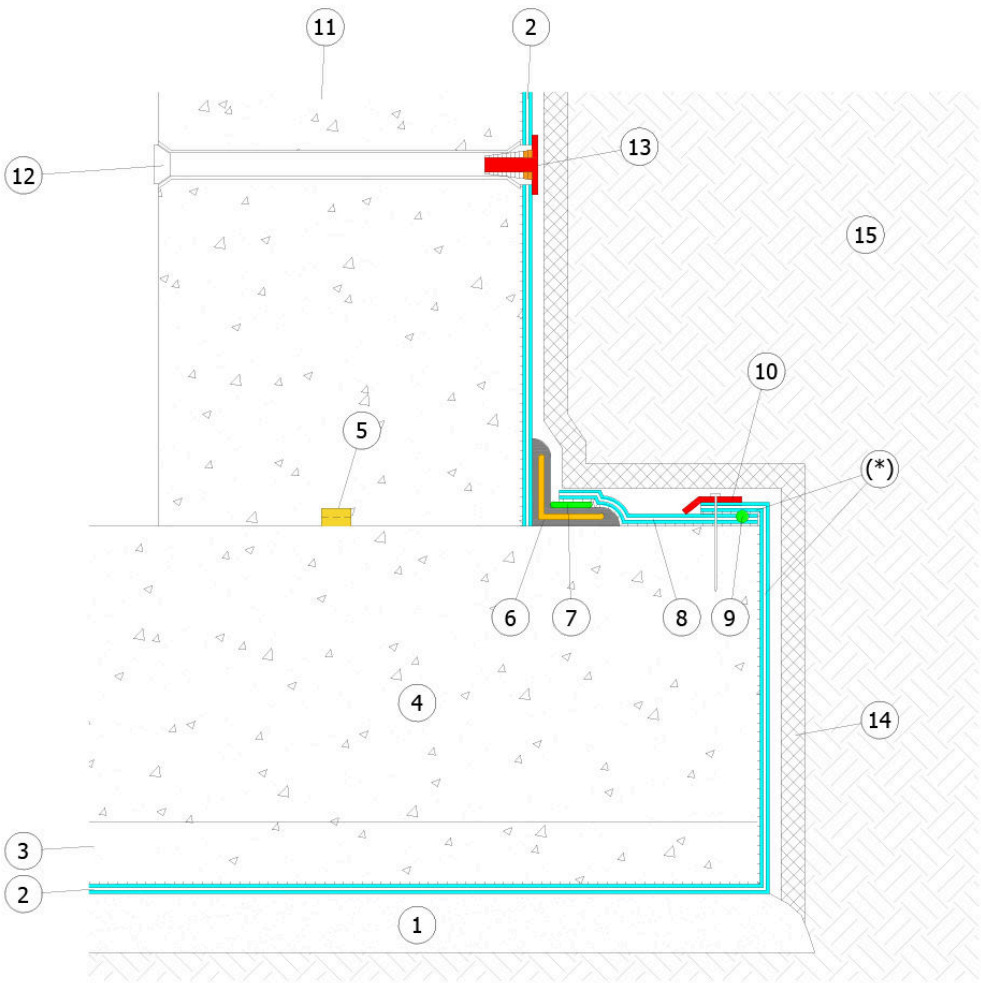

PLEASE NOTE: Do not make Amphibia overlaps around the construction joint areas.

PLEASE NOTE: The waterproofing systems must be installed continuously all along the whole structure subjected to intervention and up till the ground level, keeping the continuity between all waterproofed surfaces, horizontal and vertical; any kind of joint, penetration and every possible crack must be sealed with suitable VOLTECO systems, applied in continuity with one another (see VOLTECO technical data sheets), in order to avoid any chance of seepage.

The structures must be suitable to withstand hydraulic pressures and every kind of load that they will undergo.

This proposed scheme (out of scale and released only for example purposes) and its implementation must be assessed and approved by the Designer and the Construction Supervisor in relation to the specific issues of the project and the building site. More information about the application, performances and technical data of the technologies that we have here described must be obtained from the product datasheets (also freely downloadable from the website www.volteco.it); those datasheets are considered part of this document.